

DUO 6

ELEGANT 6 INCH UP AND DOWN LUMINAIRE

Housing

Diameter : Ø6.37" | Height : 20" | Weight : 15.2 lbs

Material

Housing: Extruded Aluminum

Lens: Clear polycarbonate

Power Input

Downlight: 25W, 50W, 70W | 120-277V

Uplight: 25W | 120-277V

Lumen Output

Downlight: 2,205 lm (25W), 4,305 lm (50W), 6,475 lm (70W)

Uplight: 1,045 lm (25W/RGB)

Dimming

DMX: High resolution dims to 0.1% (RJ45 only)

(Supports ANSI E1.20 RDM protocol)

Dual Dimming (Controls Up/Down Separately)

Color Quality

CRI 85 | UGR ≤ 19

Rated Life

> 100,000 Hours (L70)

Finish



Black



White

Color Temperature



2700K



3000K



3500K



4000K



Archi-Color™
RGB

Optics



60°
UP/DOWN



WIDE
UP/DOWN

Mounting



Power Line



Power Line
Remote Power

Warranty

5 Year limited warranty

Listing



Intertek


SPECIFICATION SHEET RGB UPLIGHT

Revolutionary Mounting System

With a unique High Lumen Power Suspension System, the Duo series is an elegant, cable-free and aesthetic up and downlight solution.

With a seamless connector and hidden signal wire, this luminaire seamlessly blends into your environment and space.

Duo gives you perfect optics with intuitive design making it a decorative element that adds a touch of class.

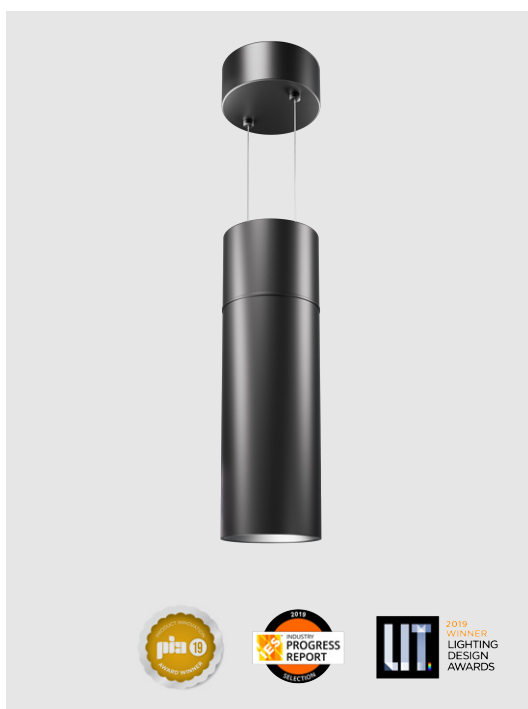

METEOR

meteor-lighting.com

SPECIFICATION SHEET / RGB UPLIGHT

DUO 6 ELEGANT 6 INCH
UP AND DOWN LUMINAIRE

METEOR

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

| | | | | |
|--------------|------------|---|--|--|
| DUO6 | MODEL | DUO 6 | | |
| | WATTAGE | 50 Downlight: 25W Uplight: 25W | 75 Downlight: 50W Uplight: 25W | 95 Downlight: 70W Uplight: 25W |
| | CCT / CRI | Downlight 278 2700K / CRI 85 308 3000K / CRI 85 358 3500K / CRI 85 408 4000K / CRI 85 | | |
| RGB | | Uplight RGB | | |
| UNV | VOLTAGE | UNV 120 – 277V | | |
| DMXRD | DIMMING | With Signal Wire DMXRD¹ DMX dims to 0.1% Dual (Up/Down Separately) | | |
| | BEAM ANGLE | Downlight 60 60° WD² Wide | | |
| | | Uplight 60 60° WD² Wide | | |
| | FINISH | BLK Black WHT White | | |
| | MOUNTING | PL2 (2 / 4 / 6 / 8 / 10) Power Line Mount (2, 4, 6, 8, and 10 ft.) PL2RM (2 / 4 / 6 / 8 / 10) Power Line Mount with Remote Power (2, 4, 6, 8, and 10 ft.) | | |

¹ Option only applies to RJ45 Socket² Please factor in change in lumen output with WD -20%

TECHNICAL DETAILS

Electrical

- Downlight: 2,205 lm (25W), 4,305 lm (50W), 6,475 lm (70W)
- Uplight: 1,045 lm (25W/RGB)
- Power Input: Universal (120-277V)
- Operating Temperature: -13°F~104°F
- Surge Protection: Built-in is 2.5KV
- Power Factor Greater than 0.9

LED Features

- Color Temperature: 2700K, 3000K, 3500K, 4000K and RGB
- CRI 85
- UGR ≤ 19
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

Optics

- Precision molded high transmittance clear lenses
- Beam Angle: Up&Down: 60°, WD

Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting

With Signal Wire

- DMX: high resolution dims to 0.1% (RJ45 only)
(Supports ANSI E1.20 RDM protocol)
- Dual Dimming (Controls Up/Down Separately)

Housing

- Diameter: Ø6.37"
- Height: 20"
- Material: Extruded Aluminum
- Weight: 15.2 lbs
- Canopy Height: 2.95"

Mounting

- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft (Canopy Height: 2.95")
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft with Remote Power (Canopy Height: 0.84")

Warranty

- 5-year limited warranty

Listing

- ETL Listed

PERFORMANCE SUMMARY*


| Delivered Lumens | | | | |
|------------------------|---------|---------|---------|---------|
| Uplight (25W) | R | G | B | |
| | 125lm | 820lm | 100lm | |
| 50W DOWNLIGHT (25W) | 2700K | 3000K | 3500K | 4000K |
| | 1,900lm | 2,060lm | 2,180lm | 2,205lm |
| 75W DOWNLIGHT (50W) | 2700K | 3000K | 3500K | 4000K |
| | 3,720lm | 3,980lm | 4,210lm | 4,305lm |
| 95W DOWNLIGHT (70W) | 2700K | 3000K | 3500K | 4000K |
| | 5,745lm | 6,230lm | 6,390lm | 6,475lm |

| Current Consumption | | |
|---------------------|-------|-------|
| WATTAGE / VOLT | 120V | 277V |
| 30W | 0.28A | 0.12A |
| 50W | 0.46A | 0.20A |
| 75W | 0.69A | 0.30A |
| 95W | 0.87A | 0.38A |


* Tolerance ±8%

PHOTOMETRICS

Below is a typical photometric representation of the Duo 6 fixture. Please download IES files to ensure exact photometric value.



60°



WIDE

DMX REQUIREMENTS


The Duo 6 static white + Archi-Color™ RGB fixture with DMX is a **four channel dmx** unit. The downlight and uplight are controlled **separately**. When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

| DMX Address | | | | |
|-------------|--------------------------------|------------------------------------|-----------------------------------|--------------------------------------|
| Fixture | Red Control (ex. X) Uplight | Green Control (ex. X+1) Uplight | Blue Control (ex. X+2) Uplight | White Control (ex. X+3) Downlight |
| #1 | 1 | 2 | 3 | 4 |
| #2 | 5 | 6 | 7 | 8 |
| #3 | 9 | 10 | 11 | 12 |

The fixture can be connected with RJ45 sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

| CONNECTION | RJ45 (CAT5e) |
|------------|-----------------------------------|
| Common | WHITE/BROWN(PIN7) & BROWN (PIN 8) |
| Signal - | ORANGE (PIN 2) |
| Signal + | WHITE/ORANGE (PIN 1) |
| Spare | - |
| Spare | - |

DMX IN DMX OUT



RJ45 Sockets


COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.


Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.

DIMENSIONS

SPV / DMX
with signal wire

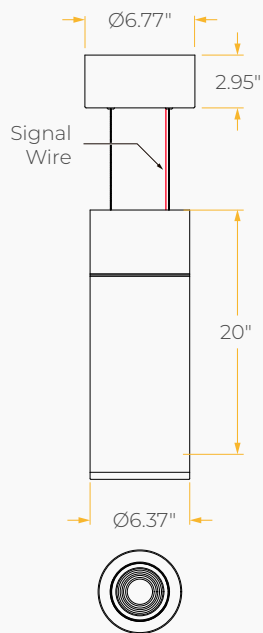


With Remote Power
(Remoted length can be 50ft max)



MOUNTING OPTIONS*

*Junction Box not included

Power Line Mount with
High Lumen Power Suspension

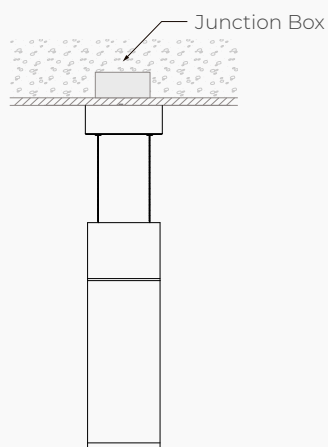

Power Line Mount with High Lumen
Power Suspension and Remote Power

