ZETA 10

AESTHETIC 10" CYLINDER WITH VARIOUS COLOR TRIM OPTIONS

Housing
Diameter : Ø9.4" | Height : 18.6" | Weight : 25 lbs

Material
Housing : High Pressure Die-Cast Aluminum, Tempered Glass
Reflector : Flow Forming Aluminum

Power Input
50W(White=25W, RGB=25W) | 120-277V
100W(White=50W, RGB=50W) | 120-277V

Lumen Output
3,260 lm (50W), 6,145 lm (100W)

Dimming
DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Color Quality
CRI 85

Rated Life
> 100,000 Hours (L70)

Finish
Black, White

Trim Finish
White, Sliver, Gold, Copper, Black

Color Temperature
3000K + Archi-Color® W+RGB

Optics
45°, 55°

Mounting
Stem Mount, Adjustable Cable, Wall Mount

Warranty
5 Year limited warranty

Listing

High Lumen Package & Personalization Options

An aesthetic 10-inch aperture cylinder with a sleek exterior and a low-profile design. Perfect fit for installations at 15 to 30 ft. mounting heights. With its five color trim options, you can effortlessly match the luminaire to your project and surroundings.

The Zeta 10 offers advanced glare control and delivers an impressive 6,145 lumens, making it a preferred choice for high-profile projects.

METEOR

ZETA 10

AESTHETIC 10" CYLINDER WITH
VARIOUS COLOR TRIM OPTIONS

METEOR

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

ZS10	MODEL	**ZETA 10**		
	WATTAGE	**50** 50W	**100** 100W	
308C	CCT / CRI	**308C** 3000K +RGB / CRI 85 Archi-Color® W+RGB		
UNV	VOLTAGE	**UNV** 120-277V		
	DIMMING	**DMX** DMX dims to 0.1% (XLR Sockets)	**DMXR** DMX dims to 0.1% (RJ45 Sockets)	**DMXP** DMX dims to 0.1% (Terminal Block)
	BEAM ANGLE	**45** 45°	**55** 55°	
	FINISH	**BLK** Black	**WHT** White	
	TRIM FINISH	**1** Copper Color Trim **4** White Color Trim	**2** Gold Color Trim **5** Black Color Trim	**3** Silver Color Trim
	MOUNTING	**ST2** Stem 2ft **SAD10** Sloped Adjustable Cable 10ft	**ST4** Stem 4ft **WLM**[1] Wall Mount	**AD10** Adjustable Cable 10ft
	ACCESSORIES	**SPD**[2] Surge Protector	**CT**[3] Conduit Mount	**FCS**[4] Field Cut Stem Adapter Kit

CLEAR FORM

[1] *Specifying wall mount with DMX does not feature XLR or RJ45 sockets; connections are hard-wired using three DMX wires*
[2] *Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machineries*
[3] *CT is not compatible with WLM*
[4] *FCS is not compatible with WLM*

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

REV 05072026

ZETA 10

AESTHETIC 10" CYLINDER WITH
VARIOUS COLOR TRIM OPTIONS

METEOR

TECHNICAL DETAILS

Electrical

- 3,260 lm (50W | White = 25W, RGB = 25W)
- 6,145 lm (100W | White = 50W, RGB = 50W)
- Power Input : 120-277V
- Operating Temperature : -13°F~112°F
- Surge Protection : Built-in is 4KV

LED Features

- Color Temperature : 3000K + Archi-Color® W+RGB
- CRI 85
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

Optics

- Precision molded high transmittance clear PC lens
- Beam Angle : 45°, 55°

Advanced Dimming

- Proprietary VX Driver™ is integrated across all dimming options, delivering video flicker-free performance and full compliance with IEEE 1789.
- DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Housing

- Diameter : Ø9.4"
- Height : 18.6"
- Weight : 25 lbs
- Material : High Pressure Die-Cast Aluminum, Tempered Glass

Mounting

- Stem Mount 2ft or 4ft (Swivel Canopy Included)
- Adjustable Cable 10ft
- Sloped Adjustable Cable 10ft
- Wall Mount

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE
- FCC

PERFORMANCE SUMMARY*

Delivered Lumens				
CCT/WATTAGE	R	G	B	W
50W	8W	8W	8W	25W
	150lm	990lm	120lm	2,000lm
100W	17W	17W	17W	50W
	220lm	1,700lm	210lm	4,015lm

**Beam Angle: 45° * Tolerance ±8%*

Current Consumption		
WATTAGE / VOLT	120V	277V
50W	0.44A	0.19A
100W	0.89A	0.38A

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

REV 05072026

PHOTOMETRICS

Below is a typical photometric representation of the ZETA 10 fixture. Please download IES files to ensure exact photometric value.



45°



55°

DMX REQUIREMENTS

The Zeta 10 Archi-Color® W+RGB fixture with DMX is a **four channel dmx** unit. When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

	DMX Address			
Fixture	**Red Control (ex. X)**	**Green Control (ex. X+1)**	**Blue Control (ex. X+2)**	**White Control (ex. X+3)**
#1	1	2	3	4
#2	5	6	7	8
#3	9	10	11	12

The fixture can be connected with RJ45 or XLR sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)	PIN 1
Signal -	ORANGE (PIN 2)	PIN 2
Signal +	WHITE/ORANGE (PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5



RJ45 Sockets



DMX IN DMX OUT

XLR Sockets

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.

TRIM FINISH

White Trim

Silver Trim

Gold Trim

Copper Trim

Black Trim

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

ZETA 10

AESTHETIC 10" CYLINDER WITH
VARIOUS COLOR TRIM OPTIONS

METEOR

DIMENSIONS

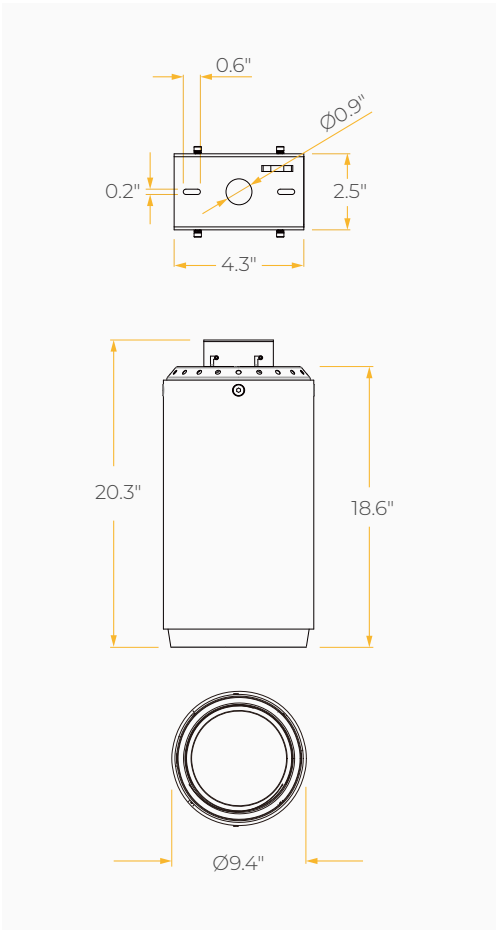

Conduit Mount

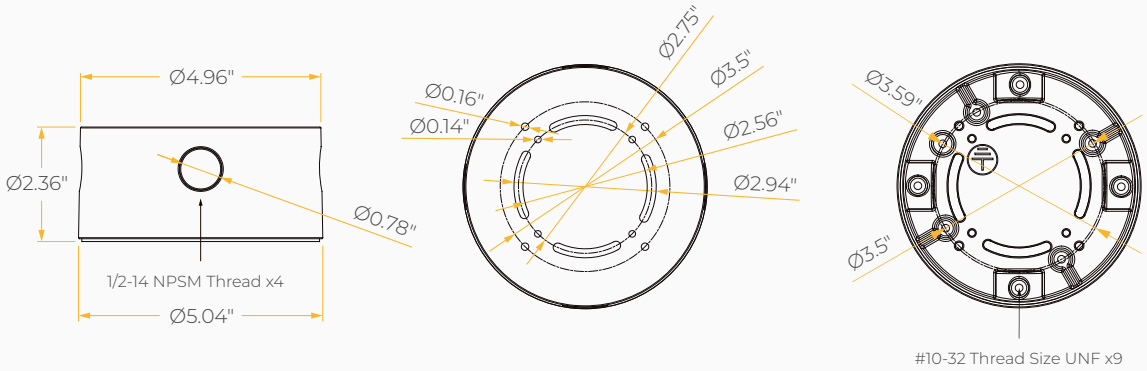

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

REV 05072026

MOUNTING OPTIONS

**Juntion Box not included*

Stem Mount

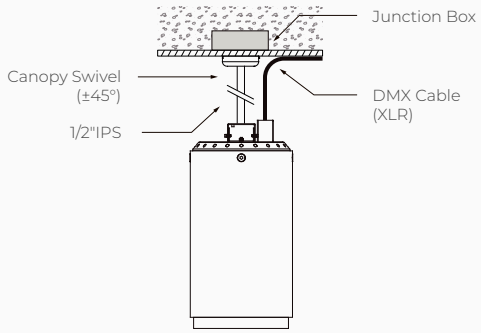

Adjustable Cable



Wall Mount



Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.