REV 6

QUIET CEILING DESIGN
HIGH LUMEN RECESSED DOWNLIGHT

SPECIFICATION SHEET
WARM DIM

Housing
Aperture : Ø7" | Oversize Trim : 8" | Ceiling Cutout : 6.7"
Maximum Ceiling Thickness : 2" | Height : 8"
Weight : 13.22 lbs (New Construction), 11.02 lbs (Retrofit)

Material
Housing : Extruded Aluminum
Reflector : Flow Forming Aluminum

Power Input
40W, 60W, 80W, 100W | 120V, 277V

Lumen Output
3,000 lm (40W), 4,350 lm (60W), 6,200 lm (80W), 7,600 lm (100W)

Dimming
Superior 0-10V : dims to 1%, dims to dark
DMX : High resolution dims to 0.1%

Color Quality	**Rated Life**
CRI 85+	> 100,000 Hours (L70)

Finish

Black White

Color Temperature

DTW

ColorFlip™ Warm Dim
1900K ↔ 3000K

Optics

40° 60° Wide

Warranty
5 Year limited warranty

Listing

Precision Engineered For High Performance.

6-inch aperture high lumen recessed downlight utilizing Meteor Lighting's proprietary ColorFlip™ Warm Dim solution, that results in superior efficacy and heat management.

This product is compatible with all existing 0-10V and DMX control systems. Bringing ambient lighting to your spaces.

METEOR

meteor-lighting.com

REV 6

QUIET CEILING DESIGN
HIGH LUMEN RECESSED DOWNLIGHT

METEOR

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

	MODEL	**RS6N** Rev 6 New Construction	**RS6R** Rev 6 Retrofit	
	WATTAGE	**40** 40W **100** 100W	**60** 60W	**80** 80W
WDIM	CCT / CRI	**WDIM** 1900K-3000K		
	VOLTAGE	**120** 120V	**277** 277V	
	DIMMING	**SPV** Superior 0-10V : dims to 1%, dims to dark	**DMX** DMX dims to 0.1% (XLR Sockets)	**DMXR** DMX dims to 0.1% (RJ45 Sockets)
	BEAM ANGLE	**40** 40°	**60** 60°	**WD**[1] Wide
	FINISH*	**BLK** Black	**WHT** White	**SSR**[2] Semi-Specular Reflector
	ACCESSORIES	**SPD**[3] Surge Protector **SCA610**[6] Sloped Ceiling Adapter 8°-12° **SCA625**[6] Sloped Ceiling Adapter 23°- 27°	**DF**[4] Diffuser **SCA615**[6] Sloped Ceiling Adapter 13°-17°	**GR8**[5] Goof Ring 8" to 10" **SCA620**[6] Sloped Ceiling Adapter 18°-22°

CLEAR FORM

[1] *WD option reduces delivered lumens by ~20%*
[2] *SSR is not compatible with WD, SCA610, SCA615, SCA620, SCA625*
[3] *Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machineries*
[4] *DF option reduces delivered lumens by ~12% (~20% with WD)*
[5] *GR8 Includes new reflector and is not compatible with RS6N*
[6] *SCA is not compatible with RS6R*
* *Finish indicates trim only, with standard matte silver reflector*

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

REV 10152026

TECHNICAL DETAILS

Electrical

- 3,000 lm (40W), 4,350 lm (60W), 6,200 lm (80W), 7,600 lm (100W)
- Power Input : 120V or 277V
- Operating Temperature : -20°F~112°F
- Surge Protection : Built-in is 4KV
- Power Factor Greater than 0.9

LED Features

- ColorFlip™ Warm Dim 1900K ↔ 3000K
- CRI 85+
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

Optics

- Flow Forming Aluminum Reflector
- Beam Angle : 40°, 60°, Wide (With diffuser)

Advanced Dimming

- Proprietary VX Driver™ is integrated across all dimming options, delivering video flicker-free performance and full compliance with IEEE 1789.
- Superior 0-10V : dims to 1%, dims to dark
- DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

New Construction Housing

- Aperture : Ø6.3" (New Construction), Ø7" (Retrofit)
- Height : 8"
- Weight : 13.22 lbs (New Construction), 11.02 lbs (Retrofit)
- Material : Extruded Aluminum (New Construction), High Pressure Aluminum (Retrofit)
- Non-IC Rated, insulation must be kept >1ft from housing
- Oversize Trim : 7.2" (New Construction), 8" (Retrofit)
- Ceiling Cutout : 6.7"
- Maximum Ceiling Thickness : 2"
- Tool-less top access allows service from above and below
- Light engine, optics, and driver(s) accessible from below ceiling
- Goof Ring 8" : Aluminum, standard white finish; O. D. 10"; other size and finish available, please inquire

*Note : C-Channel / Mounting Channels / T-Bar Hangers are purchased from a third party

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- FCC
- UKCA

PERFORMANCE SUMMARY*

Warm Dim	1900K ←					→ 3000K
DMX CCT Signal (%)	7%	20%	40%	60%	80%	100%
0-10V CCT Voltage	0.7	2	4	6	8	10
40W	60lm	270lm	810lm	1,530lm	2,310lm	3,000lm
60W	90lm	390lm	1,175lm	2,220lm	3,350lm	4,950lm
80W	125lm	560lm	1,675lm	3,160lm	4,775lm	6,200lm
100W	150lm	6,85lm	2,050lm	3,875lm	5,850lm	7,600lm

**Beam Angle: 40° * Tolerance ±8%*

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

PHOTOMETRICS

Below is a typical photometric representation of the Rev 6 fixture. Please download IES files to ensure exact photometric value.



40°



60°



WIDE

DMX REQUIREMENTS

The Rev 6 fixture with DMX is a **single channel dmx** unit that dims both intensity and color temperature between 1900K <-> 3000K. When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

The fixture can be connected with RJ45 or XLR sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)	PIN 1
Signal -	ORANGE (PIN 2)	PIN 2
Signal +	WHITE/ORANGE (PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5



RJ45 Sockets



DMX IN DMX OUT

XLR Sockets

COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

TRIM FINISH

Black Finish

White Finish

Semi-Specular Hyperbolic Trim

DIMENSIONS

New Construction

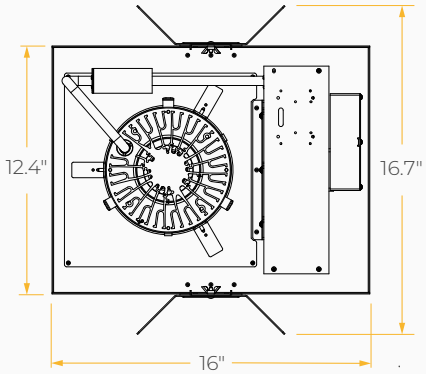

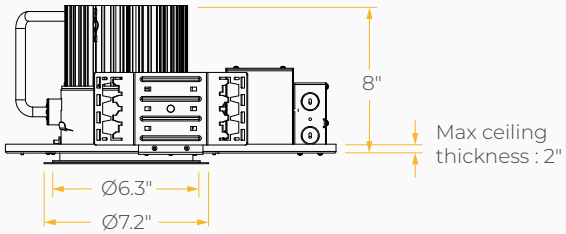

Retrofit

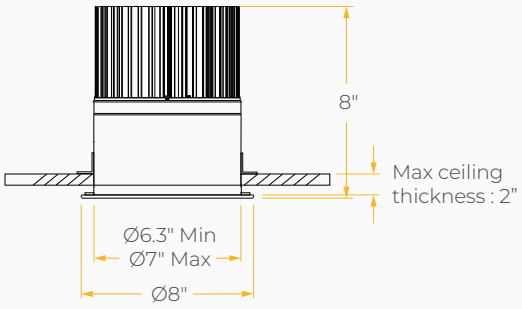

Sloped Ceiling Adapter

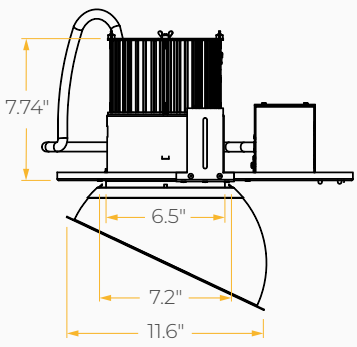

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

DIMENSIONS

Goof Ring 8"

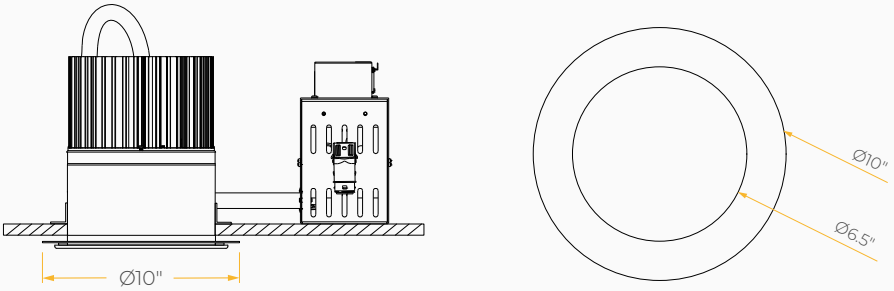

Powerbox Wiring Diagram

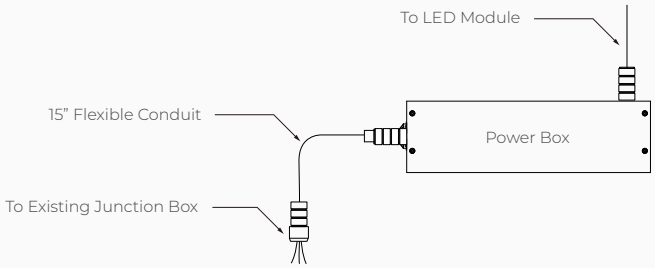

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.