

# DUO 6

SPECIFICATION SHEET  
STATIC WHITE

## ELEGANT 6 INCH UP AND DOWN LUMINAIRE

### Housing

Diameter : Ø6.37" | Height : 20" | Weight : 15.2 lbs

### Material

Housing : Extruded Aluminum

Lens : Clear polycarbonate

### Power Input

Downlight : 15W, 25W, 50W, 70W | 120-277V

Uplight : 15W, 25W | 120-277V

### Lumen Output

Downlight : 1,400 lm (15W), 2,335 lm (25W), 4,670 lm (50W), 6,470 lm (70W)

Uplight : 1,400 lm (15W), 2,335 lm (25W)

### Dimming

TRC : Linear line-voltage phase control, dims to 1%

LDE1 : Hi-Lume 1% EcoSystem LED Driver with Soft-on,

Superior 0-10V : Dims to 1%

DMX : High resolution dims to 0.1% (RJ45 only)

(Supports ANSI E1.20 RDM protocol)

### Color Quality

CRI 85, CRI 93 | UGR ≤ 19

### Rated Life

> 100,000 Hours (L70)

### Finish



Black



White

### Color Temperature



2700K



3000K



3500K



4000K

### Optics



40°  
UP/DOWN



60°  
UP/DOWN



WIDE  
UP/DOWN

### Mounting



Power Line



Power Line  
Remote Power

### Warranty

5 Year limited warranty

### Listing




## Revolutionary Mounting System

With a unique High Lumen Power Suspension System, the Duo series is an elegant, cable-free and aesthetic up and downlight solution.

With a seamless connector and hidden signal wire, this luminaire seamlessly blends into your environment and space.

Duo gives you perfect optics with intuitive design making it a decorative element that adds a touch of class.

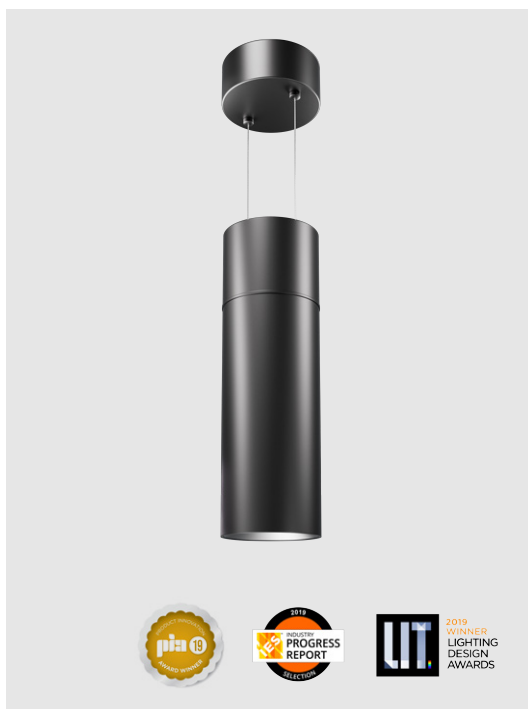

SPECIFICATION SHEET / STATIC WHITE

**DUO 6** ELEGANT 6 INCH  
UP AND DOWN LUMINAIRE



**SPECIFICATION**

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

<input type="text" value="DUO6"/>	MODEL	<b>DUO 6</b>		
<input type="text"/>	WATTAGE	<b>30</b> Downlight: 15W Uplight: 15W <b>95</b> Downlight: 70W Uplight: 25W	<b>50</b> Downlight: 25W Uplight: 25W	<b>75</b> Downlight: 50W Uplight: 25W
<input type="text"/>	CCT / CRI	<b>278</b> 2700K / CRI 85 <b>309</b> 3000K / CRI 93 <b>408</b> 4000K / CRI 85	<b>279</b> 2700K / CRI 93 <b>358</b> 3500K / CRI 85	<b>308</b> 3000K / CRI 85 <b>359</b> 3500K / CRI 93
<input type="text" value="UNV"/>	VOLTAGE	<b>UNV</b> 120 – 277V		
<input type="text"/>	DIMMING	<p><b>Without Signal Wire</b></p> <p><b>NOD</b> Non-Dimming</p> <p><b>TRC<sup>1</sup></b> Linear line-voltage phase control, dims to 1%</p> <p><b>LDE1<sup>2</sup></b> Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black (UNV only)</p> <hr/> <p><b>With Signal Wire</b></p> <p><b>SPVS</b> Superior 0-10V dims to 1% Single (Up/Down Together)</p> <p><b>SPVD</b> Superior 0-10V dims to 1% Dual (Up/Down Separately)</p> <p><b>DMXRS<sup>3</sup></b> DMX dims to 0.1% Single (Up/Down Together)</p> <p><b>DMXRD<sup>3</sup></b> DMX dims to 0.1% Dual (Up/Down Separately)</p>		
<input type="text"/>	BEAM ANGLE	<p><b>Downlight</b></p> <p><b>40</b> 40°</p> <p><b>60</b> 60°</p> <p><b>WD<sup>4</sup></b> Wide</p>		
<input type="text"/>		<p><b>Uplight</b></p> <p><b>40</b> 40°</p> <p><b>60</b> 60°</p> <p><b>WD<sup>4</sup></b> Wide</p>		
<input type="text"/>	FINISH	<b>BLK</b> Black	<b>WHT</b> White	
<input type="text"/>	MOUNTING	<b>PL#(2/4/6/8/10)<sup>5</sup></b> Power Line Mount (2, 4, 6, 8, and 10 ft.)	<b>PL#RM(2/4/6/8/10)<sup>5</sup></b> Power Line Mount with Remote Power (2, 4, 6, 8, and 10 ft.)	
<input type="text"/>	ACCESSORIES	<b>EMP</b> Remote Emergency Pack		

CLEAR FORM

<sup>1</sup> TRC is only compatible with 120V and not compatible with 50, 75, 95

<sup>2</sup> LDE1 is not compatible with 50, 75, 95

<sup>3</sup> DMXR connects with RJ45 Sockets

<sup>4</sup> WD option reduces delivered lumens by ~20%

<sup>5</sup> Replace “#” with the required length designation. ex: PL2, PL4

**TECHNICAL DETAILS****Electrical**

- Downlight : 1,400 lm (15W), 2,335 lm (25W), 4,670 lm (50W), 6,470 lm (70W)
- Uplight : 1,400 lm (15W), 2,335 lm (25W)
- Power Input : Universal (120-277V)
- Operating Temperature : -13°F~104°F
- Surge Protection : Built-in is 2.5KV
- Power Factor Greater than 0.9
- Remote Emergency Pack : Bodine BSL20B2UEK55C111

**LED Features**

- Color Temperature : 2700K, 3000K, 3500K, 4000K
- CRI 85, CRI 93
- UGR ≤ 19
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

**Optics**

- Precision molded high transmittance clear lenses
- Beam Angle: Up&Down : 40°, 60°, WD

**Advanced Dimming**

- Proprietary VX Driver™ is integrated across all dimming options, delivering video flicker-free performance and full compliance with IEEE 1789.

**Without Signal Wire**

- TRC : Linear line-voltage phase control, dims to 1%
- LDE1 : Hi-Lume 1% EcoSystem LED Driver with Soft-on, Superior 0-10V : Dims to 1%

**With Signal Wire**

- Superior 0-10V : dims to 1%  
Single Dimming (Controls Up/Down Together)  
Dual Dimming (Controls Up/Down Separately)
- DMX : High resolution dims to 0.1% (RJ45 only)  
(Supports ANSI E1.20 RDM protocol)  
Single Dimming (Controls Up/Down Together)  
Dual Dimming (Controls Up/Down Separately)

**Housing**

- Diameter : Ø6.37"
- Height : 20"
- Material : Extruded Aluminum
- Weight : 15.2 lbs
- Canopy Height : 2.95"

**Mounting**

- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft (Canopy Height : 2.95")
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft with Remote Power (Canopy Height : 0.84")

**Warranty**

- 5-year limited warranty

**Listing**

- ETL Listed

**PERFORMANCE SUMMARY\***




	Delivered Lumens			
CCT/WATTAGE	2700K	3000K	3500K	4000K
<b>30W</b> UP (15W)	1,240lm	1,345lm	1,380lm	1,400lm
<b>30W</b> DOWN (15W)	1,240lm	1,345lm	1,380lm	1,400lm
<b>50W</b> UP (25W)	2,070lm	2,245lm	2,305lm	2,335lm
<b>50W</b> DOWN (25W)	2,070lm	2,245lm	2,305lm	2,335lm
<b>75W</b> UP (25W)	2,070lm	2,245lm	2,305lm	2,335lm
<b>75W</b> DOWN (50W)	4,145lm	4,495lm	4,610lm	4,670lm
<b>95W</b> UP (25W)	2,070lm	2,245lm	2,305lm	2,335lm
<b>95W</b> DOWN (70W)	5,745lm	6,230lm	6,390lm	6,475lm

	Current Consumption	
WATTAGE / VOLT	120V	277V
<b>30W</b>	0.28A	0.12A
<b>50W</b>	0.46A	0.20A
<b>75W</b>	0.69A	0.30A
<b>95W</b>	0.87A	0.38A

\* Tolerance ±8%  
 \* For specifications requiring a CRI of 93, apply a 0.75 multiplier to the lumen output values listed.

**PHOTOMETRICS**

Below is a typical photometric representation of the Duo 6 fixture. Please download IES files to ensure exact photometric value.



**DMX REQUIREMENTS**


The Duo 6 fixture with DMX unit has **two channels** per fixture (1 to control uplight, 1 to control downlight). When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

	DMX Address	
Fixture	Uplight (ex. X)	Downlight (ex. X+1)
<b>#1</b>	1	2
<b>#2</b>	3	4
<b>#3</b>	5	6

## DMX REQUIREMENTS

The fixture can be connected with RJ45 sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

CONNECTION	RJ45 (CAT5e)
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)
Signal -	ORANGE (PIN 2)
Signal +	WHITE/ORANGE (PIN 1)
Spare	-
Spare	-



## COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.





## COMPATIBLE TRC DIMMER LIST

PART NO.					
Lutron S-603PG	Lutron DVCL-153P	Lutron DVLV-600P	Lutron TGCL-153P	Lutron S-600P	Lutron DVELV-303P
Lutron SELV-300P	Lutron TG-600P	Lutron DVLV-600P	Lutron LG-600P	Lutron CT-103P	Lutron MAELV-600
Lutron FAELV-500	Leviton IPI06-1LZ	Leviton 6631-2	Leviton VPE06	Leviton 6683-IW	Leviton 6161
Leviton 6633-P	Leviton IPE04	Cooper DLC03P	Cooper SLC03P	Cooper DAL06P	Lightolier ZP260QEW

## COMPATIBLE LDE1 DIMMER LIST

LUTRON PART NO.						
RMJ-ECO32-DV-B	FCJ/FCJS-ECO	QSN-1ECO-S	QSN-2ECO-S	QSGRJ-_E	QSGR-_E	QP2-__2C
QP2-__4C	QP2-__6C	QP2-__8C	LQSE-2ECO-D			


**DIMENSIONS**

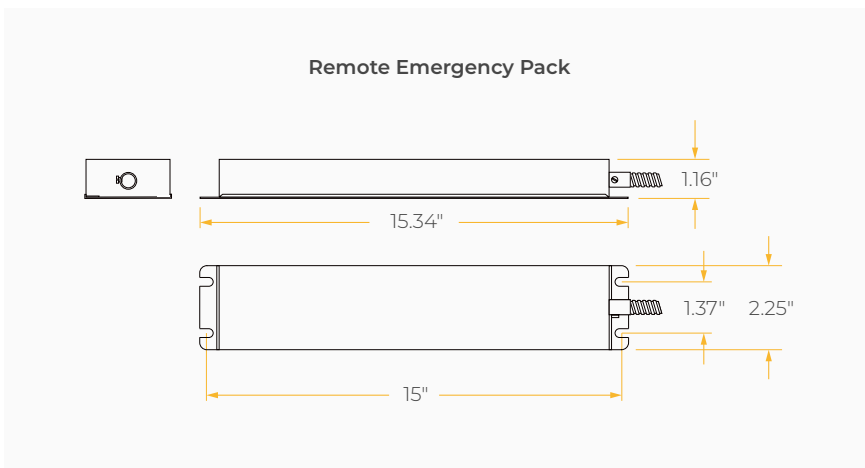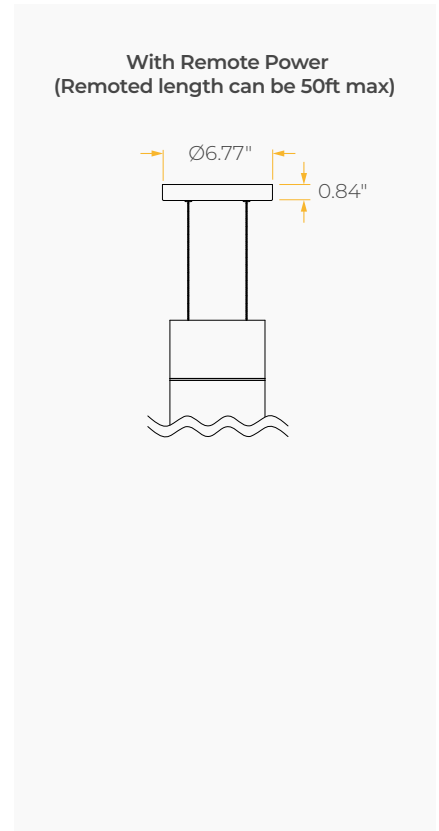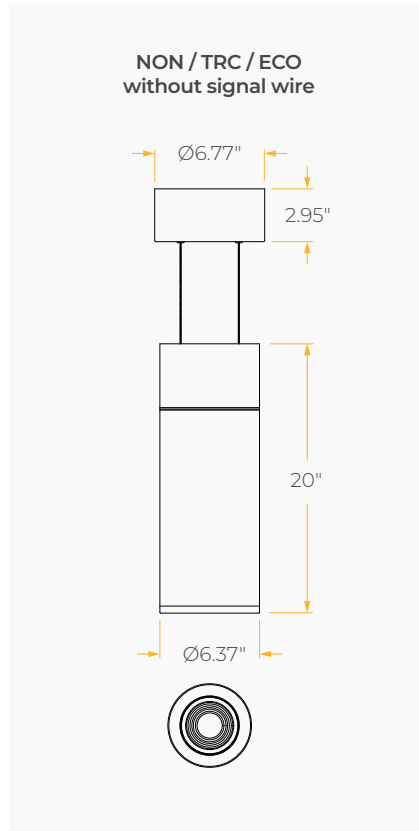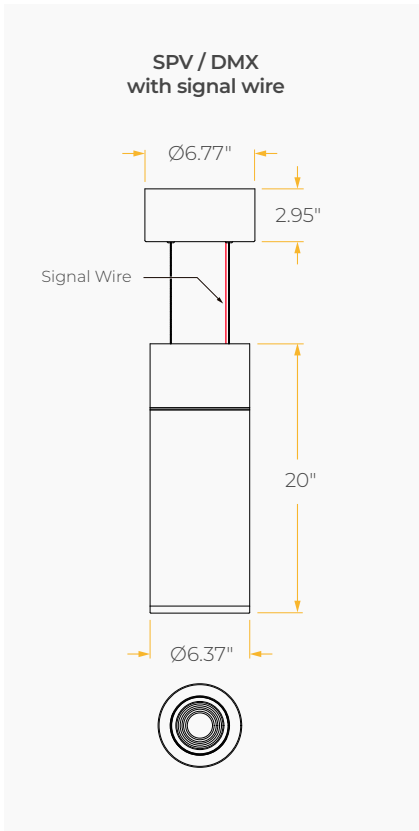

**MOUNTING OPTIONS\***

\*Junction Box not included

**Power Line Mount with  
High Lumen Power Suspension**

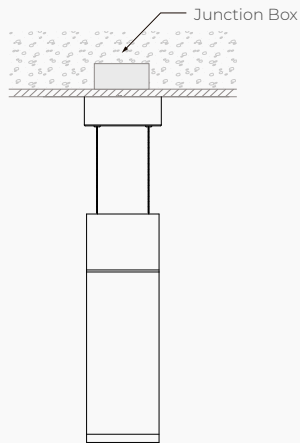

**Power Line Mount with High Lumen  
Power Suspension and Remote Power**

