

ATRIA II 8

REIMAGINING PERFORMANCE SPACES

SPECIFICATION SHEET
ARCHI-COLOR® PRO

Housing

Diameter : Ø8.1" | Height : 21.5" | Weight : 20 lbs

Material

Housing : High Pressure Die-Cast Aluminum

Optics : Metal Reflector

Power Input

150W | 120-277V

Lumen Output

9,650 lm (150W)

Dimming

DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Color Quality

CRI 85

Rated Life

> 100,000 Hours (L70)

Finish



Matte Black



Matte White

Color Temperature



Archi-Color® Pro
RGBW (3000K)

Optics



60°



Wide

Mounting



Stem
Mount



Adjustable
Cable



Yoke
Mount



Wall
Mount



Surface
Mount

Warranty

5 Year limited warranty


Listing



Architecture + Color Combined

Atria II Series is Meteor's flagship architectural cylinder—an expression where form, material, and detail are reduced to their essential. Designed for seamless integration, Atria II remains visually quiet, revealing only an elegant ring of light while delivering precise illumination for theatrical venues, auditoriums, and other performance spaces.

Integrated with Archi-Color® Pro, it enables full-output color mixing through dynamic power allocation, allowing each channel to reach 100% output without shared limitations.



METEOR

meteor-lighting.com

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

Use our online product configurator to quickly assemble fixture specifications

ASII8	MODEL	ATRIA II 8		
150	WATTAGE	150 150W		
308P	CCT / CRI	308P Archi-Color® Pro RGBW (3000K)		
UNV	VOLTAGE	UNV 120 – 277V		
	DIMMING	DMX DMX dims to 0.1% (XLR Sockets) DMXW DMX dims to 0.1% (Hard-wired)	DMXR DMX dims to 0.1% (RJ45 Sockets)	DMXP DMX dims to 0.1% (Terminal Block)
	BEAM ANGLE	60 60°	WD ¹ Wide	
	FINISH	BLK SilentBlack™, Matte Finish	WHT SilentWhite™, Matte Finish	
	RIM FINISH	STD Standard	GLR Glow Ring	
	MOUNTING	ST2 Stem 2ft SAD10 Sloped Adjustable Cable 10ft SUM Surface Mount	ST4 Stem 4ft YKM Yoke Mount	AD10 Adjustable Cable 10ft WLM ² Wall Mount
	ACCESSORIES	SPD ³ Surge Protector FCS ⁶ Field Cut Stem Adapter Kit	HC ⁴ Hex Cell Louver	CT ⁵ Conduit Mount

[↻ CLEAR FORM](#)¹ WD option reduces delivered lumens by ~20%² WLM is not compatible with DMX, DMXR, DMXP; connections are hard-wired using three DMX wires³ Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machineries⁴ HC option reduces delivered lumens by ~30%⁵ CT is not compatible with SUM, YKM, WLM⁶ FCS is not compatible with SUM, AD10, SAD10, YKM, WLM

TECHNICAL DETAILS

Electrical

- 9,650 lm (150W)
- Power Input : Universal (120-277V)
- Operating Temperature : -13°F~112°F
- Surge Protection : Built-in is 4KV
- Power Factor Greater than 0.9

LED Features

- Color Temperature : Archi-Color® Pro - RGBW (3000K)
- **Archi-Color® Pro** is Meteor's latest intelligent color-changing technology, dynamically allocating available system power across channels. This architecture allows each individual channel to reach 100% output, while multi-channel mixing can operate without fixed limits or shared restrictions. Learn more at: www.meteor-lighting.com/technology/archi-color
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs
- Lumen Maintenance > 0.90 at 60,000 hours

Optics

- Aluminum Reflector
- Beam Angle : 60°, WD

Advanced Dimming

- Proprietary VX Driver™ is integrated across all dimming options, delivering video flicker-free performance and full compliance with IEEE 1789.
- DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Housing

- Diameter : Ø8.1"
- Height : 21.5"
- Material : High Pressure Aluminum, Metal Reflector
- Weight : 20 lbs

Mounting

- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Adjustable Cable 10ft
- Sloped Adjustable Cable 10ft
- Surface Mount
- Yoke Mount
- Wall Mount

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE
- UKCA
- FCC

PERFORMANCE SUMMARY*

Lumen Performance				
Channel	R Full On	G Full On	B Full On	W Full On
Fixture Wattage	150W	150W	150W	150W
Deliver Lumen	5,037lm	9,600lm	1,764lm	9,650lm

*Beam Angle: 60° *Tolerance ±8%

Current Consumption		
Fixture Wattage	Voltage	
	120V	277V
150W	1.37A	0.59A

PHOTOMETRICS

Below is a typical photometric representation of the Atria 8 fixture. Please download IES files to ensure exact photometric value.



60°

Wide

DMX REQUIREMENTS


The Atria II 8 Archi-Color® Pro fixture with DMX is a **four channel dmx** unit. When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

Channel Fixture	DMX Address			
	Red Control (ex. X)	Green Control (ex. X+1)	Blue Control (ex. X+2)	White Control (ex. X+3)
#1	1	2	3	4
#2	5	6	7	8
#3	9	10	11	12


*The White Control channel adjusts the brightness of 3000K LEDs.

The fixture can be connected with XLR, RJ45 sockets or Phoenix Connector. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)	PIN 1
Signal -	ORANGE (PIN 2)	PIN 2
Signal +	WHITE/ORANGE (PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5




RJ45 Sockets



DMX IN DMX OUT

XLR Sockets



Phoenix Connector

COLOR TEMPERATURE REFERENCE CHART

Color Temperature Table*				
Channel	1	2	3	4
COLOR/CCT	Red (R)	Green (G)	Blue (B)	White (W)
1900K	255	53	0	98
2700K	51	19	0	156
3000K	0	0	0	255
3500K	0	7	1	255
4000K	0	17	8	237
5000K	0	30	19	228
6500K	0	47	34	206

* Recommended RGBW values for approximating the listed CCTs. Actual results may vary by fixture and application.
The White channel adjusts the output of the 3000K white LEDs, unless otherwise specified.

COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.

RIM FINISH





Standard Trim




Glowing Ring

DIMENSIONS

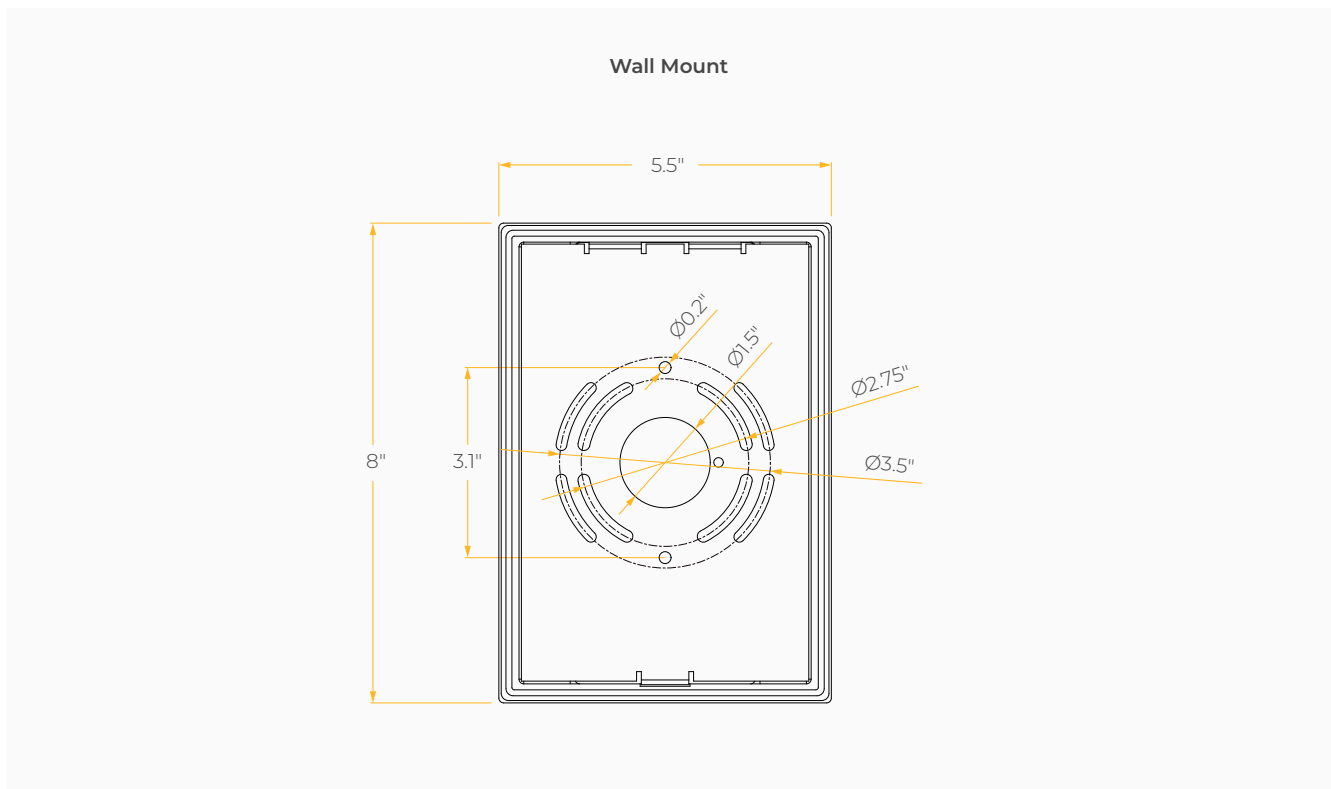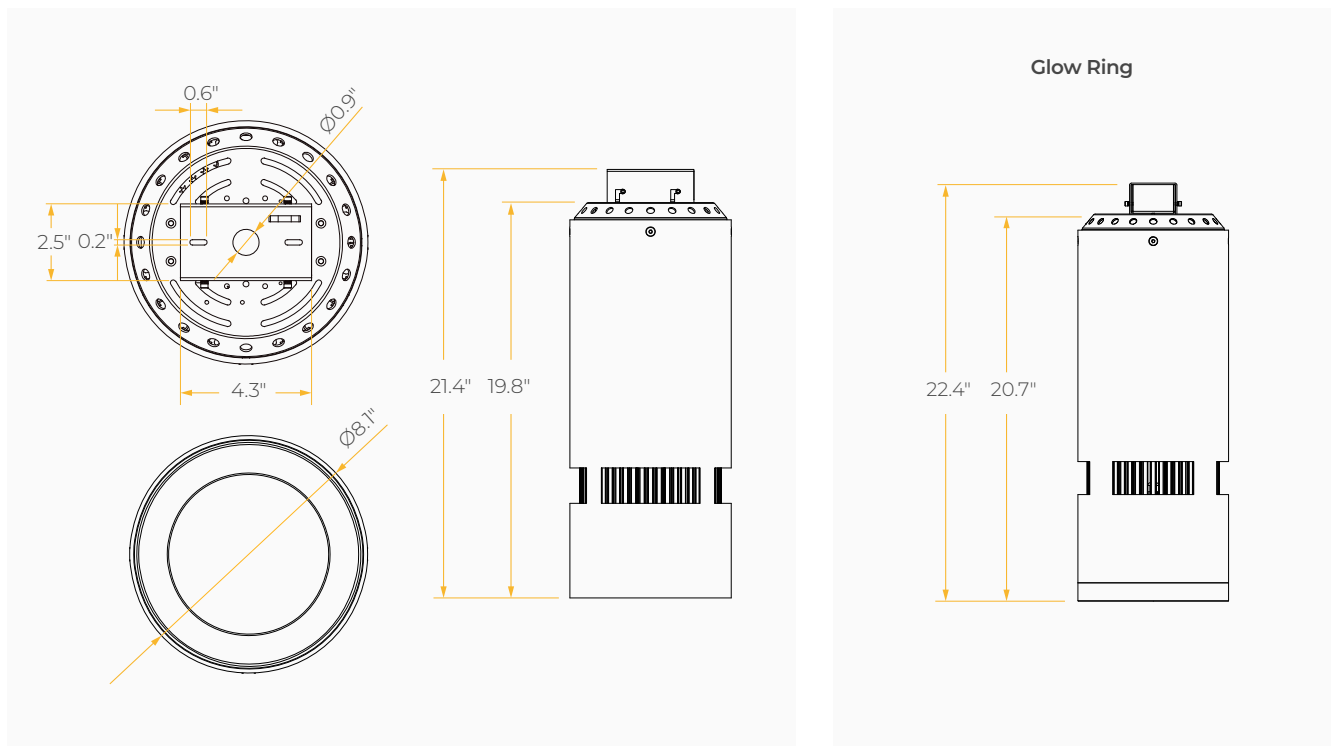

DIMENSIONS*


Conduit Mount

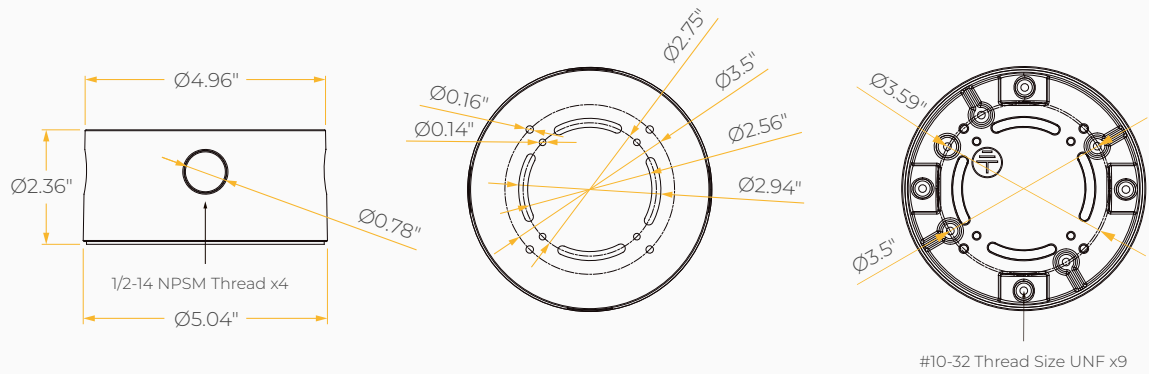


MOUNTING OPTIONS*

*Junction box not included


Stem Mount

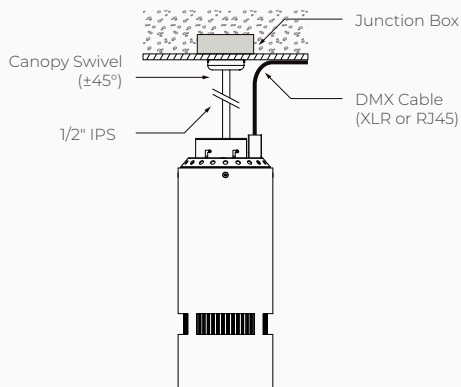


Sloped Adjustable Cable /
Adjustable Cable

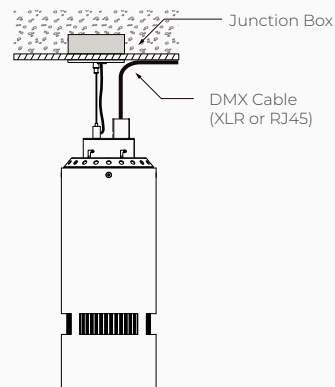

Wall Mount

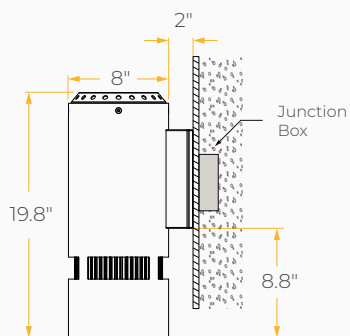

Yoke Mount

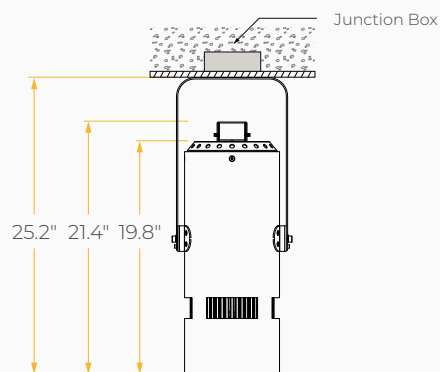

Surface Mount

