

ADVANCED HIGH CEILING

DOT 3.5 - Standard



New Dot 3.5 aperture micro cylinders with up to 2000 lumen output package. Available in Black, White and Silver finishes and a variety of mounting options.

Quantity		Type	
Project		Note	

Electrical System

- 800 lm (10W)
- 1200 lm (15W)
- 2000 lm (25W)
- Power Input: Universal (120-277V)
- Operating Temperature: +14°F~95°F
- Surge Protection: 2.5KV

LED Technology

- 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 15°, 25°, 40°, 50°
- Rated Life > 60,000 Hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1%(120V only)

Housing

- Diameter: 3.5" (90mm)
- Height: 9.5" (242mm)
- Material: Aluminum
- Weight: 2.9 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft
- Wall Mount

Warranty

- 5 year limited warranty

Listing

- ETL Damp Location Listed
- CE



DOT 3.5 - Standard








How To Specify:

Ordering Example: DT3-25-408-UNV-STV-15-BLK-BLK-SUM

4-5 weeks lead time on over 75% of specifications.

Model	Wattage		CCT / CRI		Voltage		Dimming	
DT3					UNV			
DT3	10	10W	308	3000K / CRI85	UNV	120-277V	STV	Standard 0-10V dims to 10%
DOT 3.5"	15	15W	358	3500K / CRI85			SPV	Superior 0-10V dims to dark
	25	25W	408	4000K / CRI85			TRC	TRIAC dims to 1% (120V ONLY)
			309	3000K / CRI95				
			359	3500K / CRI95				
			409	4000K / CRI95				

Beam Angle		Finish		Trim Finish		Mounting		Accessories	
15	15°	BLK	Black	BLK	Black	SUM	Surface Mount	HC¹	Honey Comb
25	25°	WHT	White	WHT	White	ST2	Stem 2ft	SL²	Solite Lens
40	40°	SLV	Silver	SLV	Silver	ST4	Stem 4ft		
55	55°			GLD	Gold	PL2¹	Power Line Mount 2ft		
				BL	Blue	PL4¹	Power Line Mount 4ft		
					Black	PL6¹	Power Line Mount 6ft		
					White	PL8¹	Power Line Mount 8ft		
					Silver	PL10¹	Power Line Mount 10ft		
					Gold	CM10	Cord Mount 10ft		
					Blue	WLM	Wall Mount		
						SUM	Surface Mount		

¹Option only available with Remote Power

¹Please factor in change in lumen output of -30%

²Please factor in change in lumen output of -15%.

Delivered Lumens*


Wattage	10W	15W	25W
Beam Angle: 15°			
4000K	800 lm	1200 lm	2000 lm
3500K	775 lm	1160 lm	1940 lm
3000K	750 lm	1125 lm	1880 lm

*Tolerance ± 8%


Current Consumption

Volt	120V	277V
10W	0.09A	0.04A
15W	0.14A	0.06A
25W	0.24A	0.11A

Dimensions



Mounting Options

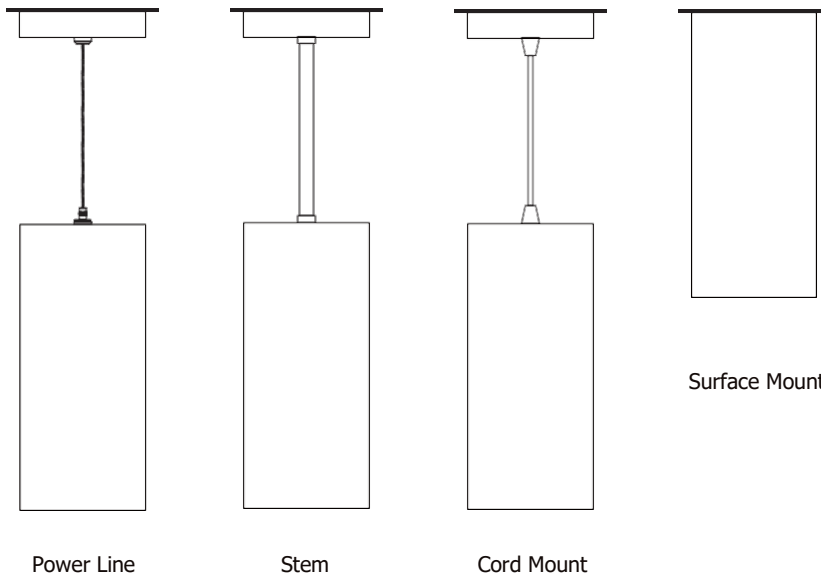


Power Line

Stem

Cord Mount

Surface Mount

Remote Power

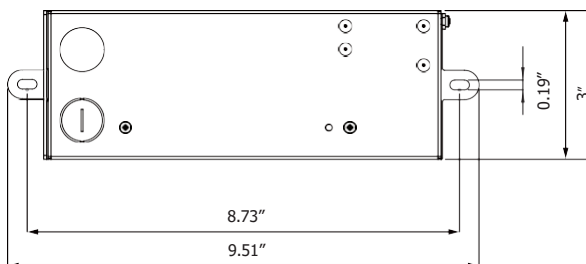

ADVANCED HIGH CEILING

DOT 3.5 - Warm Dim



New Dot 3.5 aperture micro cylinders with up to 1760 lumen output package. Smooth Dim to Dark compatibility with Ward Dim Color Tuning.

Quantity		Type	
Project		Note	

Delivered

Warm Dim	1900K		2700K			
0-10V CCT Voltage	0.7	2	4	6	8	10
15W	50 lm	180 lm	355 lm	560 lm	765 lm	1020 lm
25W	100 lm	255 lm	775 lm	980 lm	1345 lm	1760 lm

*Tolerance±8%

Electrical System

- 1020 lm (15W)
- 1760 lm (25W)
- Power Input: Universal (120-277V)
- Operating Temperature: 14°F~95°F
- Surge Protection: 2.5KV

LED Technology

- Warm Dim™ (Tuning White: 1900K ↔ 2700K)

- 93 CRI
Beam Angle: 15°, 25°, 40°, 55°

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

Housing

- Diameter: 3.5" (90mm)
- Height: 9.5" (242mm)
- Material: Aluminum
- Weight: 2.9 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft

Warranty

- 5 year limited warranty

Listing

- ETL Damp Location Listed
- CE



DOT 3.5 - Warm Dim








How To Specify:


Ordering Example: DT3-25-WDIM-UNV-STV-15-BLK-BLK-SUM

4-5 weeks lead time on over 75% of specifications.

Model	Wattage	CCT / CRI	Voltage	Dimming
DT3		WDIM	UNV	
DT 3	15 15W	WDIM 1900K - 2700K	UNV 120-277V	STV Standard 0-10V dims to 10%
DOT 3.5"	25 25W			SPV Superior 0-10V dims to dark
				TRC TRIAC dims to 1% (120V ONLY)

Beam Angle	Finish	Trim Finish	Mounting	Accessories
15 15°	BLK Black	BLK Black	SUM Surface Mount	HC¹ Honey Comb
25 25°	WHT White	WHT White	ST2 Stem 2ft	SL² Solite Lens
40 40°	SLV Silver	SLV Silver	ST4 Stem 4ft	
55 55°		GLD Gold	PL2¹ Power Line Mount 2ft	¹ Please factor in change in lumen output of -30%
		BL Blue	PL4¹ Power Line Mount 4ft	² Please factor in change in lumen output of -15%.
		 Black	PL6¹ Power Line Mount 6ft	
		 WHT	PL8¹ Power Line Mount 8ft	
		 SLV	PL10¹ Power Line Mount 10ft	
		 GLD	CM10 Cord Mount 10ft	
		 Blue	WLM Wall Mount	
			¹ Option only available with Remote Power	


Dimensions



Current Consumption

Wattage	Volt	
	120V	277V
15W	0.14A	0.06A
25W	0.24A	0.11A

Mounting Options

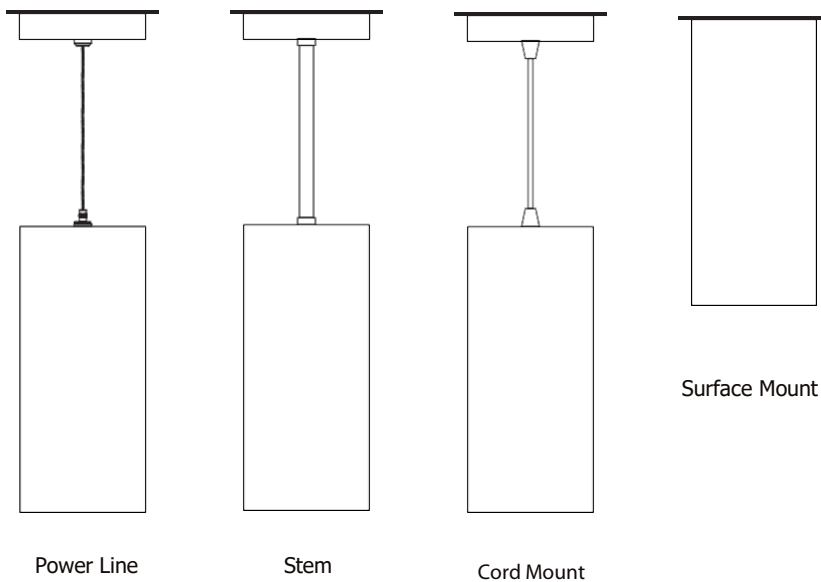

Remote Power

