REV HYDRO 4

SPECIFICATION SHEET
STATIC WHITE OUTDOOR
CYLINDER CONVERSION KIT

HIGH LUMEN RECESSED DOWNLIGHT WITH WATERPROOF DESIGN

Housing
Aperture : Ø4.7"
Height : 13.2" | Weight : 7 lbs

Material
Housing : Die Cast Aluminum
Lens : PC
Trim: Flow Forming Aluminum

Power Input
30W, 40W | 120V, 277V

Lumen Output
2,650 lm (30W), 3,320 lm (40W)

Dimming
Standard 0-10V : Dims to 10%
DALI : Dims to 10%

Color Quality
CRI 85

Rated Life
> 60,000 Hours (L70)

Trim Finish

Black | Gray | Bronze

Color Temperature

2700K | 3000K | 3500K | 4000K

Optics

30° | 45° | 55°

Warranty
5 Year limited warranty

Listing

Intertek | FC | UK CA | IP65

Durable Design, Compact Brilliance.

The REV Hydro, now specified in a cylinder form factor, seamlessly integrates an IP65-rated driver within its cylindrical body to preserve waterproof integrity. This configuration offers versatile mounting options, including a stem or adjustable cable, allowing for flexibility in design while maintaining the fixture's performance and timeless aesthetic.



METEOR

meteor-lighting.com

REV HYDRO 4

HIGH LUMEN RECESSED DOWNLIGHT
WITH WATERPROOF DESIGN

METEOR

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

RH4C	MODEL	**REV HYDRO 4 CYLINDER**		
	WATTAGE	**30** 30W	**40** 40W	
	CCT / CRI	**278** 2700K / CRI 85 **408** 4000K / CRI 85	**308** 3000K / CRI 85	**358** 3500K / CRI 85
	VOLTAGE	**120** 120V	**277** 277V	
	DIMMING	**STV** Standard 0-10V dims to 10%	**DALI** DALI dims to 10%	
	BEAM ANGLE	**30** 30°	**45** 45°	**55** 55°
	HOUSING FINISH	**BLK** Black	**GRY**[1] Gray	**BRZ**[1] Bronze
	MOUNTING	**SUM** Surface Mount **AD10** Adjustable Cable 10ft	**ST2** Stem 2ft **SAD10** Sloped Adjustable Cable 10ft	**ST4** Stem 4ft
	RATING	**OUT**[2] Outdoor Rating	**NAT**[3] Natatorium Rating	**MAR**[4] Marine Rating

CLEAR FORM

[1] *Long lead time required*
[2] *Outdoor Rating: Coating and wiring will be changed to high UV resistant and corrosion resistant materials for long-term operation in outdoor environments*
[3] *Natatorium Rating: Utilizes high corrosion-resistant materials for both coatings and sealants to prevent damage from long-term exposure to chlorine vapors*
[4] *Marine Rating: Utilizes high corrosion-resistant materials for both coatings and sealants to prevent damage from long-term exposure to saltwater environments*

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

REV 10272026

REV HYDRO 4

HIGH LUMEN RECESSED DOWNLIGHT
WITH WATERPROOF DESIGN

METEOR

TECHNICAL DETAILS

Electrical

- 2,650 lm (30W), 3,320 lm (40W)
- Power Input : 120V or 277V
- Operating Temperature -40°F~104°F
- Surge Protection : Built-in is 4KV
- Power Factor Greater than 0.9

LED Features

- Color Temperature : 2700K, 3000K, 3500K, 4000K
- CRI 85
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 60,000 Hrs

Optics

- PC Lens
- Beam Angle : 30°, 45°, 55°

Advanced Dimming

- Standard 0-10V : Dims to 10%
- DALI : Dims to 10%

Housing

- Aperture : Ø4.7"
- Height : 13.2"
- Weight : 7 lbs
- Material : Die Cast Aluminum, PC, Flow Forming Aluminum

Mounting

- Surface Mount
- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Adjustable Cable 10ft
- Sloped Adjustable Aircraft Cable 10ft

Warranty

- 5-year limited warranty

Listing

- ETL Wet Location Listed
- FCC
- IP 65

PERFORMANCE SUMMARY*

Delivered Lumens				
CCT/ WATTAGE	2700K	3000K	3500K	4000K
30W	2,400lm	2,500lm	2,600lm	2,650lm
40W	3,020lm	3,150lm	3,250lm	3,320lm

Current Consumption		
WATTAGE / VOLT	120V	277V
30W	0.28A	0.12A
40W	0.36A	0.15A

** Tolerance ±8%*

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

REV 10272026

REV HYDRO 4

HIGH LUMEN RECESSED DOWNLIGHT
WITH WATERPROOF DESIGN

CYLINDER CONVERSION KIT FINISH

Black Finish

Gray Finish

Bronze Finish

DIMENSIONS

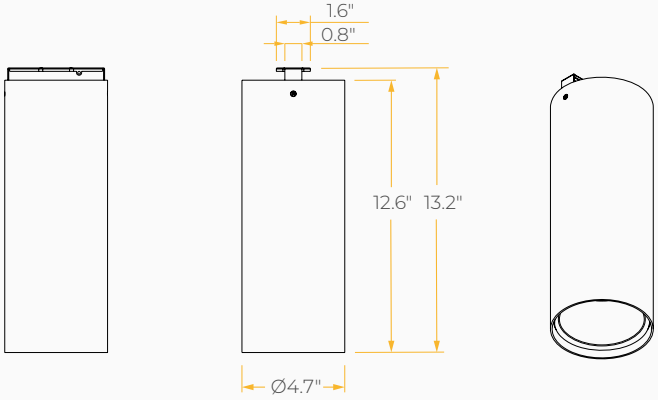

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.

REV 10272026

MOUNTING OPTIONS*

**Junction box not included*

Stem Mount

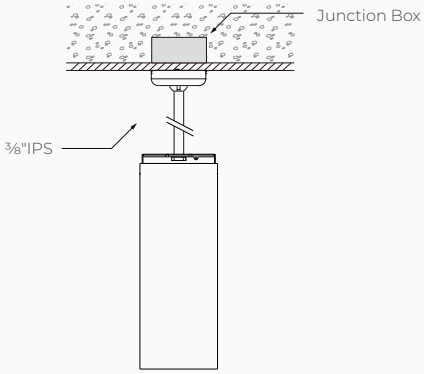

Adjustable Cable

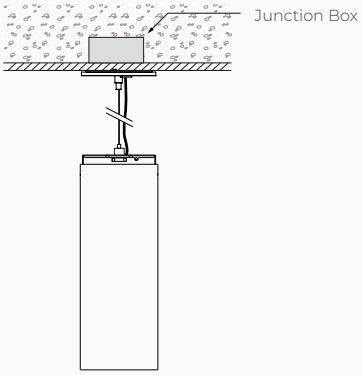

Surface Mount

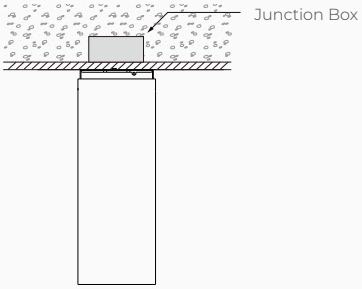

Meteor Lighting reserves the right to make changes to this product for design and development improvements at any time without prior notice, and such modification shall be effective immediately. ©Meteor Illumination Technologies, Inc.