

Bolt - Standard

High lumen compact modular luminaire with lumen output 13608 – 68340lm suited for sporting facilities.

Project		Type	
		Note	

Electrical System

- 16500 lm (150W)
- 29700 lm (220W)
- 36400 lm (280W)
- 53000 lm (440W)
- 68340 lm (560W)
- Power Input: Universal (120-277V); HVT (347-480V)
- Operating Temperature: -40°F~104°F
- Surge Protection: 10KV

LED Technology

- 3000K, 4000K, 5000K
- 85 CRI, 75 CRI
- Beam Angle: 15°, 30°, 60°, 80° and 100° (with diffuser)
- Rated Life > 60,000 Hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%

Housing

- Dimensions:
 - 150W: 8.60" (218mm) x 17.68" (449mm) x 9.27" (235mm)
 - 220W/280W: 7.87" (200mm) x 17.68" (449mm) x 11.68" (297mm)
 - 440W/560W: 11.68" (297mm) x 19.35" (491mm) x 16.5" (419mm)
- Material: Die-Cast Aluminum, Tempered Glass
- Weight: 14.77lbs (BTS-150) / 24.25lbs (BTS-220) / 24.25lbs (BTS-280) / 48.5lbs (BTS-440/560)

Mounting

- Bracket

Warranty

- 5-year limited warranty

Listing

- UL Damp Location Listed
- DLC Listed
- FCC
- CE



Not all Bolt Series are DLC qualified.
For all qualified products.
Please visit: www.designlights.org/qpl

Bolt - Standard**How to Specify:****Ordering Example: BTS-560-507-UNV-STV-15-BLK-BRK-WG****4-5 weeks lead time on over 75% of specifications.**

Model	Wattage	CCT / CRI	Voltage	Dimming
BTS			UNV	
BTS	150 150W	308 3000K / CRI85	UNV 120-277V	STV Standard 0-10V dims to 10%
Bolt Series	220 220W	408 4000K / CRI85	HVT 348-480V	
	280 280W	507 5000K / CRI75		
	440 440W			
	560 560W			

Beam Angle	Finish	Mounting	Accessories
15 15° 30 30° 60 60° 80 80° WD* 100° (with diffuser) *Please factor in change in lumen output with diffuser (-20% with WD; -12% with other degrees).	BLK Black WHT White	BRK Bracket	WG ¹ Wire Guard GSB ² Glare Shield Baffle GSV ³ Glare Shield Visor DF ⁴ Diffuser SLP Slipfitter (Black only) ¹ Please factor in change in lumen output of -14%. ² Please factor in change in lumen output of -40%. ³ Please factor in change in lumen output of -25%. ⁴ Please factor in change in lumen output with diffuser (-20% with WD; -12% with other degrees).

DesignLights Consortium™ Qualified Luminaires:

DLC QPL Model Number: BTS-560-50K, BTS-150-CCT-UNV, BTS-220-CCT-UNV, BTS-280-CCT-UNV

Not all product variations listed on this page are DLC qualified.

To ensure that a specific model is qualified, visit www.designlights.org/search.

Bolt - Standard**Delivered Lumens***










Wattage \ CCT	150W	220W	280W	440W	560W
	Beam Angle: 15°				
5000K	16500 lm	29700 lm	36400 lm	53000 lm	68340 lm
4000K	14850 lm	26730 lm	32760 lm	47700 lm	61500 lm
3000K	14025 lm	25245 lm	30940 lm	45050 lm	58090 lm

* Tolerance $\pm 8\%$ **Current Consumption**

Wattage \ Volt	120V	277V
150W	1.38A	0.60A
220W	2.02A	0.87A
280W	2.57A	1.11A
440W	4.03A	1.75A
560W	5.13A	2.22A

Dimensions










150W

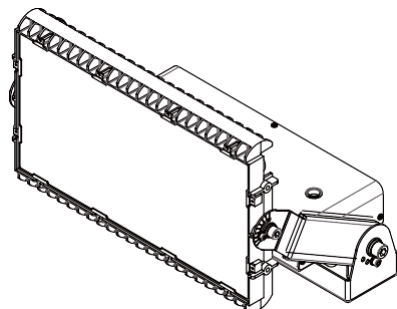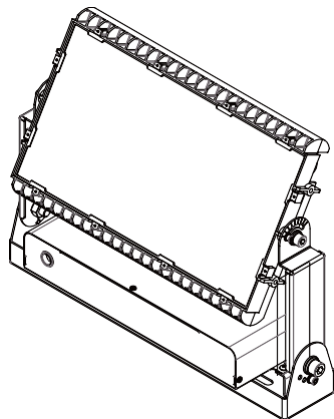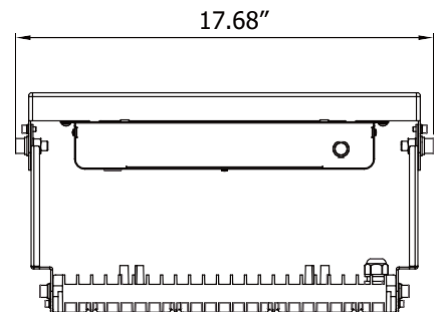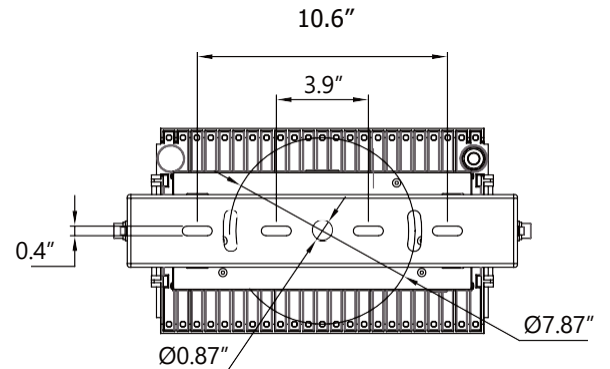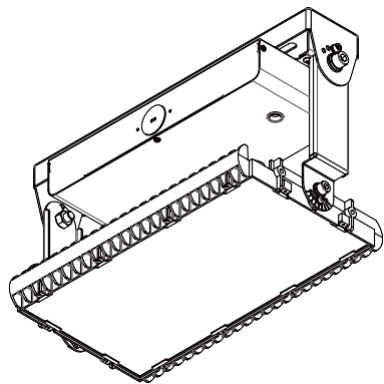

Bolt - Standard


Dimensions

220W / 280W

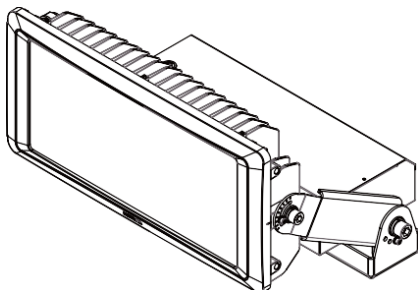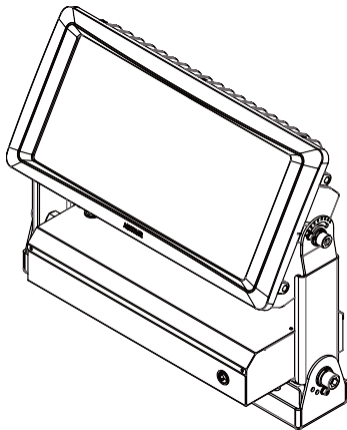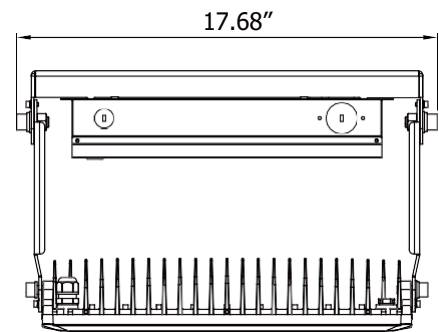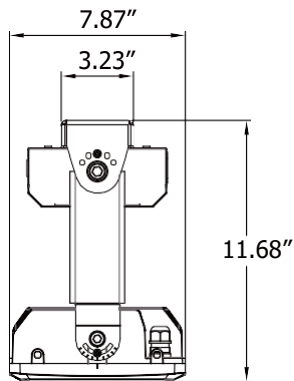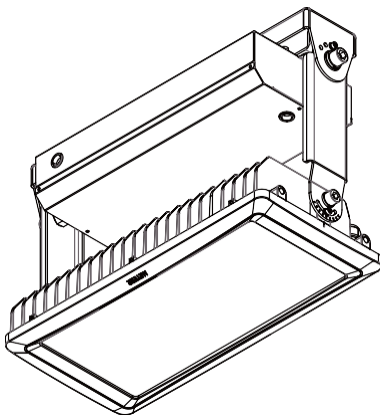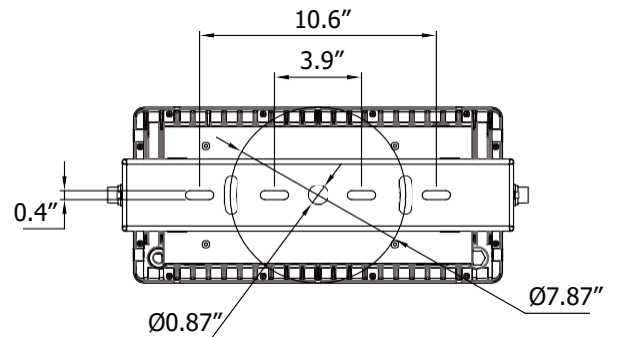


Dimensions

440W / 560W

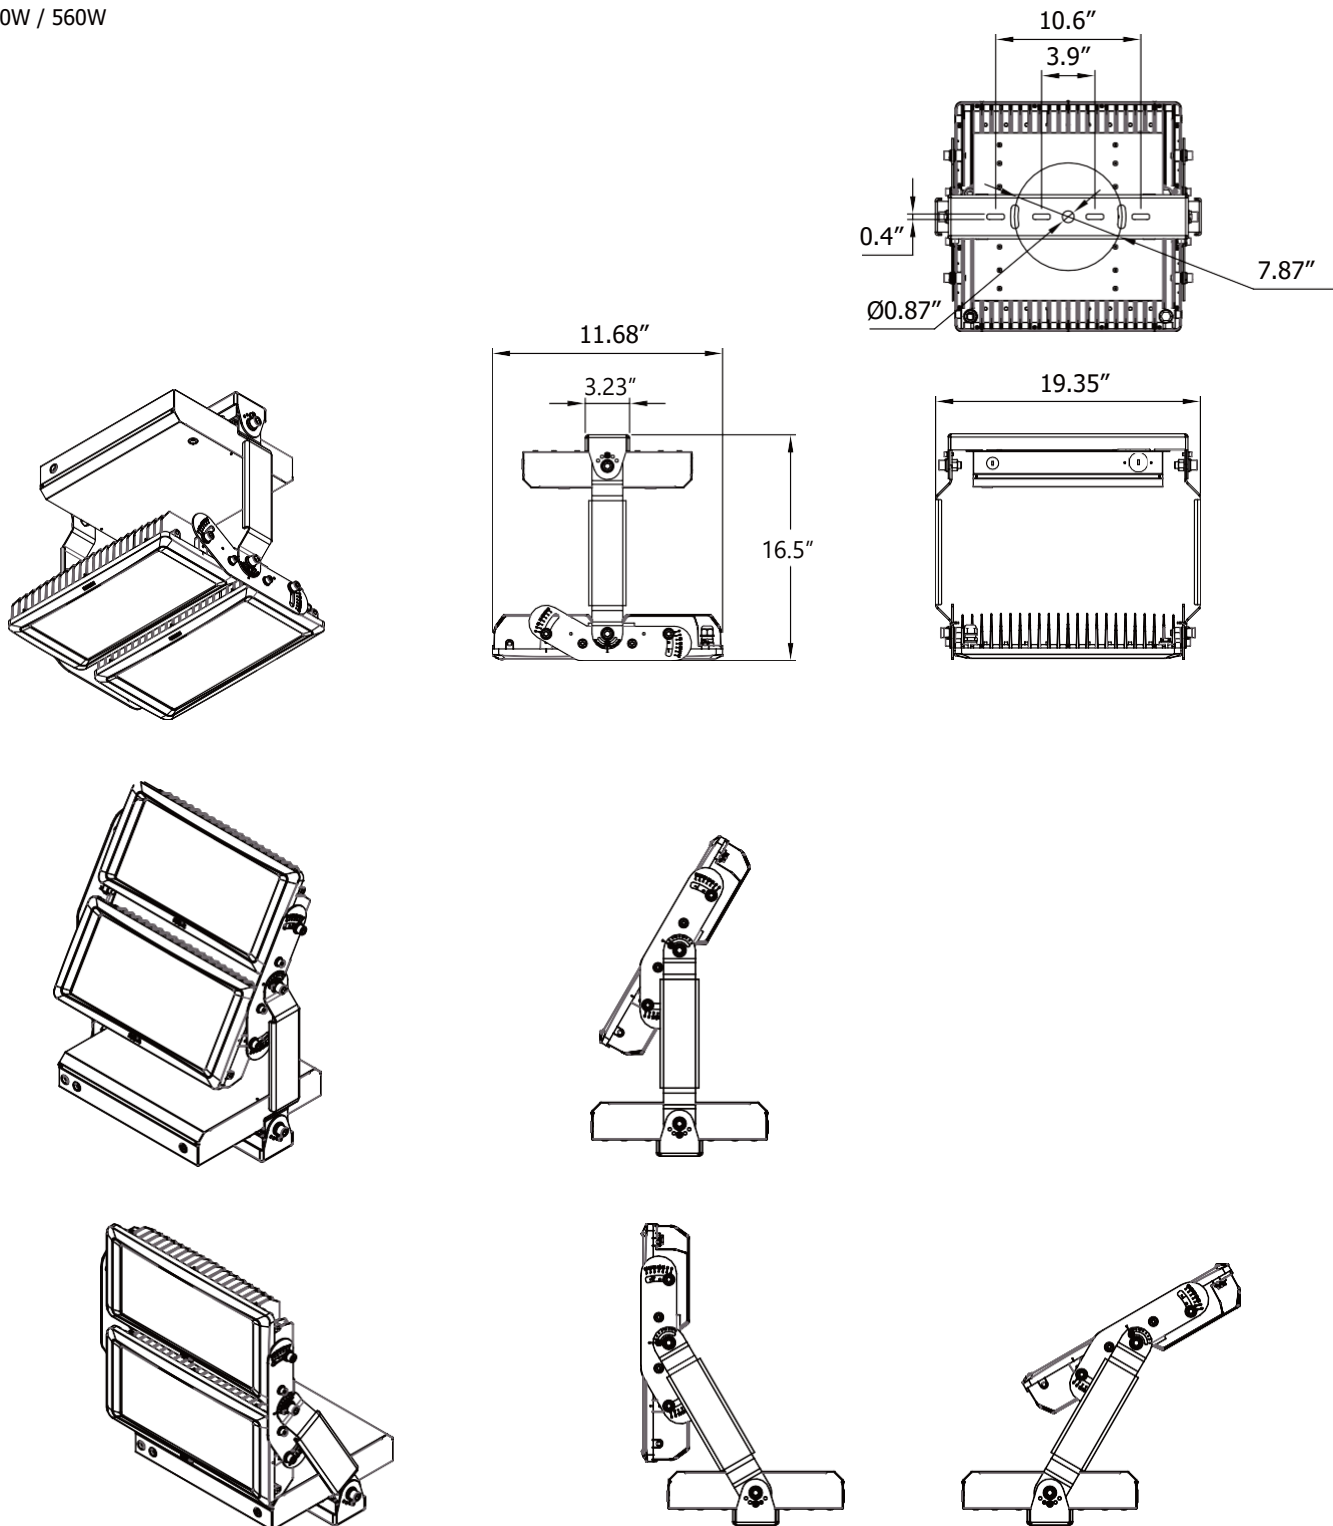


Accessory


Glare Shield Baffle



150W




220W/280W

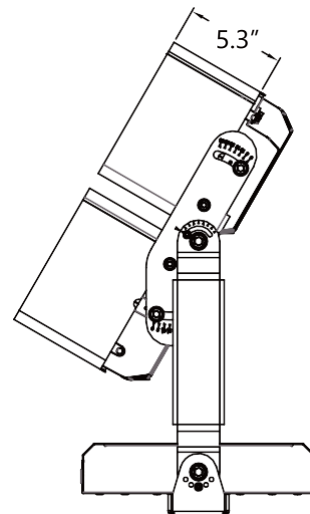


440W/560W


Glare Shield Visor



150W

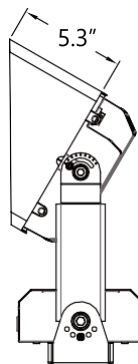


220W/280W

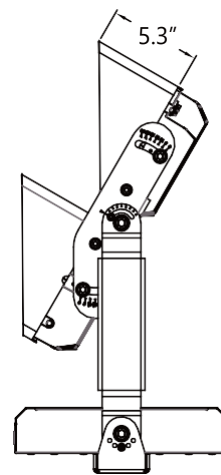


440W/560W


Wire Guard



150W



220W / 280W



440W/560W

Slipfitter

