

ADVANCED HIGH CEILING

# DOT 1.5 - Standard



New Dot 1.5 aperture micro cylinders with up to 800 lumen output package. Available in Black, White and Silver finishes and a variety of mounting options.

Quantity	Type
Project	Note

## Electrical System

- 800 lm (10W)
- Power Input: Universal (120-277V)
- Operating Temperature: +14°F~95°F
- Surge Protection: 2.5KV

## LED Technology

- 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 20°, 30°, 40°, 50°
- UGR ≤19
- Integral Driver
- Rated Life > 60,000 Hours (L70)

## Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

## Housing

- Diameter: 1.5" (40mm)
- Height: 8.5" (216.5mm)
- Material: Aluminum
- Weight: 1.3 lbs

## Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft with Remote Power
- Cord Mount 10ft

## Warranty

- 5-year limited warranty






## Listing

- ETL Damp Location Listed
- CE



**DOT 1.5 - Standard****How to Specify:****Ordering Example: DT1-10-408-UNV-STV-25-BLK-GLD-ST2-HC****4-5 weeks lead time on over 75% of specifications.**

Model	Wattage	CCT / CRI	Voltage	Dimming
DT1			UNV	
DT1 DOT 1.5	<b>10</b> 10W	<b>308</b> 3000K / CRI85 <b>358</b> 3500K / CRI85 <b>408</b> 4000K / CRI85 <b>309</b> 3000K / CRI93 <b>359</b> 3500K / CRI93 <b>409</b> 4000K / CRI93	<b>UNV</b> 120-277V	<b>STV</b> Standard 0-10V dims to 10% <b>SPV</b> Superior 0-10V dims to dark <b>TRC</b> TRIAC dims to 1% (120V ONLY)

Beam Angle	Finish	Trim Finish	Mounting	Accessories
<b>20</b> 20° <b>30</b> 30° <b>40</b> 40° <b>50</b> 50°	<b>BLK</b> Black <b>WHT</b> White <b>SLV</b> Silver	<b>BLK</b> Black <b>WHT</b> White <b>SLV</b> Silver <b>GLD</b> Gold <b>BL</b> Blue  Black  White  Silver  Gold  Blue	<b>SUM</b> Surface Mount <b>ST2</b> Stem 2ft <b>ST4</b> Stem 4ft <b>PL2<sup>1</sup></b> Power Line Mount 2ft <b>PL4<sup>1</sup></b> Power Line Mount 4ft <b>PL6<sup>1</sup></b> Power Line Mount 6ft <b>PL8<sup>1</sup></b> Power Line Mount 8ft <b>PL10<sup>1</sup></b> Power Line Mount 10ft <b>CM10</b> Cord Mount 10ft <sup>1</sup> Option only available with Remote Power	<b>HC<sup>2</sup></b> Honey Comb <b>SL<sup>3</sup></b> Solite Lens  <sup>2</sup> Please factor in change in lumen output of -30% <sup>3</sup> Please factor in change in lumen output of -15%.


**Delivered Lumens\***

Wattage	<b>10W</b>
	Beam Angle: 20°
CCT	
4000K	800 lm
3500K	775 lm
3000K	750 lm

**Current Consumption**

	Volt	120V	277V
Wattage			
10W		0.09A	0.04A


**Dimensions**




\* Tolerance ± 8%

**Mounting Options**


(Canopy Dimensions are the same for all)

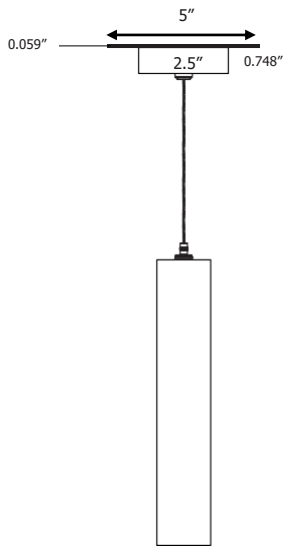


Power Line

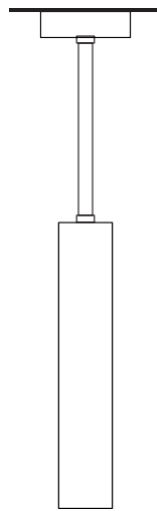

Stem

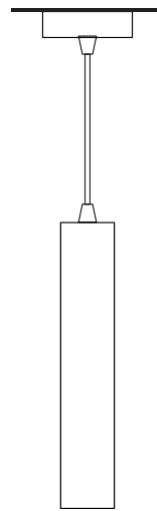

Cord Mount



Surface Mount

**Remote Power**

