

ADVANCED HIGH CEILING

DOT 1.5 - Standard



New Dot 1.5 aperture micro cylinders with up to 800 lumen output package. Available in Black, White and Silver finishes and a variety of mounting options.

Quantity	Type
Project	Note

Electrical System

- 800 lm (10W)
- Power Input: Universal (120-277V)
- Operating Temperature: +14°F~95°F
- Surge Protection: 2.5KV

LED Technology

- 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 20°, 30°, 40°, 50°
- UGR ≤19
- Rated Life > 60,000 Hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

Housing

- Diameter: 1.5" (40mm)
- Height: 8.5" (216.5mm)
- Material: Aluminum
- Weight: 1.3 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE



DOT 1.5 - Standard








How to Specify:

Ordering Example: DT1-10-408-UNV-STV-25-BLK-GLD-ST2-HC

4-5 weeks lead time on over 75% of specifications.

Model	Wattage	CCT / CRI	Voltage	Dimming
DT1			UNV	
DT1	10 10W	308 3000K / CRI85	UNV 120-277V	STV Standard 0-10V dims to 10%
DOT 1.5		358 3500K / CRI85		SPV Superior 0-10V dims to dark
		408 4000K / CRI85		TRC TRIAC dims to 1% (120V ONLY)
		309 3000K / CRI93		
		359 3500K / CRI93		
		409 4000K / CRI93		

Beam Angle	Finish	Trim Finish	Mounting	Accessories
20 20°	BLK Black	BLK Black	SUM Surface Mount	HC² Honey Comb
30 30°	WHT White	WHT White	ST2 Stem 2ft	SL³ Solite Lens
40 40°	SLV Silver	SLV Silver	ST4 Stem 4ft	
50 50°		GLD Gold	PL2¹ Power Line Mount 2ft	
		BL Blue	PL4¹ Power Line Mount 4ft	
		 Black	PL6¹ Power Line Mount 6ft	
		 White	PL8¹ Power Line Mount 8ft	
		 Silver	PL10¹ Power Line Mount 10ft	
		 Gold	CM10 Cord Mount 10ft	² Please factor in change in lumen output of -30%
		 Blue	¹ Option only available with Remote Power	³ Please factor in change in lumen output of -15%.


Delivered Lumens*

Wattage	10W
Beam Angle: 20°	
CCT	
4000K	800 lm
3500K	775 lm
3000K	750 lm

Current Consumption

Wattage	Volt	
	120V	277V
10W	0.09A	0.04A


Dimensions




* Tolerance ± 8%

Mounting Options


(Canopy Dimensions are the same for all)

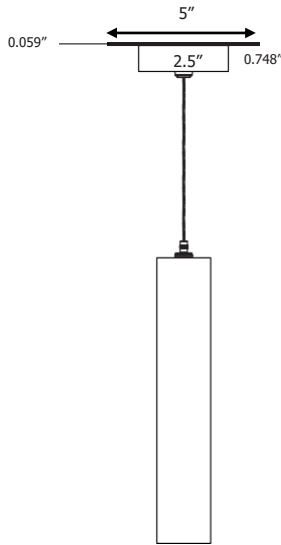


Power Line

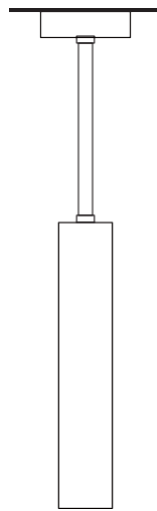

Stem

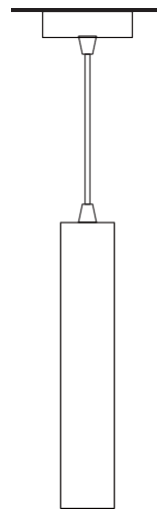

Cord Mount



Surface Mount

Remote Power

