

ADVANCED HIGH CEILING

DOT 1.5 - Standard



New Dot 1.5 aperture micro cylinders with up to 800 lumen output package. Available in Black, White and Silver finishes and a variety of mounting options.

| | |
|----------|------|
| Quantity | Type |
| Project | Note |

Electrical System

- 800 lm (10W)
- Power Input: Universal (120-277V)
- Operating Temperature: +14°F~95°F
- Surge Protection: 2.5KV

LED Technology

- 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 20°, 30°, 40°, 50°
- UGR ≤19
- Rated Life > 60,000 Hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

Housing

- Diameter: 1.5" (40mm)
- Height: 8.5" (216.5mm)
- Material: Aluminum
- Weight: 1.3 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE



DOT 1.5 - Standard








How to Specify:

Ordering Example: DT1-10-408-UNV-STV-25-BLK-GLD-ST2-HC

4-5 weeks lead time on over 75% of specifications.

| Model | Wattage | CCT / CRI | Voltage | Dimming |
|----------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------|
| DT1 | | | UNV | |
| DT1 DOT 1.5 | 10 10W | 308 3000K / CRI85 358 3500K / CRI85 408 4000K / CRI85 309 3000K / CRI93 359 3500K / CRI93 409 4000K / CRI93 | UNV 120-277V | STV Standard 0-10V dims to 10% SPV Superior 0-10V dims to dark TRC TRIAC dims to 1% (120V ONLY) |

| Beam Angle | Finish | Trim Finish | Mounting | Accessories |
|------------------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 20 20° 30 30° 40 40° 50 50° | BLK Black WHT White SLV Silver | BLK Black WHT White SLV Silver GLD Gold BL Blue  Black  White  Silver  Gold  Blue | SUM Surface Mount ST2 Stem 2ft ST4 Stem 4ft PL2¹ Power Line Mount 2ft PL4¹ Power Line Mount 4ft PL6¹ Power Line Mount 6ft PL8¹ Power Line Mount 8ft PL10¹ Power Line Mount 10ft CM10 Cord Mount 10ft ¹ Option only available with Remote Power | HC² Honey Comb SL³ Solite Lens ² Please factor in change in lumen output of -30% ³ Please factor in change in lumen output of -15%. |

Delivered Lumens*


| Wattage | 10W |
|------------------------|--------|
| Beam Angle: 20° | |
| CCT | |
| 4000K | 800 lm |
| 3500K | 775 lm |
| 3000K | 750 lm |

* Tolerance ± 8%

Current Consumption


| Wattage | Volt | |
|---------|-------|-------|
| | 120V | 277V |
| 10W | 0.09A | 0.04A |

Dimensions




Mounting Options


(Canopy Dimensions are the same for all)

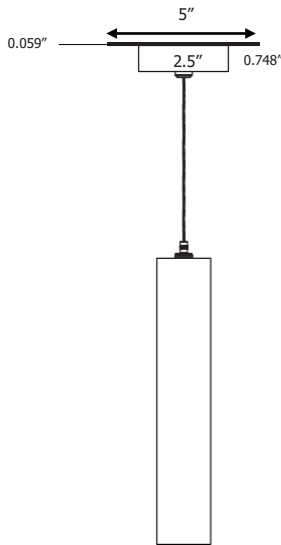


Power Line

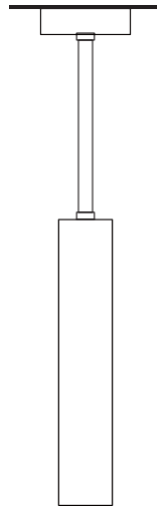

Stem


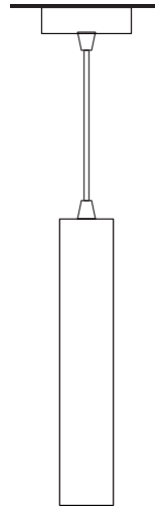


Cord Mount



Surface Mount

Remote Power

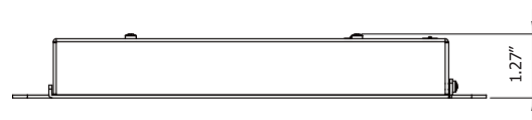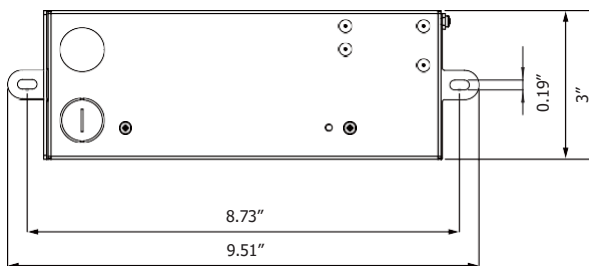

*Standard remote distance between fixture and power box is 1ft.