

ADVANCED HIGH CEILING

DOT 1.5 - Standard



New Dot 1.5 aperture micro cylinders with up to 800 lumen output package. Available in Black, White and Silver finishes and a variety of mounting options.

Quantity	Type
Projec	Note

Electrical System

- 800 lm (10W)
- Power Input: Universal (120-277V)
- Operating Temperature: +14°F~95°F
- Surge Protection: 2.5KV

LED Technology

- 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 20°, 30°, 40°, 50°
- Rated Life > 60,000 Hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

Housing

- Diameter: 1.5" (40mm)
- Height: 8.5" (216.5mm)
- Material: Aluminum
- Weight: 1.3 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE



DOT 1.5 - Standard








How to Specify:

Ordering Example: DT1-10-408-UNV-STV-25-BLK-GLD-ST2-HC

4-5 weeks lead time on over 75% of specifications.

Model	Wattage	CCT / CRI	Voltage	Dimming
DT1			UNV	
DT1 DOT 1.5	10 10W	308 3000K / CRI85 358 3500K / CRI85 408 4000K / CRI85 309 3000K / CRI93 359 3500K / CRI93 409 4000K / CRI93	UNV 120-277V	STV Standard 0-10V dims to 10% SPV Superior 0-10V dims to dark TRC TRIAC dims to 1% (120V ONLY)

Beam Angle	Finish	Trim Finish	Mounting	Accessories
20 20° 30 30° 40 40° 50 50°	BLK Black WHT White SLV Silver	BLK Black WHT White SLV Silver GLD Gold BL Blue  Black  White  Silver  Gold  Blue	SUM Surface Mount ST2 Stem 2ft ST4 Stem 4ft PL2¹ Power Line Mount 2ft PL4¹ Power Line Mount 4ft PL6¹ Power Line Mount 6ft PL8¹ Power Line Mount 8ft PL10¹ Power Line Mount 10ft CM10 Cord Mount 10ft ¹ Option only available with Remote Power	HC² Honey Comb SL³ Solite Lens ² Please factor in change in lumen output of -30% ³ Please factor in change in lumen output of -15%.

Delivered Lumens*


Wattage	10W
	Beam Angle: 20°
CCT	
4000K	800 lm
3500K	775 lm
3000K	750 lm

* Tolerance ± 8%

Current Consumption


	Volt	120V	277V
Wattage			
10W		0.09A	0.04A

Dimensions




Mounting Options


(Canopy Dimensions are the same for all)

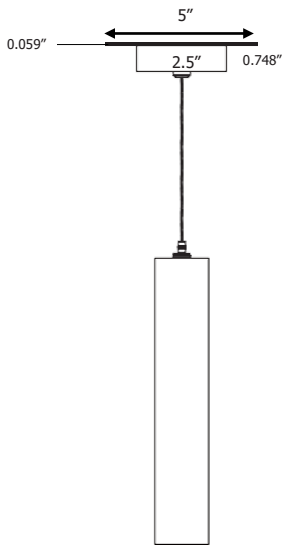


Power Line

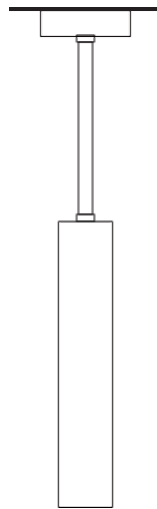

Stem

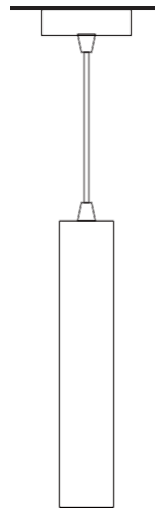

Cord Mount



Surface Mount

Remote Power

