

ADVANCED HIGH CEILING

DOT 2.5 - Standard



New Dot 2.5 aperture micro cylinders with up to 1520 lumen output package. Available in Black, White and Silver finishes and a variety of mounting options.

Quantity	Type
Project	Note

Electrical System

- 800 lm (10W)
- 1200 lm (15W)
- 1520 lm (20W)
- Power Input: Universal (120-277V)
- Operating Temperature: +14°F~95°F
- Surge Protection: 2.5KV

LED Technology

- 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 15°, 25°, 35°, 45°, 60°
- UGR ≤19
- Rated Life > 60,000 Hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

Housing

- Diameter: 2.5" (60mm)
- Height: 8.5" (216.5mm)
- Material: Aluminum
- Weight: 1.9 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft
- Wall Mount
- Surface Adjustable

Warranty

- 5 year limited warranty

Listing

- ETL Damp Location Listed
- CE



DOT 2.5 - Standard








How to Specify:

Ordering Example: DT2-15-408-UNV-STV-15-BLK-BLK-SUM

4-5 weeks lead time on over 75% of specifications.

Model	Wattage	CCT / CRI	Voltage	Dimming
DT2			UNV	
DT 2	10 10W	308 3000K / CRI85	UNV 120-277V	STV Standard 0-10V dims to 10%
DOT 2.5"	15 15W	358 3500K / CRI85		SPV Superior 0-10V dims to dark
	20 20W	408 4000K / CRI85		TRC TRIAC dims to 1% (120V ONLY)
		309 3000K / CRI95		
		359 3500K / CRI95		
		409 4000K / CRI95		

Beam Angle	Finish	Trim Finish	Mounting	Accessories
15 15°	BLK Black	BLK Black	SUM Surface Mount	HC¹ Honey Comb
25 25°	WHT White	WHT White	ST2 Stem 2ft	SL² Solite Lens
35 35°	SLV Silver	SLV Silver	ST4 Stem 4ft	
45 45°		GLD Gold	PL2¹ Power Line Mount 2ft	¹ Please factor in change in lumen output of -30%
60 60°		BL Blue	PL4¹ Power Line Mount 4ft	² Please factor in change in lumen output of -15%.
		 Black	PL6¹ Power Line Mount 6ft	
		 WHT	PL8¹ Power Line Mount 8ft	
		 SLV	PL10¹ Power Line Mount 10ft	
		 GLD	CM10 Cord Mount 10ft	
		 Blue	WLM Wall Mount	
			SA Surface Adjustable	
			¹ Option only available with Remote Power	

Delivered Lumens*


Wattage \ CCT	10W	15W	20W
	Beam Angle: 15°		
4000K	800 lm	1200 lm	1520 lm
3500K	775 lm	1160 lm	1470 lm
3000K	750 lm	1125 lm	1400 lm

* Tolerance ± 8%

Current Consumption


Wattage	Volt	120V	277V
10W		0.09A	0.04A
15W		0.14A	0.06A
20W		0.18A	0.09A

Dimensions




Mounting Options


(Canopy Dimensions are the same for all)

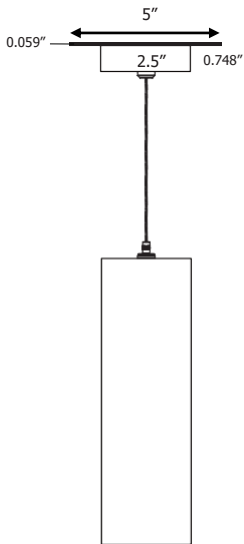


Power Line

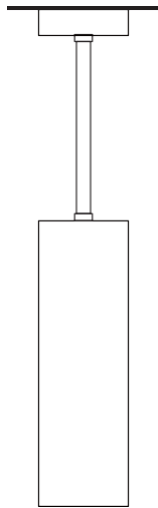


Stem

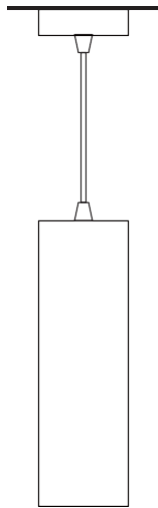


Cord Mount



Surface Mount





Surface Adjustable



Wall Mount

Remote Power

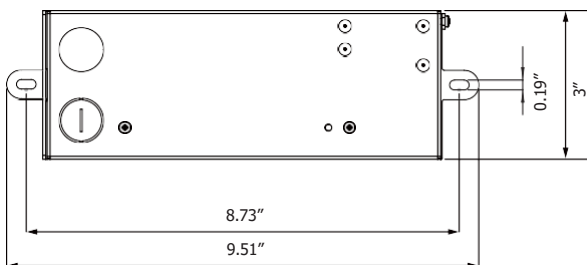

*Standard remote distance between fixture and power box is 1ft.