

ADVANCED HIGH CEILING

DOT 2.5 - Standard



New Dot 2.5 aperture micro cylinders with up to 1520 lumen output package. Available in Black, White and Silver finishes and a variety of mounting options.

Quantity	Type
Project	Note

Electrical System

- 800 lm (10W)
- 1200 lm (15W)
- 1520 lm (20W)
- Power Input: Universal (120-277V)
- Operating Temperature: +14°F~95°F
- Surge Protection: 2.5KV

LED Technology

- 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 15°, 25°, 35°, 45°, 60°
- Rated Life > 60,000 Hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

Housing

- Diameter: 2.5" (60mm)
- Height: 8.5" (216.5mm)
- Material: Aluminum
- Weight: 1.9 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft
- Wall Mount
- Surface Adjustable

Warranty

- 5 year limited warranty

Listing

- ETL Damp Location Listed
- CE



DOT 2.5 - Standard








How to Specify:

Ordering Example: DT2-15-408-UNV-STV-15-BLK-BLK-SUM

4-5 weeks lead time on over 75% of specifications.

Model	Wattage		CCT / CRI		Voltage		Dimming	
DT2					UNV			
DT 2	10	10W	308	3000K / CRI85	UNV	120-277V	STV	Standard 0-10V dims to 10%
DOT 2.5"	15	15W	358	3500K / CRI85			SPV	Superior 0-10V dims to dark
	20	20W	408	4000K / CRI85			TRC	TRIAC dims to 1% (120V ONLY)
			309	3000K / CRI95				
			359	3500K / CRI95				
			409	4000K / CRI95				

Beam Angle		Finish		Trim Finish		Mounting		Accessories	
15	15°	BLK	Black	BLK	Black	SUM	Surface Mount	HC¹	Honey Comb
25	25°	WHT	White	WHT	White	ST2	Stem 2ft	SL²	Solite Lens
35	35°	SLV	Silver	SLV	Silver	ST4	Stem 4ft		
45	45°			GLD	Gold	PL2¹	Power Line Mount 2ft		¹ Please factor in change in lumen output of -30%
60	60°			BL	Blue	PL4¹	Power Line Mount 4ft		² Please factor in change in lumen output of -15%.
					Black	PL6¹	Power Line Mount 6ft		
					WHT	PL8¹	Power Line Mount 8ft		
					SLV	PL10¹	Power Line Mount 10ft		
					GLD	CM10	Cord Mount 10ft		
					Blue	WLM	Wall Mount		
						SA	Surface Adjustable		

¹Option only available with Remote Power

Delivered Lumens*


Wattage \ CCT	10W	15W	20W
	Beam Angle: 15°		
4000K	800 lm	1200 lm	1520 lm
3500K	775 lm	1160 lm	1470 lm
3000K	750 lm	1125 lm	1400 lm

* Tolerance ± 8%

Current Consumption



Wattage	Volt	120V	277V
10W		0.09A	0.04A
15W		0.14A	0.06A
20W		0.18A	0.09A

Dimensions




Mounting Options

(Canopy Dimensions are the same for all)

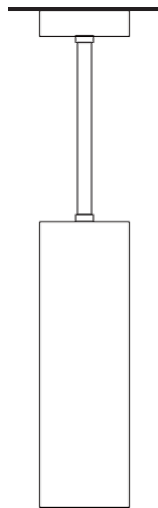


Stem

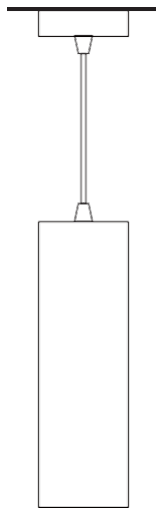


Cord Mount


Power Line



Surface Mount



Surface Adjustable



Wall Mount

Remote Power

