

# DOT 2.5 - Standard



New Dot 2.5 aperture micro cylinders with up to 1520 lumen output package. Available in Black, White and Silver finishes and a variety of mounting options.

Quantity	Type
Project	Note

## Electrical System

- 800 lm (10W)
- 1200 lm (15W)
- 1520 lm (20W)
- Power Input: Universal (120-277V)
- Operating Temperature: +14°F~95°F
- Surge Protection: 2.5KV

## LED Technology

- 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 15°, 25°, 35°, 45°, 60°
- UGR ≤19
- Rated Life > 60,000 Hours (L70)

## Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

## Housing

- Diameter: 2.5" (60mm)
- Height: 8.5" (216.5mm)
- Material: Aluminum
- Weight: 1.9 lbs

## Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft
- Wall Mount
- Surface Adjustable

## Warranty

- 5 year limited warranty

## Listing

- ETL Damp Location Listed
- CE



# DOT 2.5 - Standard








## How to Specify:

**Ordering Example: DT2-15-408-UNV-STV-15-BLK-BLK-SUM**

**4-5 weeks lead time on over 75% of specifications.**

Model	Wattage		CCT / CRI		Voltage		Dimming	
DT2					UNV			
DT 2	<b>10</b>	10W	<b>308</b>	3000K / CRI85	<b>UNV</b>	120-277V	<b>STV</b>	Standard 0-10V dims to 10%
DOT 2.5"	<b>15</b>	15W	<b>358</b>	3500K / CRI85			<b>SPV</b>	Superior 0-10V dims to dark
	<b>20</b>	20W	<b>408</b>	4000K / CRI85			<b>TRC</b>	TRIAC dims to 1% (120V ONLY)
			<b>309</b>	3000K / CRI95				
			<b>359</b>	3500K / CRI95				
			<b>409</b>	4000K / CRI95				

Beam Angle		Finish		Trim Finish		Mounting		Accessories	
<b>15</b>	15°	<b>BLK</b>	Black	<b>BLK</b>	Black	<b>SUM</b>	Surface Mount	<b>HC<sup>1</sup></b>	Honey Comb
<b>25</b>	25°	<b>WHT</b>	White	<b>WHT</b>	White	<b>ST2</b>	Stem 2ft	<b>SL<sup>2</sup></b>	Solite Lens
<b>35</b>	35°	<b>SLV</b>	Silver	<b>SLV</b>	Silver	<b>ST4</b>	Stem 4ft		
<b>45</b>	45°			<b>GLD</b>	Gold	<b>PL2<sup>1</sup></b>	Power Line Mount 2ft		<sup>1</sup> Please factor in change in lumen output of -30%
<b>60</b>	60°			<b>BL</b>	Blue	<b>PL4<sup>1</sup></b>	Power Line Mount 4ft		<sup>2</sup> Please factor in change in lumen output of -15%.
						<b>PL6<sup>1</sup></b>	Power Line Mount 6ft		
						<b>PL8<sup>1</sup></b>	Power Line Mount 8ft		
					Black	<b>PL10<sup>1</sup></b>	Power Line Mount 10ft		
					WHT	<b>CM10</b>	Cord Mount 10ft		
					SLV	<b>WLM</b>	Wall Mount		
					GLD	<b>SA</b>	Surface Adjustable		
					Blue				

<sup>1</sup>Option only available with Remote Power

**Delivered Lumens\***


Wattage \ CCT	10W	15W	20W
	Beam Angle: 15°		
4000K	800 lm	1200 lm	1520 lm
3500K	775 lm	1160 lm	1470 lm
3000K	750 lm	1125 lm	1400 lm

\* Tolerance ± 8%

**Current Consumption**


Wattage	Volt	120V	277V
10W		0.09A	0.04A
15W		0.14A	0.06A
20W		0.18A	0.09A

**Dimensions**




**Mounting Options**


(Canopy Dimensions are the same for all)

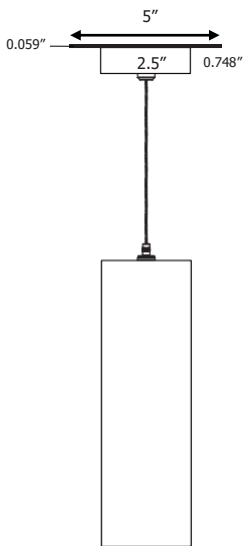


Power Line

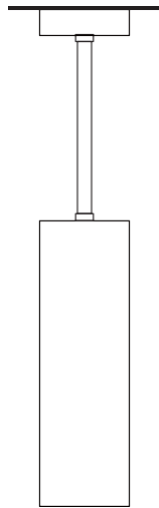


Stem

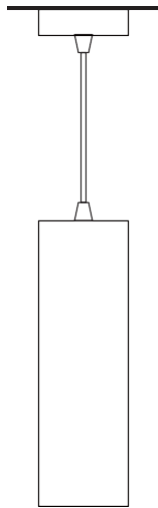


Cord Mount



Surface Mount



Surface Adjustable



Wall Mount

**Remote Power**

