

ADVANCED HIGH CEILING

DOT 2.5 - Standard



New Dot 2.5 aperture micro cylinders with up to 1520 lumen output package. Available in Black, White and Silver finishes and a variety of mounting options.

Quantity	Type
Project	Note

Electrical System

- 800 lm (10W)
- 1200 lm (15W)
- 1520 lm (20W)
- Power Input: Universal (120/277V)
- Operating Temperature: 14°F~95°F
- Surge Protection: 2.5KV

LED Technology

- 2700K, 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 15°, 25°, 35°, 45°, 60°
- UGR ≤ 19
- Rated Life > 60,000 Hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

Housing

- Diameter: 2.5" (60mm)
- Height: 8.5" (216.5mm)
- Material: Aluminum
- Weight: 1.9 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft
- Wall Mount
- Surface Adjustable

Warranty

- 5 year limited warranty

Listing

- ETL Damp Location Listed
- CE



DOT 2.5 - Standard








How to Specify:

Ordering Example: DT2-15-408-UNV-STV-15-BLK-BLK-SUM

4-5 weeks lead time on over 75% of specifications.

Model	Wattage	CCT / CRI	Voltage	Dimming
DT2			UNV	
DT 2	10 10W	278 2700K / CRI85	UNV 120/277V	STV Standard 0-10V dims to 10%
DOT 2.5"	15 15W	308 3000K / CRI85		SPV Superior 0-10V dims to dark
	20 20W	358 3500K / CRI85		TRC TRIAC dims to 1% (120V ONLY)
		408 4000K / CRI85		
		309 3000K / CRI93		
		359 3500K / CRI93		
	409 4000K / CRI93			

Beam Angle	Finish	Trim Finish	Mounting	Accessories
15 15°	BLK Black	BLK Black	SUM Surface Mount	HC¹ Honey Comb
25 25°	WHT White	WHT White	ST2 Stem 2ft	SL² Solite Lens
35 35°	SLV Silver	SLV Silver	ST4 Stem 4ft	¹ Please factor in change in lumen output of -30% ² Please factor in change in lumen output of -15%.
45 45°		GLD Gold	PL2¹ Power Line Mount 2ft	
60 60°		BL Blue	PL4¹ Power Line Mount 4ft	
		 Black	PL6¹ Power Line Mount 6ft	
		 WHT	PL8¹ Power Line Mount 8ft	
		 SLV	PL10¹ Power Line Mount 10ft	
		 GLD	CM10 Cord Mount 10ft	
		 Blue	WLM Wall Mount	
			SA Surface Adjustable	
			¹ Option only available with Remote Power	

Delivered Lumens*


Wattage	10W	15W	20W
CCT	Beam Angle: 15°		
4000K	800 lm	1200 lm	1520 lm
3500K	775 lm	1160 lm	1470 lm
3000K	750 lm	1125 lm	1400 lm
2700K	700 lm	1050 lm	1350 lm

* Tolerance ± 8%

Current Consumption


Wattage	120V	277V
10W	0.09A	0.04A
15W	0.14A	0.06A
20W	0.18A	0.09A

Dimensions





Mounting Options

(Canopy Dimensions are the same for all)

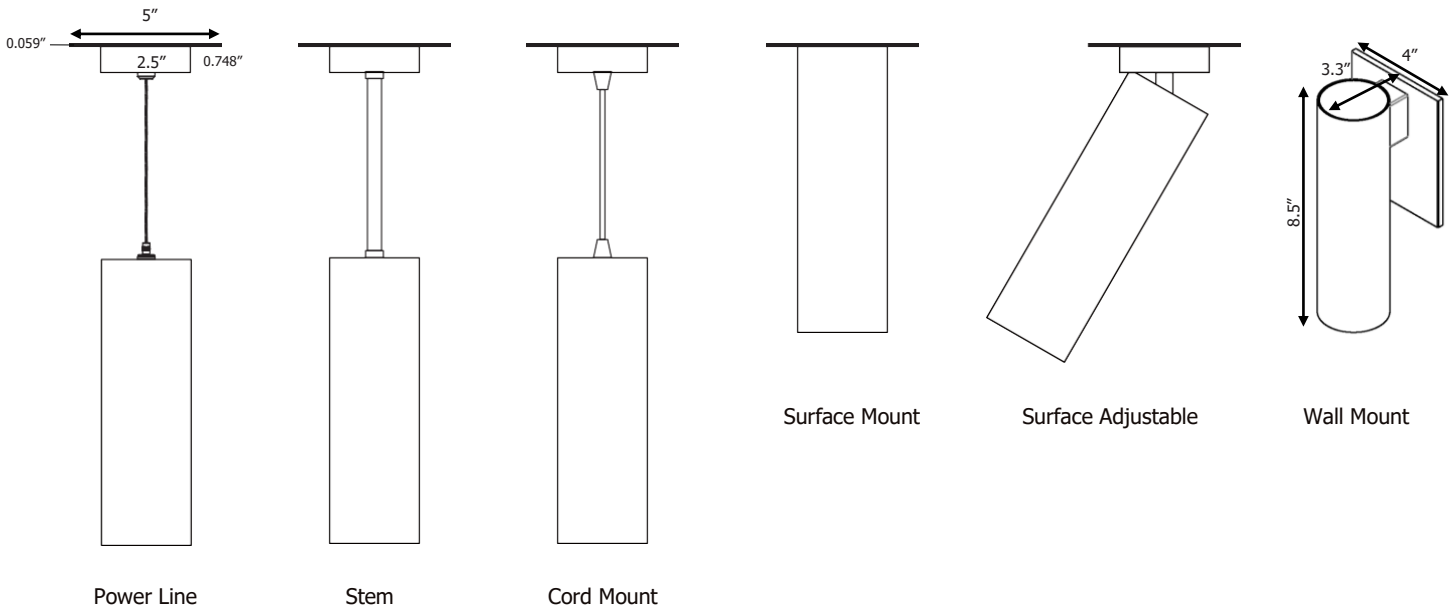

Remote Power

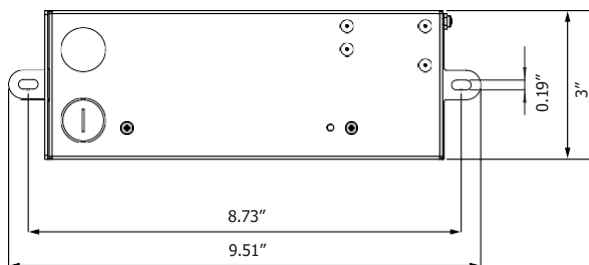

*Standard remote distance between fixture and power box is 1ft.