


REIZEN – W+RGB Outdoor with Remote Power



The REIZEN is an indirect asymmetric luminaire available in sconce or pendant forms, available with our Colorflip™ W+RGB technology. 50% of the 150W Light Engine is true 3000K and 50% is RGB. This unique approach to RGBW color changing brings a multifaceted option to a variety of architectural high ceiling spaces such as commercial, education, hospitality, municipalities, retail, and sports-recreation areas.

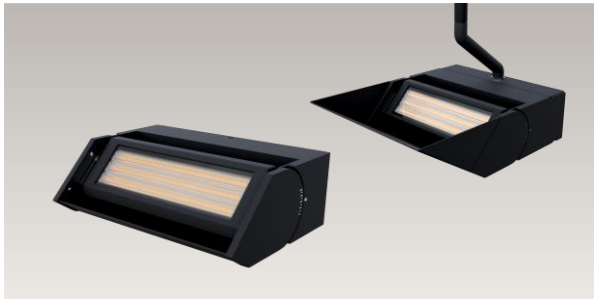

Quantity	Type
Project	Note

Electrical System

- 150W Light Engine / 3000K=75W, RGB=75W
- Power Input: Universal (120-277V)
- Operating Temperature: -40°F~113°F
- Surge Protection: 4 KV
- Power Factor Greater than 0.9
- Remote driver on all product configurations

Mounting

- Wall Mount
- Stem Mount

Warranty

- 5-year limited warranty

LED Technology

- White CCT: 3000K
- 85 CRI, 5000K / 75 CRI
- Beam Angle: Asymmetric
- Rated Life > 60,000 Hours (L70)

Listing

- ETL Wet Location Listed Luminaire
- FCC
- CE

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- DMX: high resolution dims to 0.1%
(Supports ANSI E1.20 RDM protocol)

Fixture Housing

- Dimensions & Weight:
- Standard: 13.05" x 9.84" x 4.33" (19.8 lb)
- With Visor: 13.05" x 14.77" x 4.33" (22.9 lb)
- Material: Stainless Steel Housing, Aluminum Heat Sink

Remote Dry Location Power Box Housing

- Dimensions & Weight: 15" x 6.59" x 3.62" (19.8 lb)



REIZEN – W+RGB Outdoor with Remote Power



How to Specify:

Ordering Example: **RI-308C-UNV-DMXR-ASY-WHT-WLM-GSV-OUT**

4-5 weeks lead time on over 75% of specifications.

Model	Light Source	Voltage	Dimming
RI			
REIZEN	308C 150W Light Engine 11,265 Combined Delivered Lumens 3000K / CRI 85 + RGB	UNV 120-277V	DMXR DMX dims to 0.1% (RJ45 Sockets)

Beam Angle	Finish	Mounting	Accessories
ASY Asymmetric	BLK Black WHT White	WLM Wall Mount ST4 Stem 4ft ST8¹ Stem 8 ft	GSV¹ Glare Shield Visor
		¹ Includes two 4ft stem connected by an adapter.	¹ Please factor in change in lumen output of -10%.

Rating

OUT	Outdoor Rating
NAT	Natatorium Rating

REIZEN – W+RGB Outdoor with Remote Power




Delivered Lumens*

Light Source CCT	308C 150W Light Engine	
	Beam Angle: Asymmetric	
R	25 W	310 lm
G	25 W	2,750 lm
B	25 W	205 lm
W	75 W	8,000 lm

*Tolerance±8%

Current Consumption

Light Source	Wattage	120V	277V
308C	150W	1.38A	0.60A

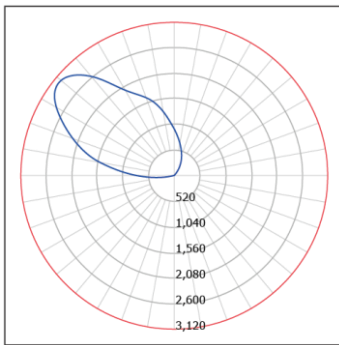

308C

Descriptive Information

Total delivered lumens: 11,265 Lumens

Input watts at 120V: 150 W

Source: LED


CCT/CRI: 4000K/85CRI

REIZEN – W+RGB Outdoor with Remote Power




Dimensions

308C / Wall Mount

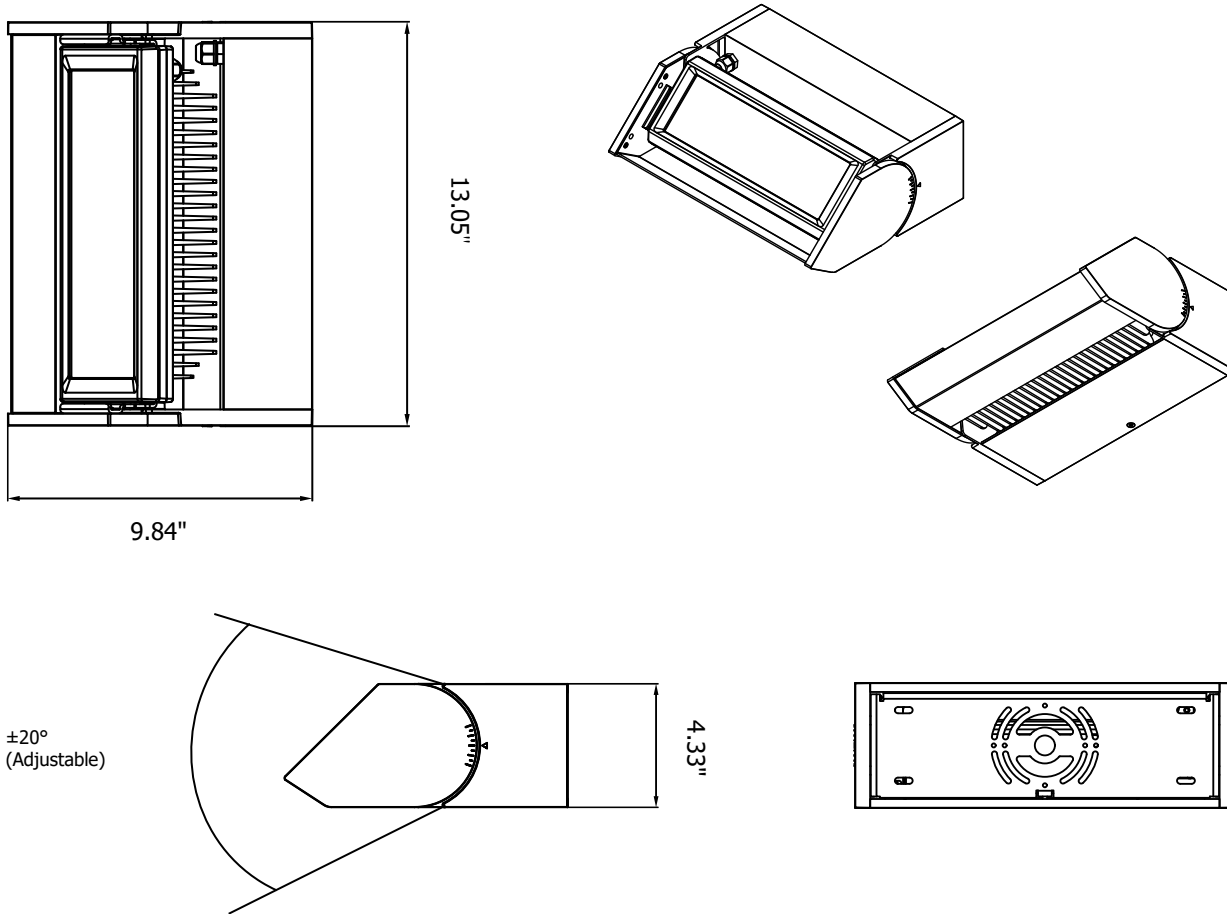

Remote Power Box

(Standard 3' cable provided, must be mounted in Dry Location)

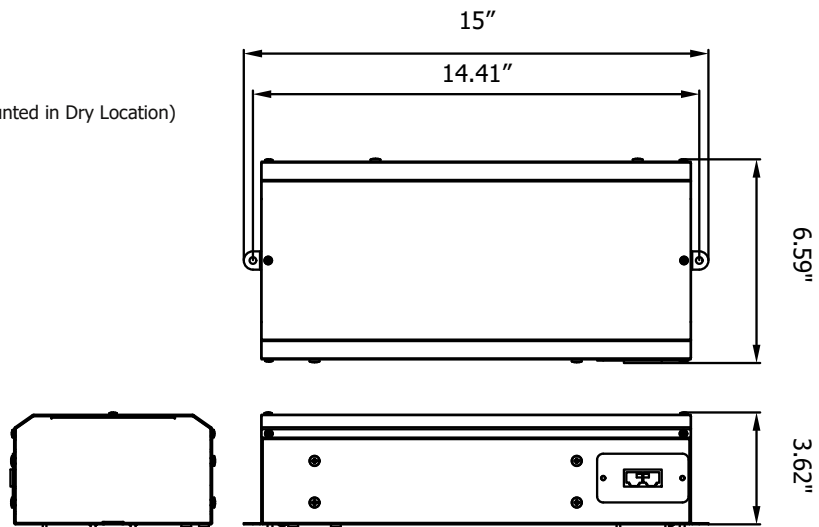


REIZEN – W+RGB Outdoor with Remote Power



Dimensions

308C / Stem Mount

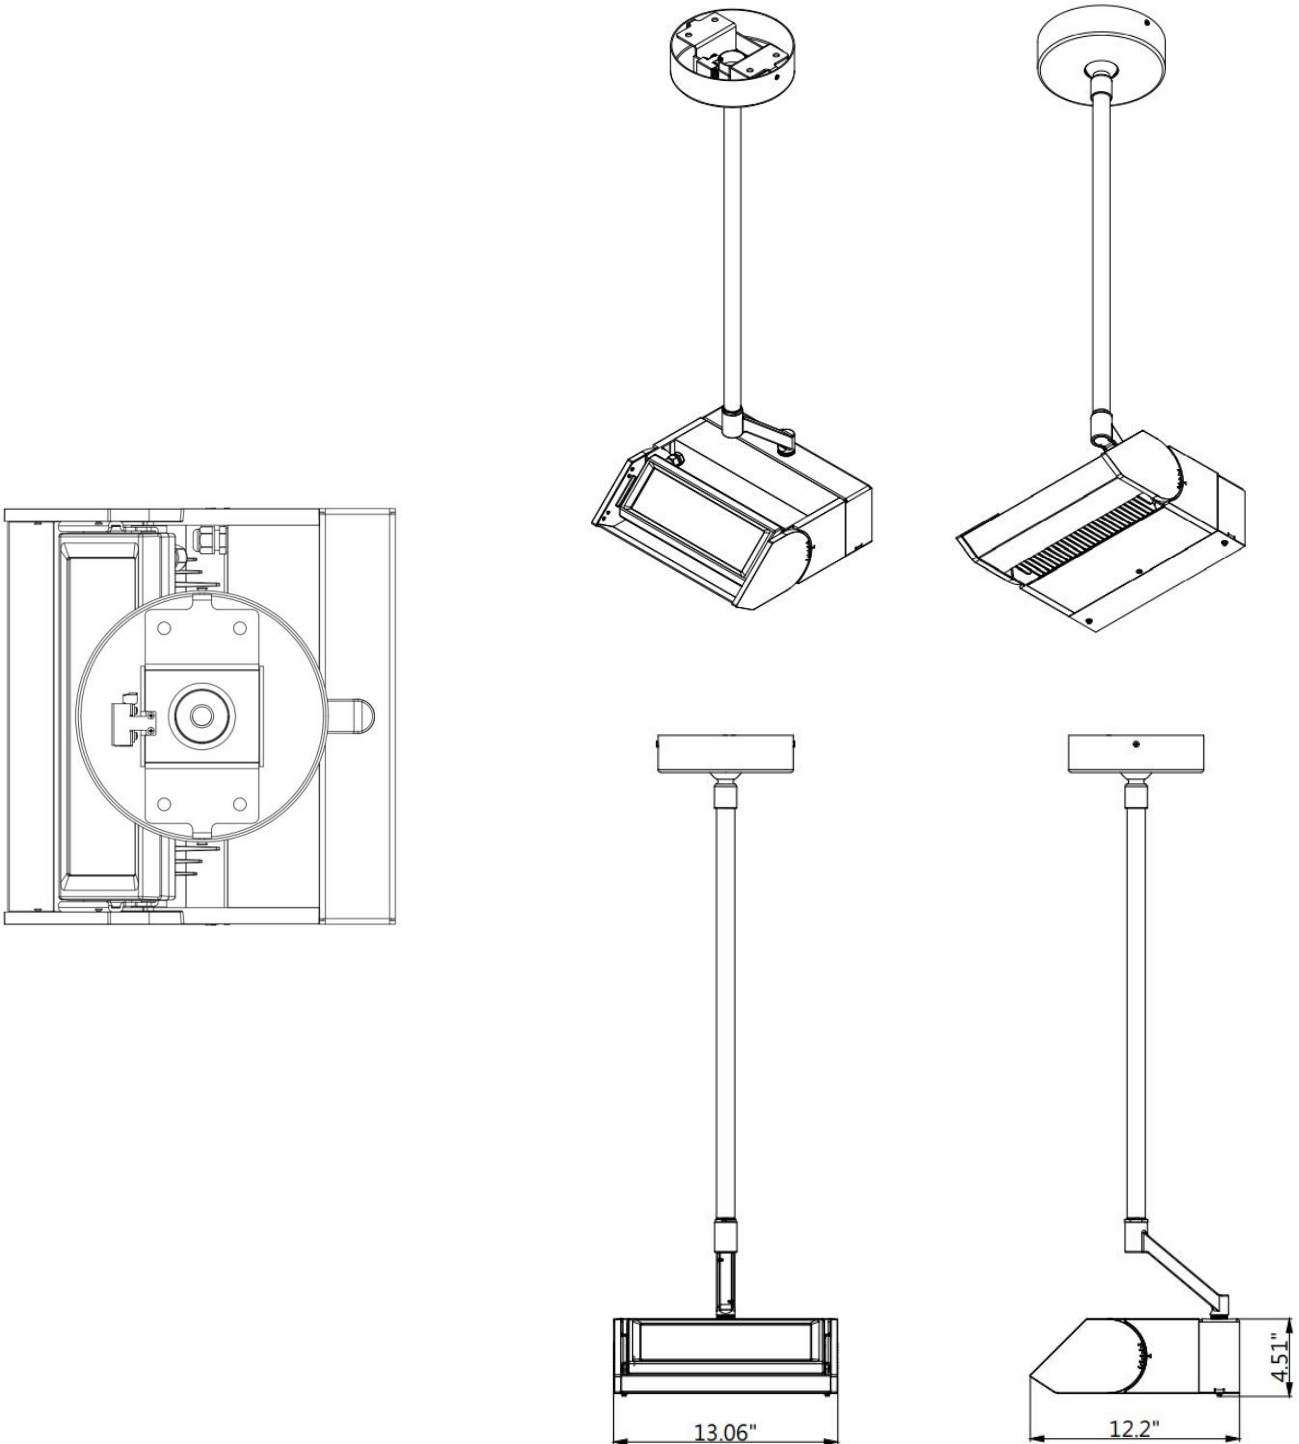

REIZEN – W+RGB Outdoor with Remote Power



Accessory

Glare Shield Visor

308C

