



The REIZEN is an indirect asymmetric luminaire available in sconce or pendant forms, available with our Colorflip $^{\text{TM}}$ W+RGB technology. 50% of the 150W Light Engine is true 3000K and 50% is RGB. This unique approach to RGBW color changing brings a multifaceted option to a variety of architectural high ceiling spaces such as commercial, education, hospitality, municipalities, retail, and sports-recreation areas.



Quantity	Туре	
Project	Note	

Electrical System

- 150W Light Engine / 3000K=75W, RGB=75W
- Power Input: Universal (120-277V)
- Operating Temperature: -40°F~113°F
- Surge Protection: 4 KV
- Power Factor Greater than 0.9

LED Technology

- White CCT: 3000K
- 85 CRI, 5000K / 75 CRI
- Beam Angle: Asymmetric
- Rated Life > 60,000 Hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

 DMX: high resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Housing

- Dimensions & Weight:
- Standard: 13.05"x 9.84"x 4.33" (19.8 lb) - With Visor: 13.05"x 14.77"x 4.33" (22.9 lb)
- Material: Stainless Steel Housing, Aluminum Heat Sink

Mounting

- Wall Mount
- Stem Mount

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- FCC
- CE





How to Specify:

Ordering Example: RISE-308C-UNV-DMXR-ASY-WHT-WLM-GSV

4-5 weeks lead time on over 75% of specifications.

Model	Light Source		Voltage		Dimming	
RI						
REIZEN	308C	150W Light Engine 11,265 Combined Delivered Lumens 3000K / CRI 85 + RGB	UNV	120-277V	DMXR	DMX dims to 0.1% (RJ45 Sockets)

Beam Angle		Finish		Mou	nting	Accessories	
ASY As	ymmetric	BLK WHT	Black White	WLM ST4 ST8¹ ¹Includes two 4ft stem of	Wall Mount Stem 4ft Stem 8 ft connected by an adapter.	GSV ¹ ¹ Please factor in ch	Glare Shield Visor ange in lumen output of -10%.

Delivered Lumens*


Light Source	308C			
	150W Light Engine			
ССТ	Beam Angle: Asymmetric			
R	25 W	310 lm		
G	25 W	2,750 lm		
В	25 W	205 lm		
w	75 W	8,000 lm		

^{*}Tolerance±8%

Current Consumption

Light Source	Wattage	120V	277V	
308C	150W	1.38A	0.60A	





308C

Descriptive Information

Total delivered lumens: 11,265 Lumens

Input watts at 120V: 150 W


Source: LED


CCT/CRI: 4000K/85CRI




Dimensions

308C / Wall Mount



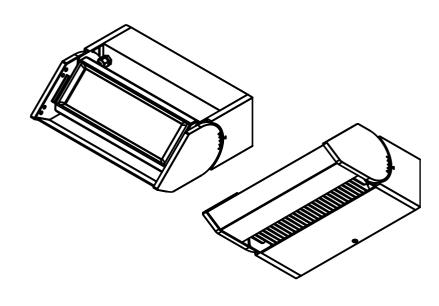

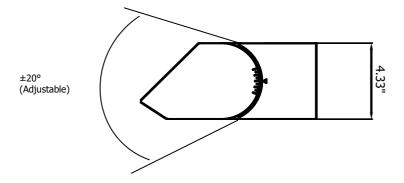







Dimensions

308C / Stem Mount



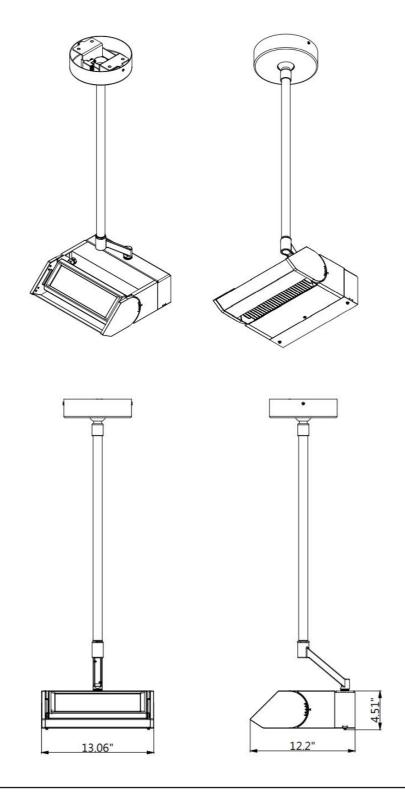



AccessoryGlare Shield Visor



