



SH-200 - Solar LED Paver

Water Proof / No Wiring

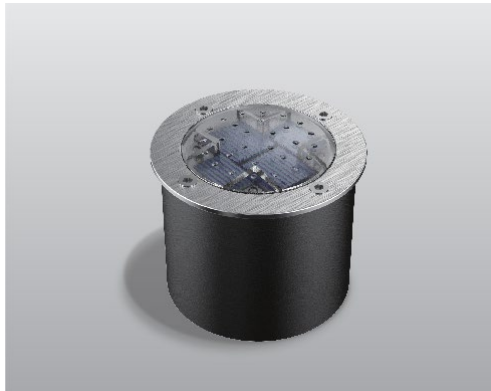

METEOR Solar LED Paver lights incorporate state-of-the-art technology, combining the best solar panels, power storage and optical design to create products that will function for years to come.



Quantity
Project
Note
Type

General

Weight: 0.55 lbs
 Rim Finish: Brushed/Polished stainless steel; Optional: SUS316 stainless steel / Brass
 Lens: GE super light permeable PC
 Housing: SUS304 stainless steel, cast aluminum
 Power Storage: Ultracapacitor

Operational

Operation Time: Minimum 12 hours(fully charged) 4-8 hours(overcast)
 Full Charge Time: 6 hours(direct sunlight)
 Switch: Light sensitive auto on/off

Environmental

Compressive Strength: 9902 lbs/4456 kgs(maximum)
 Operating Temperature: -4o F to 140o F
 Storage Temperature: -13o F to 176o F

Warranty

3 year limited warranty. See www.meteor-lighting.com for details.



How To Specify

Ordering Example: SH200C-AMB-BS

Model	CCT	Finish	Housing
SH200C (Product)	AMB (Amber)	BS (Brushed Stainless Steel)	HS* (Housing and Anchor Plate Included)
SH200B (Battery sample)	BLU (Blue)	PS (Polished Stainless Steel)	
	GEN (Green)	SS (SUS316 Stainless Steel)	
	RED (Red)	BR (Brass)	
	WHT (White/5500-6000K)		
	WAM (Warm White/2800-3000K)		

*Without Anchor Plate Included

*Color	LUX(Average)
White	25
Amber	25
Red	50
Blue	20
Green	55
Warm White	25