



SH-260 - Solar LED Paver

Water Proof / No Wiring

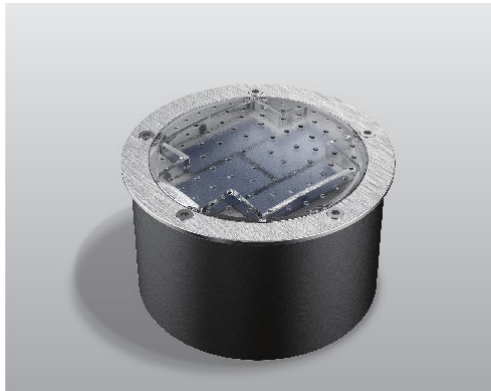

METEOR Solar LED Paver lights incorporate state-of-the-art technology, combining the best solar panels, power storage and optical design to create products that will function for years to come.



| |
|----------|
| Quantity |
| Project |
| Note |
| Type |

General

Weight: 1.28 lbs
 Rim Finish: Brushed/Polished stainless steel; Optional: SUS316 stainless steel / Brass
 Lens: GE super light permeable PC
 Housing: SUS304 stainless steel, cast aluminum
 Power Storage: Ultracapacitor

Operational

Operation Time: Minimum 12 hours(fully charged) 4-8 hours(overcast)
 Full Charge Time: 6 hours(direct sunlight)
 Switch: Light sensitive auto on/off

Environmental

Compressive Strength: 9902 lbs/4456 kgs(maximum)
 Operating Temperature: -4o F to 140o F
 Storage Temperature: -13o F to 176o F

Warranty

3 year limited warranty. See www.meteor-lighting.com for details.



How To Specify

Ordering Example: SH260C-AMB-BS-HS

| Model | CCT | Finish | Housing |
|--------------------------------|------------------------------------|--------------------------------------|---|
| SH260C (Product) | AMB (Amber) | BS (Brushed Stainless Steel) | HS (Housing and Anchor Plate Included) |
| SH260B (Battery sample) | BLU (Blue) | PS (Polished Stainless Steel) | |
| | GEN (Green) | SS (SUS316 Stainless Steel) | |
| | RED (Red) | BR (Brass) | |
| | WHT (White/5500-6000K) | | |
| | WAM (Warm White/2800-3000K) | | |

| *Color | LUX(Average) |
|------------|--------------|
| White | 40 |
| Amber | 40 |
| Red | 65 |
| Blue | 45 |
| Green | 80 |
| Warm White | 40 |