

ADVANCED HIGH CEILING

Tetriss 2.0 - All White**METEOR**

High-performing modular luminaire with lumen output 16600-60300lm for replacement of up to 1500W Metal Halide. Additional features include IP65, outdoor/natatorium rating.

- Outdoor/Natatorium Rating

(Please refer to Outdoor/Natatorium Version spec sheet)

Quantity		Type	
Project		Note	

Electrical System

- 20100 lm (200W)
- 40200 lm (400W)
- 60300 lm (600W)
- Power Input: Universal (120-277V); HVT (347-480V)
- Operating Temperature: -40°F~112°F
- Surge Protection: 10KV
- Remote Emergency Pack: Bodine BSL20MV

LED Technology

- 3000K, 4000K, 5000K
- 75 CRI, 85 CRI
- Beam Angle: 25°, 40°, 60°
- Rated Life > 60,000 hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V dims to 10%
 - Superior 0-10V: dims to 1%
 - DMX: high resolution dims to 0.1%
- (Supports ANSI E1.20 RDM protocol)

Housing

- Material: Aluminum, Tempered Glass
- Weight: 200W / 18lbs, 400W / 37.48lbs, 600W / 57.3lbs

Mounting

- Bracket Mount
- (AC/Dimming cable length: Standard / 6ft)

Warranty

- 5 years limited warranty.

Listing

- ETL Damp Location Listed
- CE



Tetriss 2.0 - All White**How To Specify:****Ordering Example: TSW-400-507-UNV-DMX-25-BLK-BRK**

Model	Wattage		CCT / CRI		Voltage	Dimming	
TSW							
TSW Tetriss Solid White	200 200W		308 3000K / CRI85		UNV 120-277V	STV Standard 0-10V <10%	
	400 400W		408 4000K / CRI85		HVT 347-480V	SPV Superior 0-10V <1%	
	600 600W		507 5000K / CRI75			DMX DMX <0.1% (XLR Sockets)	
Beam Angle	Finish		Mounting		Accessories		
	BLK		BRK				
25 25°	BLK Black		BRK Bracket Mount		GSB* Glare Shield Baffle		
40 40°					GSV* Glare Shield Visor		
60 60°					EMP Remote Emergency Pack		
					SLP Slipfitter		
*Please factor in change in lumen output of -25%.							

ADVANCED HIGH CEILING
Tetriss 2.0 - All White




Delivered Lumens*


Wattage CCT	200W	400W	600W
5000K	20100 lm	40200 lm	60300 lm
4000K	17700 lm	35400 lm	53010 lm
3000K	16600 lm	33200 lm	49600 lm

*Tolerance ± 8%


Dimensions

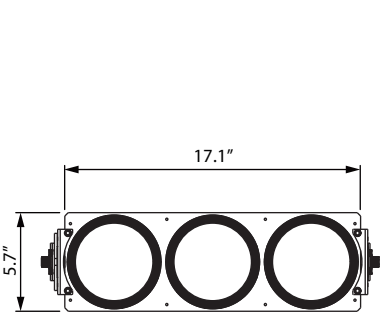

200W / 3 Modules

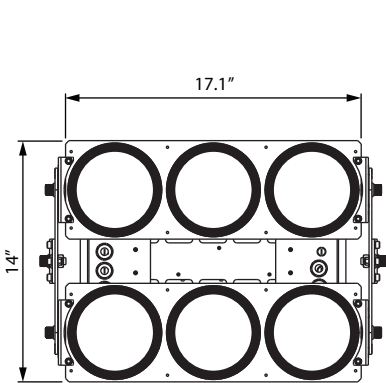


400W / 6 Modules

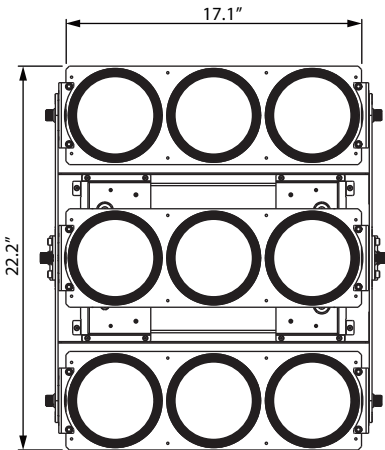


600W / 9 Modules

Tetriss 2.0 - All White


Mounting Options

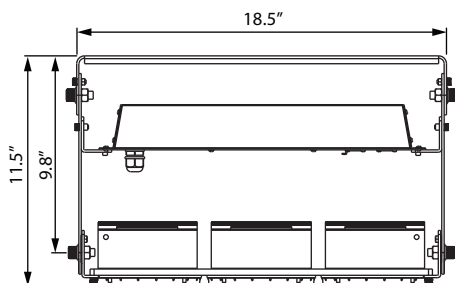




Bracket Mount / 3 Modules

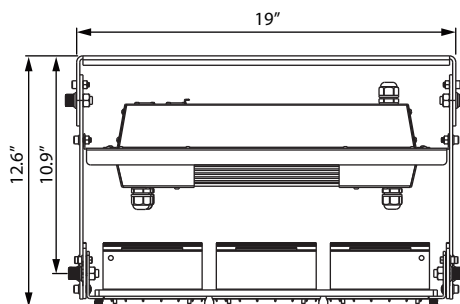

Bracket Mount / 6 Modules

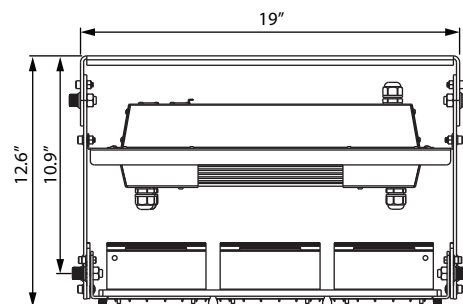

Bracket Mount / 9 Modules

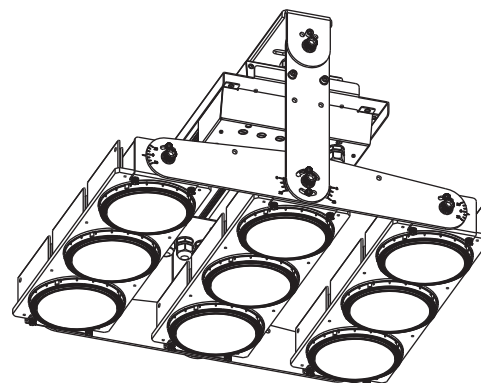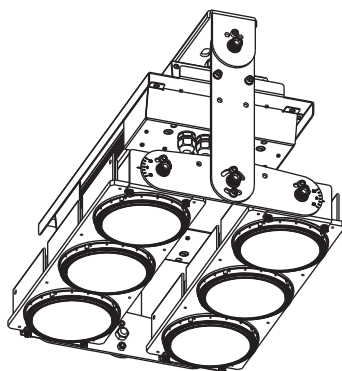

Accessory

Glare Shield Baffle

Glare Shield Visor

