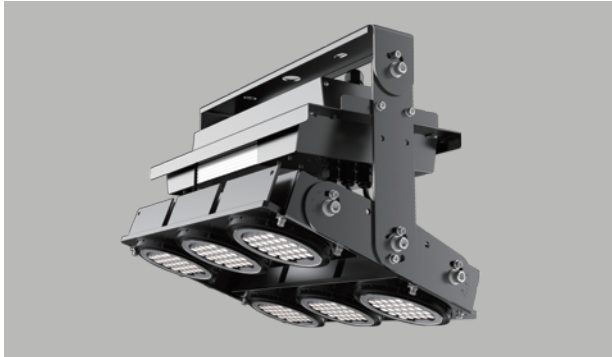


ADVANCED HIGH CEILING

Tetriss 2.0 - Outdoor/Natatorium**METEOR**

High-performing modular luminaire with lumen output 16600-60300lm for replacement of up to 1500W Metal Halide.

- Outdoor/Natatorium Rating

Special coating, sealant, and wiring is applied for long term operation in harsh environments.

- Standard version available

(Please refer to Standard Version spec sheet)

Quantity		Type	
Project		Note	

Electrical System

- 20100 lm (200W)
- 40200 lm (400W)
- 60300 lm (600W)
- Power Input: Universal (120-277V); HVT (347-480V)
- Operating Temperature: -40°F~112°F
- Surge Protection: 10KV

LED Technology

- 3000K, 4000K , 5000K
- 75 CRI, 85 CRI
- Beam Angle: 25°, 40°, 60°
- Rated Life > 60,000 hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V dims to 10%

Housing

- Material: Aluminum, Tempered Glass
- Weight: 200W / 18lbs, 400W / 37.48lbs, 600W / 57.3lbs

Mounting

- Bracket Mount
- (AC/Dimming cable length: Standard / 6ft)

EPA

- TSW-200: 1.21 ft² / TSW-400: 2.12 ft² / 600: 2.69 ft²

Warranty

- 5 years limited warranty.

Listing

- ETL Wet Location Listed
- Natatorium Rating (optional)
- IP65 Outdoor Rating (optional)
- CE



Tetriss 2.0 - Outdoor/Natatorium**How To Specify:****Ordering Example: TSW-400-507-UNV-STV-25-BLK-BRK-OUT**

Model	Wattage	CCT / CRI	Voltage	Dimming
TSW				STV
TSW Tetriss Solid White	200 200W 400 400W 600 600W	308 3000K / CRI85 408 4000K / CRI85 507 5000K / CRI75	UNV 120-277V HVT 347-480V	STV Standard 0-10V <10%

Beam Angle	Finish	Mounting	Accessories	Rating
	BLK	BRK		
25 25° 40 40° 60 60°	BLK Black	BRK Bracket Mount	GSB* Glare Shield Baffle GSV* Glare Shield Visor SLP Slipfitter	OUT ¹ Outdoor Rating NAT ² Natatorium Rating

*Please factor in change in lumen output of -25%.

¹ Outdoor rating: Coating and wiring will be changed to high UV resistant and corrosion resistant materials for long term operation in outdoor environments.
² Natatorium rating: Coating and sealant will be changed to high corrosion resistant materials to prevent damage from long term exposure to chlorine vapors.

ADVANCED HIGH CEILING
Tetriss 2.0 - Outdoor/Natatorium




Delivered Lumens*


Wattage CCT	200W	400W	600W
5000K	20100 lm	40200 lm	60300 lm
4000K	17700 lm	35400 lm	53010 lm
3000K	16600 lm	33200 lm	49600 lm

*Tolerance ± 8%


Dimensions

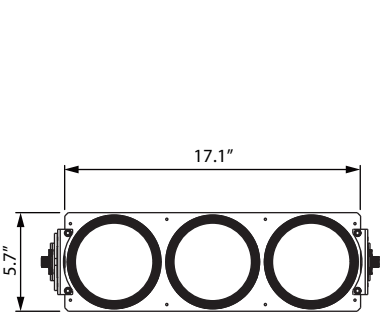

200W / 3 Modules

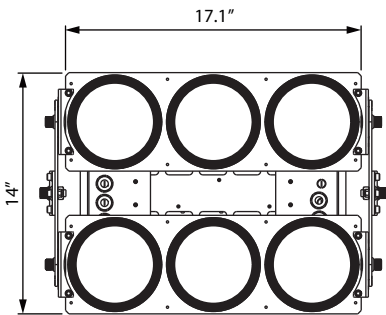


400W / 6 Modules

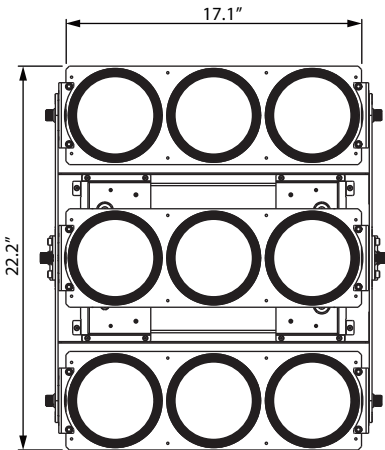


600W / 9 Modules

Tetriss 2.0 - Outdoor/Natatorium


Mounting Options

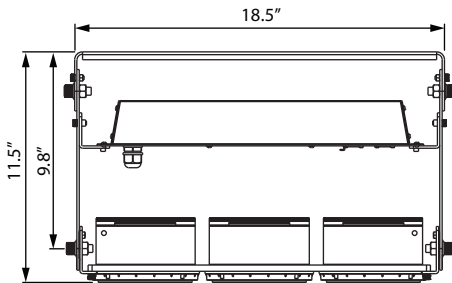




Bracket Mount / 3 Modules

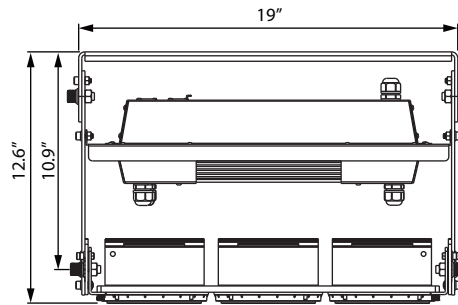

Bracket Mount / 6 Modules


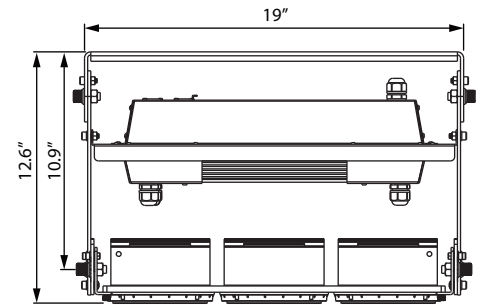


Bracket Mount / 9 Modules

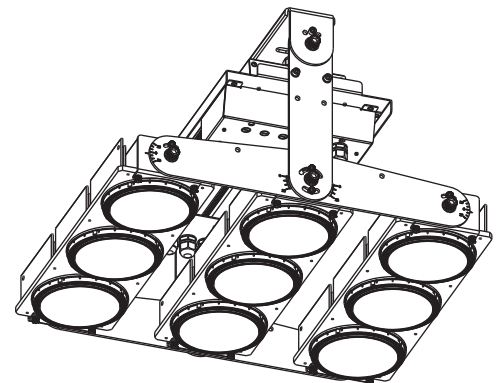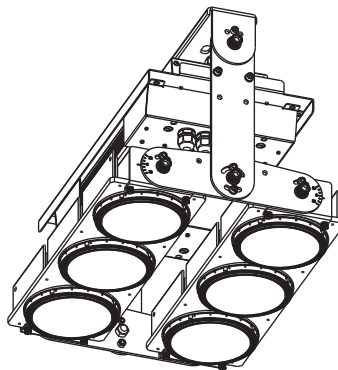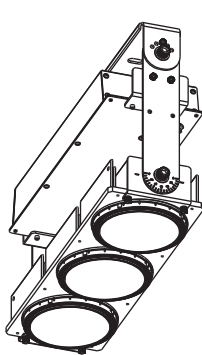

Accessory

Glare Shield Baffle



Glare Shield Visor

