

ADVANCED HIGH CEILING

Tetriss 2.0 - W+RGB**METEOR**

High-performing fixture that can be configured with any combination of white and RGB modules.



Quantity		Type	
Project		Note	

Electrical System

- 15330 lm (200W)
- 30660 lm (400W)
- 45990 lm (600W)
- Power Input: Universal (120-277V); HVT (347-480V)
- Operating Temperature: -40°F~112°F
- Surge Protection: 10KV
- Remote Emergency Pack: Bodine BSL20MV

LED Technology

- White / CCT 3000K, 4000K, 5000K
- RGB / Wavelength R:630nm G:530nm B:475nm
- 75 CRI, 85 CRI
- Beam Angle: 25°, 40°, 60°
- Rated Life > 60,000 hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- DMX: high resolution dims to 0.1%
(Supports ANSI E1.20 RDM protocol)

Housing

- Material: Aluminum, Tempered Glass
- Weight: 200W / 18lbs, 400W / 37.48lbs, 600W / 57.3lbs

Mounting

- Bracket Mount
(AC/Dimming cable length: Standard / 6ft)

Warranty

- 5 years limited warranty.

Listing

- ETL Damp Location Listed
- CE



Tetriss 2.0 - W+RGB**How To Specify:****Ordering Example: TSC-400-507-UNV-DMX-25-BLK-BRK**

Model	Wattage	CCT / CRI	Voltage	Dimming
TSC				
TSC Tetriss W+RGB	200 200W 400 400W 600 600W	308 3000K / CRI85 408 4000K / CRI85 507 5000K / CRI75	UNV 120-277V HVT 347-480V	DMX DMX <0.1% (XLR Sockets)

Beam Angle	Finish	Mounting	Accessories
	BLK	BRK	
25 25° 40 40° 60 60°	BLK Black	BRK Bracket Mount	GSB* Glare Shield Baffle GSV* Glare Shield Visor EMP Remote Emergency Pack SLP Slipfitter

*Please factor in change in lumen output of -25%.

ADVANCED HIGH CEILING
Tetriss 2.0 - W+RGB



Delivered Lumens* (Single White Module)

Wattage CCT	70W
5000K	6700 lm
4000K	5900 lm
3000K	5440 lm


*Tolerance ± 8%

Delivered Lumens* (Single RGB Module)


Wattage CCT	50W
RGB	1930 lm

*Tolerance ± 8%


Dimensions

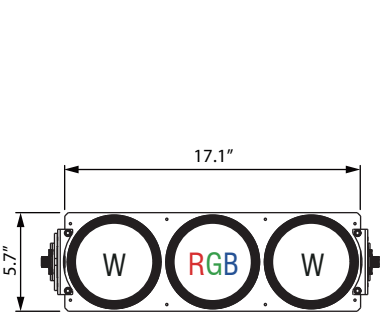

200W / 3 Modules

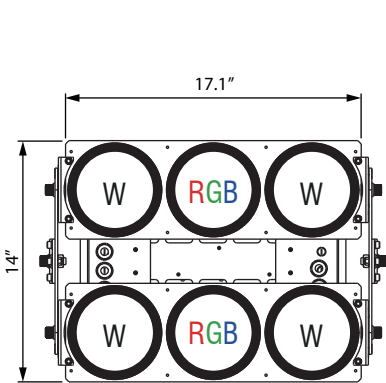


400W / 6 Modules

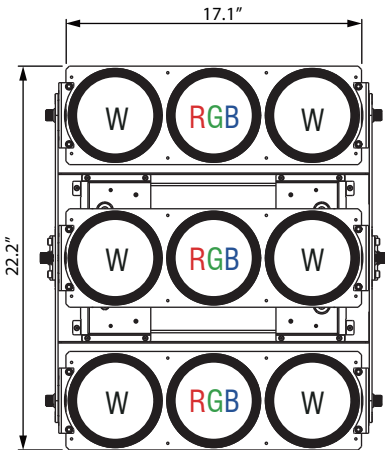


600W / 9 Modules


Mounting Options

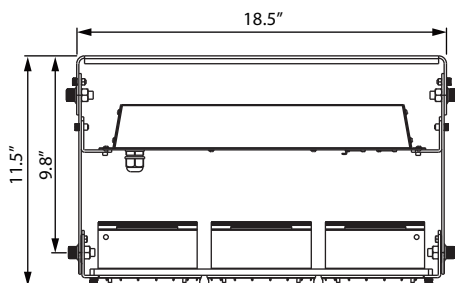




Bracket Mount / 3 Modules

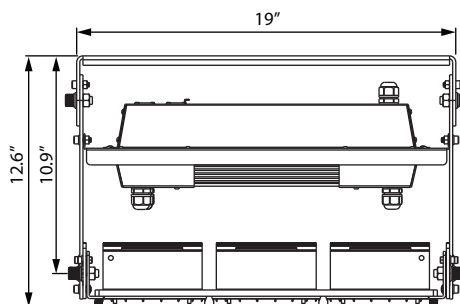

Bracket Mount / 6 Modules


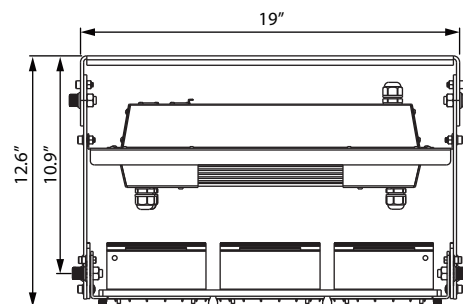


Bracket Mount / 9 Modules








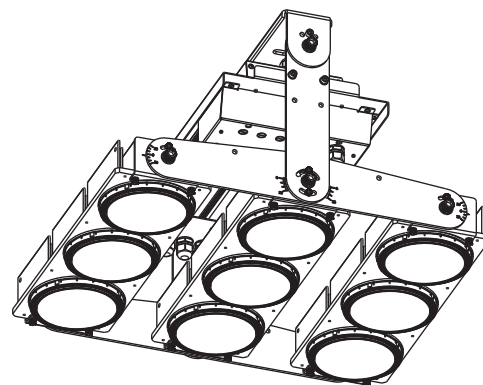
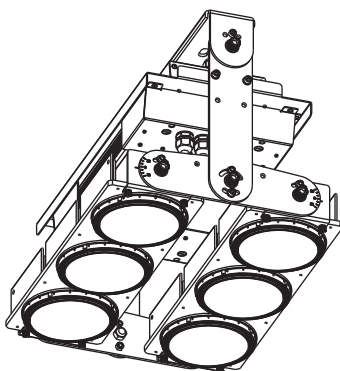



Accessory

Glare Shield Baffle



Glare Shield Visor

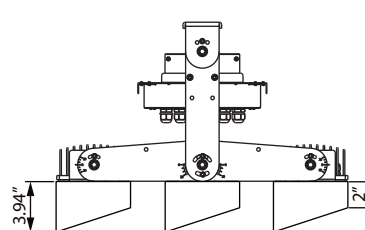

DMX Requirements*

The Tetriss 2.0 W+RGB fixture with DMX is a FOUR CHANNELS DMX unit.

When placing order, please indicate DMX address. (The DMX address will be listed on the back of the fixture.)

The LED fixture provide XLR socket to connect. (DMX cable NOT included.)


The final fixture should be terminated by the use of DMX Terminator (by others).

Fixture	DMX Address			
	Red Control (ex. X)	Green Control (ex. X+1)	Blue Control (ex. X+2)	White Control (ex. X+3)
#1	1	2	3	4
#2	5	6	7	8
#3	9	10	11	12

The LED fixture provide XLR socket to connect. (DMX cable NOT included.)

The final fixture should be terminated by the use of DMX Terminator (by others).

XLR Sockets



CONNECTION	5-PIN XLR
Common	PIN 1
Signal -	PIN 2
Signal +	PIN 3
Spare	PIN 4
Spare	PIN 5