

ADVANCED HIGH CEILING

Whiz - Standard**METEOR**

High lumen compact luminaire with lumen output 8316 – 33475lm. Additional features include IP65 and outdoor/natatorium rating.

- Outdoor/Natatorium Rating

(Please refer to Outdoor/Natatorium Version spec sheet)



Quantity		Type	
Project		Note	

Electrical System

- 9975lm (90W)
- 14280lm (130W)
- 28737lm (240W)
- 33475lm (300W)
- Power Input: Universal (120-277V); 347-480V
- Operating Temperature: -40°F~112°F
- Surge Protection: 10KV
- Remote Emergency Pack (Bodine BSL20W)
- *Emergency option is only available with standard 0-10V (STV).

LED Technology

- 3000K, 4000K, 5000K
- 75 CRI, 85 CRI, 93 CRI
- Beam Angle: 15°, 30°, 60° and 100° (with diffuser)
- Rated Life > 100,000 hours (L70)
- Lumen Maintenance > 0.90 at 60,000 hours

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- **Standard 0-10V:** dims to 10%
- **Superior 0-10V:** dims to 1%
- **DMX:** high resolution dims to 0.1%
- **ECOsystem:** dims to 10% (UNV only)
- **DALI:** dims to 10%

Housing

- Diameter: 15.07" (383mm) x 14.17" (360mm)
- Height: WS-90 / WS-130: 3.54" (90mm)
WS-240 WS-300: 4.6" (117mm)
- Material: Die-Cast Aluminum, Tempered Glass
- Weight: 29.5lbs (With Power Supply / Standard 0-10V)

Mounting

- Surface Mount
- Stem 2ft, 4ft
- Adjustable Aircraft Cable 4ft, 8ft, 10ft
- Uplight Stem 2ft or 4ft

Warranty

- 5 years limited warranty.

Listing

- UL Damp Location Listed
- UL924
- DLC Listed
- FCC
- CE



Not all Whiz are DLC qualified.
For all qualified products.
Please visit: www.designlights.org/qpl

Whiz - Standard**How To Specify:****Ordering Example: WS-240-507-UNV-STV-60-WHT-ST2****4-5 weeks lead time on over 75% of specifications.**

Model	Wattage	CCT / CRI	Voltage	Dimming
WS				
WS	90 90W	308 3000K / CRI85	UNV 120-277V	NOD Non-Dimming
Whiz	130 130W	408 4000K / CRI85	HVT 347-480V	STV Standard 0-10V dims to 10%
	240 240W	507 5000K / CRI75	277 277V	SPV ¹ Superior 0-10V dims to 1%
	300 300W	309 3000K / CRI93		DMX ¹ DMX dims to 0.1% (XLR Sockets)
				ECO ^{1,2} LUTRON ECOSystem dims to 10%
				DALI ¹ DALI dims to 10%

¹ Option is not compatible with **OCC**.² 240W, 300W ECO Option is only compatible with **277V**.

Beam Angle	Finish	Mounting	Accessories
15 15°	BLK Black	SUM Surface Mount	OCC ¹ Occupancy Sensor
30 30°	WHT White	ST2 Stem 2ft	EMP Remote Emergency Pack
60 60°		ST4 Stem 4ft	DF ² Diffuser
WD* 100° (with diffuser)		AD4 Adjustable Cable 4ft	WG ³ Wire Guard
		AD8 Adjustable Cable 8ft	
		AD10 Adjustable Cable 10ft	
		UP2* Uplight Stem 2ft	
		UP4* Uplight Stem 4ft	

*Please factor in change in lumen output with diffuser (-20% with WD; -12% with other degrees).

*Option is not compatible with **DMX and OCC**. Stem length is required when placing order.

¹ Option is ONLY compatible with NOD, MUST order with Wire Guard.

² Please factor in change in lumen output with diffuser (-20% with WD; -12% with other degrees).

³ Please factor in change in lumen output of -14%.

DesignLights Consortium™ Qualified Luminaires:

DLC QPL Model Number : WS-130-57K, WS-240-50K, WS-300-50K

Not all product variations listed on this page are DLC qualified.

To ensure that a specific model is qualified, visit www.designlights.org/search.

ADVANCED HIGH CEILING
Whiz - Standard



Delivered Lumens*


*Tolerance ± 8%

Wattage	90W	130W	240W	300W	
	Beam Angle: 15°				
CCT	5000K	9975 lm	14280 lm	28737 lm	33475 lm
	4000K	8393 lm	12204 lm	24075 lm	28034 lm
	3000K	8316 lm	12091 lm	22680 lm	26215 lm

Current Consumption


Wattage	Volt	120V	277V
90W		0.83A	0.36A
130W		1.19A	0.52A
240W		2.20A	0.95A
300W		2.75A	1.19A

Dimensions

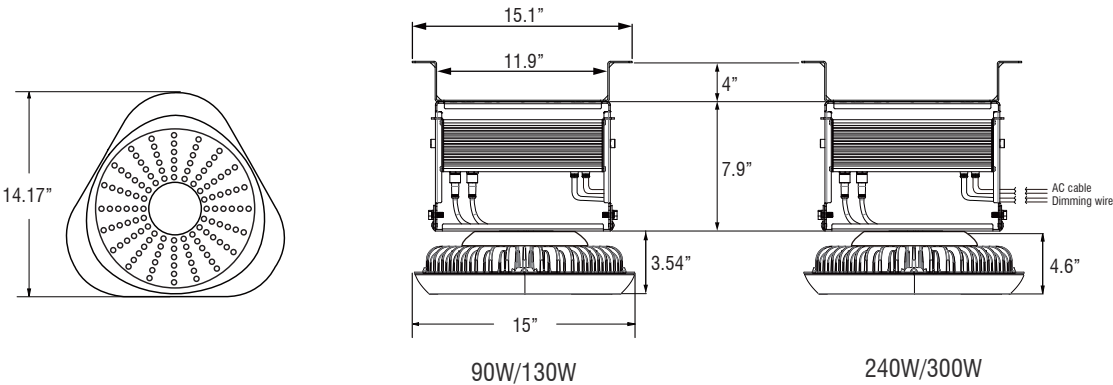


Mounting Options (STV with 1 Power box)

(AC / Dimming cable: standard length is 6ft)

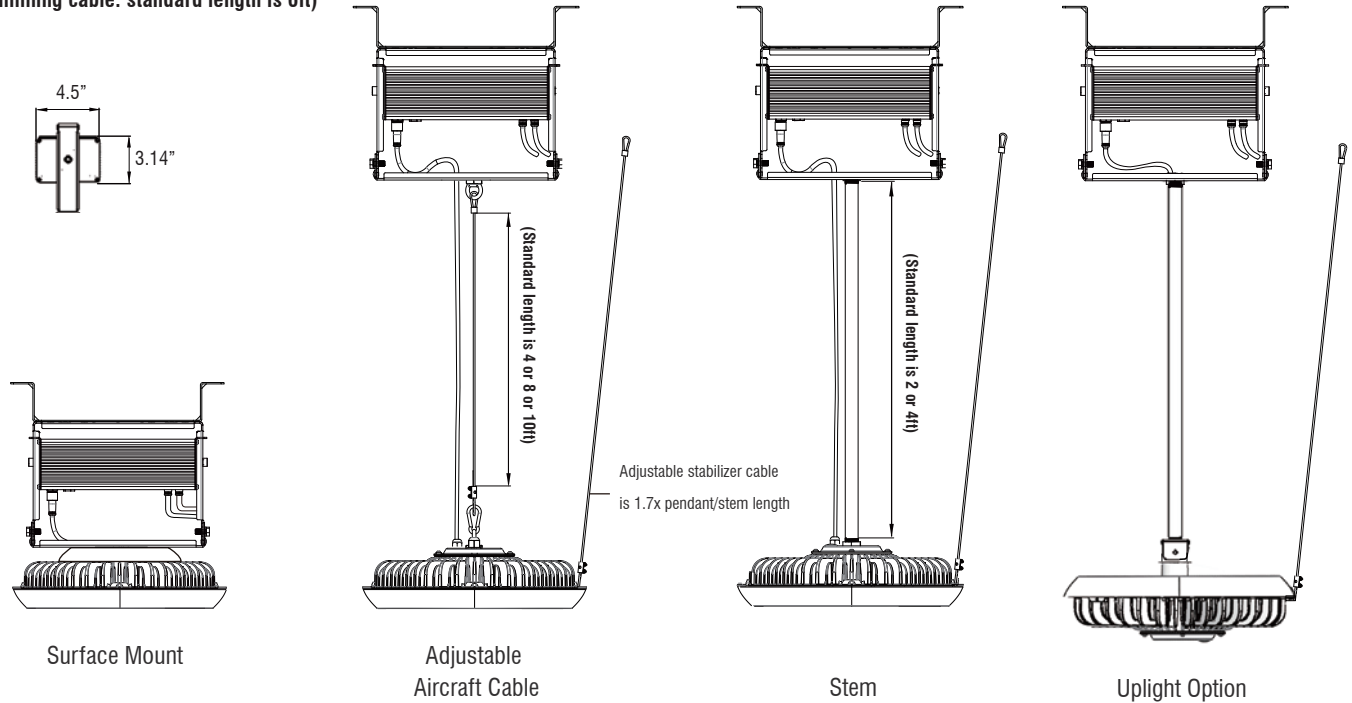

Mounting Options - SPV, DMX, DALI, ECOsystem with 2 power boxes)

(AC / Dimming cable: standard length is 6ft)

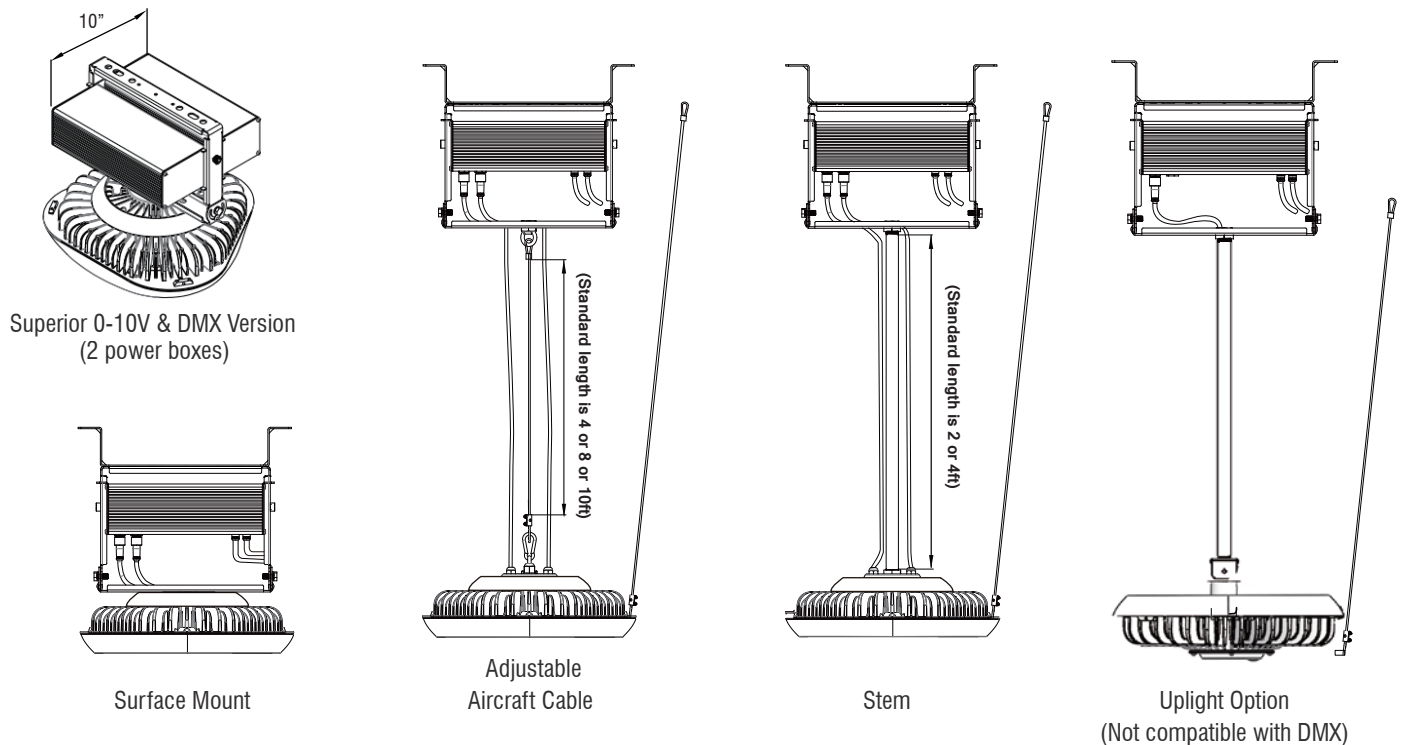

Whiz - Standard**DMX Requirements***


The Whiz LED fixture with DMX is a ONE CHANNEL DMX unit.

When placing order, please indicate DMX address. (The DMX address will be listed on the back of the fixture)

The LED fixture comes equipped with male and female 5-Pin XLR Receptacles. (DMX cable NOT included)



Power Box for Whiz




XLR Socket



CONNECTION	5-PIN XLR
Common	PIN 1
Signal -	PIN 2
Signal +	PIN 3
Spare	PIN 4
Spare	PIN 5

Occupancy Sensor

* Not available with any dimming option.



Occupancy Sensor

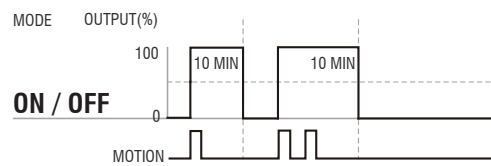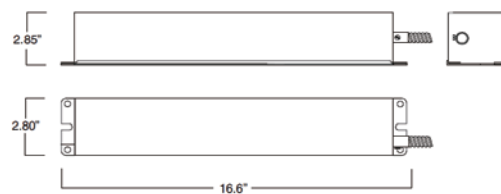Occupancy Sensor Operation**Wire Guard****Remote Emergency Pack****Emergency Pack Lumen Output Table**

CCT	3000K	4000K	5000K
Lumen	1800 lm	1850 lm	2200 lm

