

ADVANCED HIGH CEILING

# Zeta 10 - W+RGB



10-inch aperture Cylinder utilizing Meteor Lighting's proprietary ColorFlip™ W + RGB solution, that gives you True White light and unlimited RGB possibilities. This product is compatible with all DMX control systems and follows ANSI E1.20 RDM protocol. You can now get white and RGB colors all from a single light source.



Quantity	Type
Project	Note

## Electrical System

- 50W / W=25W, RGB=25W
- 100W / W=50W, RGB=50W
- Power Input: Universal (120-277V)
- Operating Temperature: -13°F~112°F
- Surge Protection: 4KV

## LED Technology

- White: CCT 3000K
- 85 CRI
- Beam Angle: 45°, 55°
- Rated Life > 60,000 hours (L70)

## Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- **DMX:** high resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

## Housing

- Diameter: 9.4" (238mm)
- Height: 18.6" (474mm)
- Material: Aluminum
- Weight: 25 lbs
- Trim Finish Options

## Mounting

- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Adjustable Aircraft Cable 10ft

## Warranty

- 5 years limited warranty.

## Listing

- ETL Damp Location Listed
- FCC
- CE



# Zeta 10 - W+RGB





## How To Specify:

**Ordering Example: ZS10-100-308C-U-DMX-45-B-2-ST2**

**4-5 weeks lead time on over 75% of specifications.**

Model	Wattage	CCT / CRI	Voltage	Dimming
ZS10		WDIM	U	
ZS10	<b>50</b> 50W	<b>308C</b> 3000K / CRI85+RGB	<b>U</b> 120-277V	<b>DMX</b> DMX dims to 0.1% (XLR Sockets)
Zeta 10	<b>100</b> 100W			<b>DMX(RJ45)</b> DMX dims to 0.1% (RJ45 Sockets)

Beam Angle	Finish	Trim Finish	Mounting	Accessories
<b>45</b> 45°	<b>BLK</b> Black	<b>1</b> Copper Color Trim	<b>ST2</b> Stem 2ft	<b>SPD<sup>1</sup></b> Surge Protector
<b>55</b> 55°	<b>WHT</b> White	<b>2</b> Gold Color Trim	<b>ST4</b> Stem 4ft	
		<b>3</b> Silver Color Trim	<b>AD10</b> Adjustable Cable 10ft	
		<b>4</b> White Color Trim		
		<b>5</b> Black Color Trim		
				
				
		1 2 3 4 5		

<sup>1</sup>Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machinery.

# Zeta 10 - W+RGB



## Delivered Lumens\*


CCT \ Wattage	50W		100W	
	Beam Angle: 45°			
R	8 W	149 lm	17 W	220 lm
G	8 W	988 lm	17 W	1702 lm
B	8 W	117 lm	17 W	209 lm
W	25 W	2000 lm	50 W	4016 lm

## Current Consumption


Wattage \ Volt	120V	277V
50W	0.44A	0.19A
100W	0.89A	0.38A

\*Tolerance±8%

## Dimensions



## Mounting Options

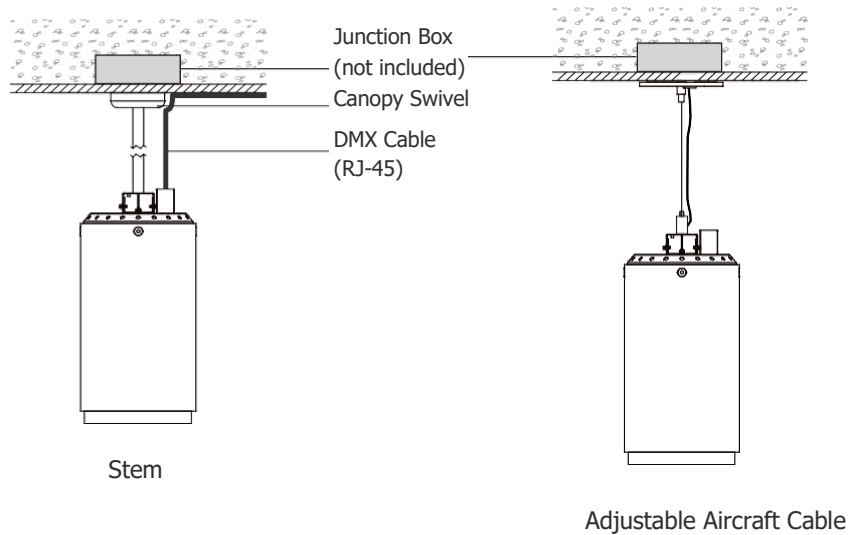

# Zeta 10 - W+RGB



## DMX Requirements

The Zeta 10 LED fixture with DMX is a FOUR CHANNEL DMX unit.

When placing order, please indicate DMX address. (The DMX address will be listed on the back of the fixture.)


The LED fixture provide RJ45 Socket or XLR socket to connect. (DMX cable NOT included.)

Fixture	DMX Address			
	Red Control (ex. X)	Green Control (ex. X+1)	Blue Control (ex. X+2)	White Control (ex. X+3)
#1	1	2	3	4
#2	5	6	7	8
#3	9	10	11	12


The LED fixture provide RJ45 Socket or XLR socket to connect. (DMX cable NOT included.)

The final fixture should be terminated by the use of DMX Terminator (by others).


### RJ45 Sockets




### XLR Sockets



CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN(PIN 8)	PIN 1
Signal -	ORANGE(PIN 2)	PIN 2
Signal+	WHITE/ORANGE(PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5



Connect DMX by using a standard shielded CAT5/6 cable.



Connect DMX by using a standard DMX512 XLR cable with 5 pin in/out connector (by others).