

**Housing**

12.3" x 12.3" x 67" | Weight : 85 lbs

**Material**

Housing: Cast Aluminum

**Mounting**

Surface Mounted



Embedded

**Charging Type**

Level 2 Charging (40A/220V, Single Phase)

**Charging Load**

8.8kW (35 Miles per Hour)

**Charging Connector**

SAE J1772 Type 1

**Charging Cable Length**

25ft

**Connectivity**

LTE Cat. 1

**Warranty**

3 Year Limited Warranty

**Listing**

## Standalone EV Charging Pole

Meteor CL-P, a standalone pole designed for outdoor applications requiring efficient EV charging while providing a seamless visual match with our other units.

Equipped with Level II EV chargers offering 40A capacity and up to 35 miles of range per hour.

With LTE connectivity and app-free, scan-and-charge functionality, it ensures user convenience.



## SPECIFICATION SHEET

**CL-P** STANDALONE  
EV CHARGING POLE**METEOR**

## SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

<b>CL-P</b>	MODEL	<b>CL-P</b> Outdoor Pole with integrated EV Charger
	MOUNTING	<b>AKE</b> Embedded <b>AKS</b> Surface Mounted

## EV-CHARGER

	TYPE	<b>40AS</b> 40A Level 2 Single Charger <b>40AD</b> 40A Level 2 Dual Charger
<b>LTE</b>	CONNECTIVITY	<b>LTE</b> 4G Connectivity
	MAINTENANCE SERVICE	<b>NO</b> No Maintenance Service <b>1Y</b> 1 Year <b>2Y</b> 2 Years <b>3Y</b> 3 Years

 CLEAR FORM

## SPECIFICATION SHEET

**CL-P** STANDALONE  
EV CHARGING POLE

**METEOR**

### TECHNICAL DETAILS

#### Electrical

- Power Input: 220-240 VAC, Single Phase, 60Hz
- Max Input / Output Current: 40A
- Operating Temperature: -22°F~122°F
- Wiring Type: Hard-wired
- Protection: Over Voltage, Under Voltage, Surge Protection, GM/I, CCID20, Over Current, Over Temperature, Short Circuit, Relay Malfunction

#### EV Charger Features

- Charging Type: Level 2 Charging
- Charging Load: 8.8kW (35 Miles per Hour)
- Charger Connector: SAE J1772 Type 1
- Charger Cable Length: 25ft
- Display: 5\*8 Dot Matrix
- Indications: LED with multiple colors (RGB)

#### Communication

- 4G LTE
- Data Protocol: OCPP 1.6J

#### Housing

- Size: 12.3" x 12.3" x 67"
- Weight : 85 lbs
- Material: Polycarbonate

#### Warranty

- 3-year limited warranty

#### Meteor Software Maintenance Service

- 1 - 3 Year management plan
- Software Provider: Wevo
- Real time analytics & reporting
- Station Management and remote trouble shooting
- Revenue Collection & Direct Deposit
- Advanced load management
- Driver RFID card access

#### Listing

- UL 1998/2231/2594
- FCC
- IP65
- IK10

### PERFORMANCE SUMMARY


EV Charger Current Consumption		
WATTAGE / VOLT	220V	240V
8.8kW	48A	36.6A

## SPECIFICATION SHEET

**CL-P** STANDALONE  
EV CHARGING POLE

**METEOR**

## DIMENSIONS

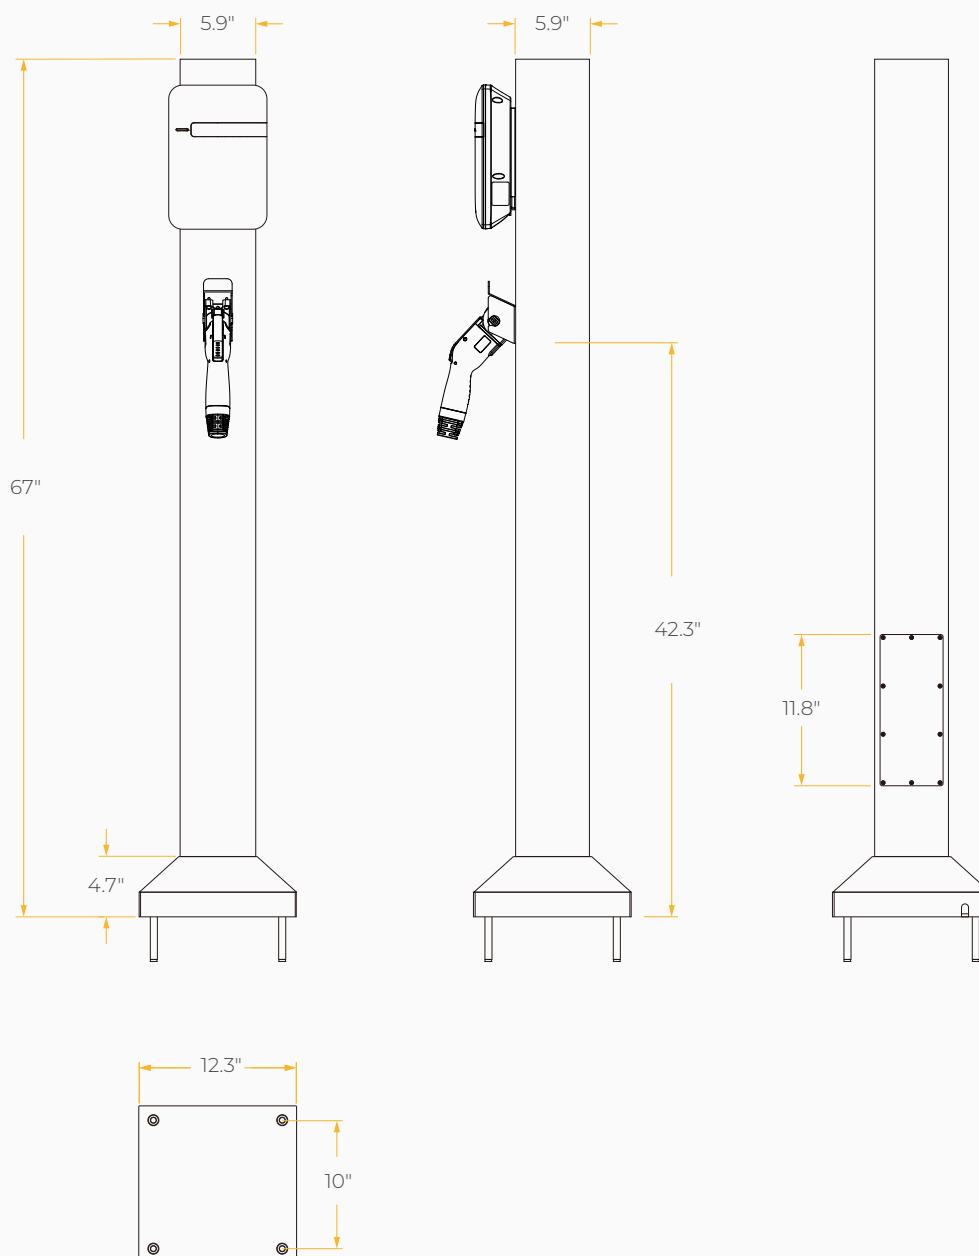


## SPECIFICATION SHEET

**CL-P** STANDALONE  
EV CHARGING POLE

**METEOR**

## DIMENSIONS

Charger Console



Charger Handle  
SAE J1772 Type 1

