

DUO 4

ELEGANT 4 INCH UP AND DOWN LUMINAIRE

Housing

Diameter : Ø4.8" | Height : 15.1" | Weight : 8.5 lbs

Material

Housing: Extruded Aluminum

Lens: Clear polycarbonate

Power Input

Downlight: 15W, 25W, 50W | 120-277V

Uplight: 15W, 25W | 120-277V

Lumen Output

Downlight: 1,500 lm (15W), 2,205 lm (25W), 4,305 lm (50W)

Uplight: 1,500 lm (15W), 2,205 lm (25W)

Dimming

TRC: Linear line-voltage phase control, dims to 1%

LDE1: Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black

Superior 0-10V: Dims to 1%

DMX: High resolution dims to 0.1% (RJ45 only)

(Supports ANSI E1.20 RDM protocol)

Color Quality

CRI 85, CRI 93 | UGR ≤ 19

Rated Life

> 100,000 Hours (L70)

Finish



Black

White

Color Temperature



2700K

3000K

3500K

4000K

Optics



15°
DOWN

25°
DOWN

35°
UP/DOWN

60°
UP/DOWN

Wide
UP/DOWN

Mounting



Power Line



Power Line
Remote Power

Warranty

5 Year limited warranty

Listing




METEOR

SPECIFICATION SHEET

Revolutionary Mounting System

Perfect for highlighting beautiful ceiling spaces, the embedded Powerline™ System offers a highly aesthetic fixture, with a less than 1-inch canopy option for that truly quiet ceiling design.

Available in a range of dimming capabilities including DMX, this added technology does not compromise the look and feel of the luminaire and is done through a hidden signal wire that can also offer separate uplight and downlight dimming controls.

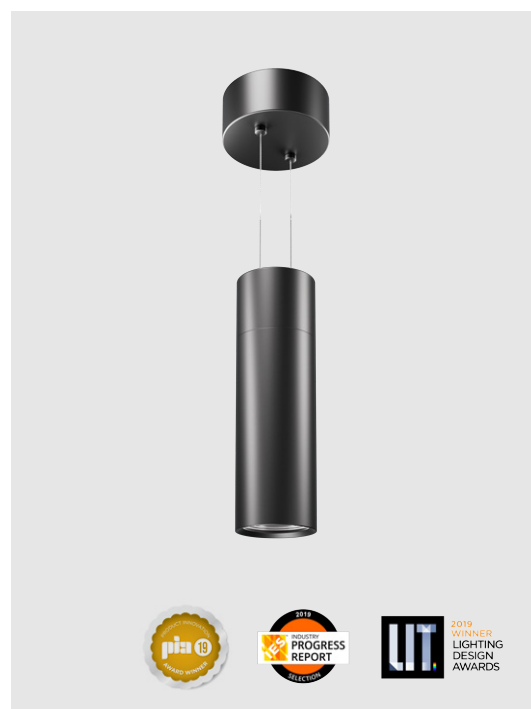

meteor-lighting.com

SPECIFICATION SHEET

DUO 4 ELEGANT 4 INCH
UP AND DOWN LUMINAIRE

METEOR

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

<input type="text"/>	MODEL	DUO 4		
<input type="text"/>	WATTAGE	30 Downlight: 15W Uplight: 15W	50 Downlight: 25W Uplight: 25W	75 Downlight: 50W Uplight: 25W
<input type="text"/>	CCT / CRI	278 2700K / CRI 85 309 3000K / CRI 93 408 4000K / CRI 85	279 2700K / CRI 93 358 3500K / CRI 85	308 3000K / CRI 85 359 3500K / CRI 93
<input type="text"/>	VOLTAGE	UNV 120 – 277V		
<input type="text"/>	DIMMING	<div>Without Signal Wire</div> <div> NOD Non-Dimming TRC¹ Linear line-voltage phase control, dims to 1% LDE1² Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black </div> <div>With Signal Wire</div> <div> SPVS Superior 0-10V dims to 1% Single (Up/Down Together) SPVD Superior 0-10V dims to 1% Dual (Up/Down Separately) DMXRS³ DMX dims to 0.1% Single (Up/Down Together) DMXRD³ DMX dims to 0.1% Dual (Up/Down Separately) </div>		
<input type="text"/>	BEAM ANGLE	<div>Downlight</div> <div> 15 15° 25 25° 35 35° 60 60° WD⁴ Wide </div> <div>Uplight</div> <div> 35 35° 60 60° WD⁴ Wide </div>		
<input type="text"/>	FINISH	BLK Black WHT White		
<input type="text"/>	MOUNTING	PL2 (2 / 4 / 6 / 8 / 10) Power Line Mount (2, 4, 6, 8, and 10 ft.) PL2RM (2 / 4 / 6 / 8 / 10) Power Line Mount with Remote Power (2, 4, 6, 8, and 10 ft.)		
<input type="text"/>	ACCESSORIES	EMP Remote Emergency Pack		

¹ Option is only compatible with 120V and 30W² Option is only compatible with 30W, 50W³ Option only applies to RJ45 Sockets⁴ Please factor in change in lumen output of -20% with WD

TECHNICAL DETAILS

Electrical

- Downlight: 1,500 lm (15W), 2,205 lm (25W), 4,305 lm (50W)
- Uplight: 1,500 lm (15W), 2,205 lm (25W)
- Power Input: Universal (120-277V)
- Operating Temperature: -13°F~104°F
- Surge Protection: Built-in is 2.5KV
- Power Factor Greater than 0.9
- Remote Emergency Pack: Bodine BSL20B2UEK55C111

LED Features

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- CRI 85, CRI 93
- UGR ≤ 19
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

Optics

- Precision molded high transmittance clear lenses
- Beam Angle Down: 15°, 25°, 35°, 60°, WD
- Beam Angle Up: 35°, 60°, WD

Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting

Without Signal Wire

- TRC: Linear line-voltage phase control, dims to 1% (120V only)
- LDE1: Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black

With Signal Wire

- Superior 0-10V: dims to 1%
Single Dimming (Controls Up/Down Together)
Dual Dimming (Controls Up/Down Separately)
- DMX: High resolution dims to 0.1% (RJ45 only)
(Supports ANSI E1.20 RDM protocol)
Single Dimming (Controls Up/Down Together)
Dual Dimming (Controls Up/Down Separately)

Housing

- Diameter: Ø4.8"
- Height: 15.1"
- Material: Extruded Aluminum
- Weight: 8.5 lbs
- Canopy Height: 2.95"

Mounting

- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft (Canopy Height: 2.95")
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft with Remote Power (Canopy Height: 0.84")

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE
- FCC

SPECIFICATION SHEET

DUO 4

ELEGANT 4 INCH
UP AND DOWN LUMINAIRE

METEOR

PERFORMANCE SUMMARY*

Delivered Lumens				
CCT/WATTAGE	2700K	3000K	3500K	4000K
30W UP (15W)	1,340lm	1,380lm	1,460lm	1,500lm
30W DOWN (15W)	1,340lm	1,380lm	1,460lm	1,500lm
50W UP (25W)	1,990lm	2,060lm	2,180lm	2,205lm
50W DOWN (25W)	1,990lm	2,060lm	2,180lm	2,205lm
75W UP (25W)	1,990lm	2,060lm	2,180lm	2,205lm
75W DOWN (50W)	3,720lm	3,980lm	4,210lm	4,305lm

Current Consumption		
WATTAGE / VOLT	120V	277V
30W	0.28A	0.12A
50W	0.46A	0.20A
75W	0.69A	0.30A


*Tolerance $\pm 8\%$

* For specifications requiring a CRI of 93, apply a 0.75 multiplier to the lumen output values listed.


PHOTOMETRICS

Below is a typical photometric representation of the Duo 4 fixture. Please download IES files to ensure exact photometric value.


Downlight:




15°




25°



35°




60°




WIDE


Uplight:



35°



60°



WIDE

SPECIFICATION SHEET

DUO 4 ELEGANT 4 INCH
UP AND DOWN LUMINAIRE

METEOR


DMX REQUIREMENTS

The Duo 4 fixture with DMX unit has **two channels** per fixture (1 to control uplight, 1 to control downlight). When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

DMX Address		
Fixture	Uplight (ex. X)	Downlight (ex. X+1)
#1	1	2
#2	3	4
#3	5	6

The fixture can be connected with RJ45 sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

CONNECTION	RJ45 (CAT5e)
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)
Signal -	ORANGE (PIN 2)
Signal +	WHITE/ORANGE (PIN 1)
Spare	-
Spare	-



COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 for DMX installation. Belden 9729 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.

COMPATIBLE TRC DIMMER LIST

PART NO.					
Lutron S-603PG	Lutron DVCL-153P	Lutron DVLV-600P	Lutron TGCL-153P	Lutron S-600P	Lutron DVELV-303P
Lutron SELV-300P	Lutron TG-600P	Lutron DVLV-600P	Lutron LG-600P	Lutron CT-103P	Lutron MAELV-600
Lutron FAELV-500	Leviton IPI06-1LZ	Leviton 6631-2	Leviton VPE06	Leviton 6683-IW	Leviton 6161
Leviton 6633-P	Leviton IPE04	Cooper DLC03P	Cooper SLC03P	Cooper DAL06P	Lightolier ZP260QEW

SPECIFICATION SHEET

DUO 4 ELEGANT 4 INCH UP AND DOWN LUMINAIRE


METEOR

COMPATIBLE LDE1 DIMMER LIST


LUTRON PART NO.						
RMJ-ECO32-DV-B	FCJ/FCJS-ECO	QSN-1ECO-S	QSN-2ECO-S	QSGRJ-_E	QSGR-_E	QP2-_ _ 2C
QP2-_ _ 4C	QP2-_ _ 6C	QP2-_ _ 8C	LQSE-2ECO-D			

DIMENSIONS


SPV / DMX
with signal wire

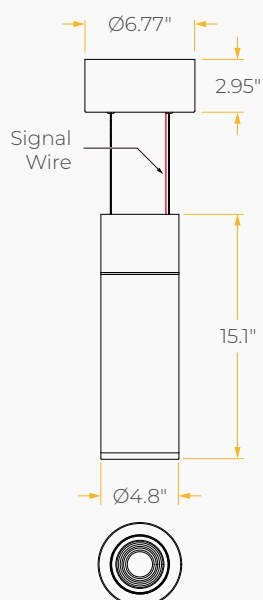


NON / TRC / ECO
without signal wire

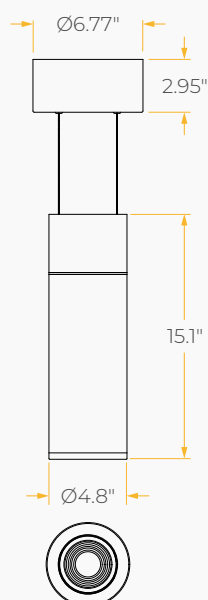

With Remote Power
(Remoted length can be 50ft max)



Remote Emergency Pack

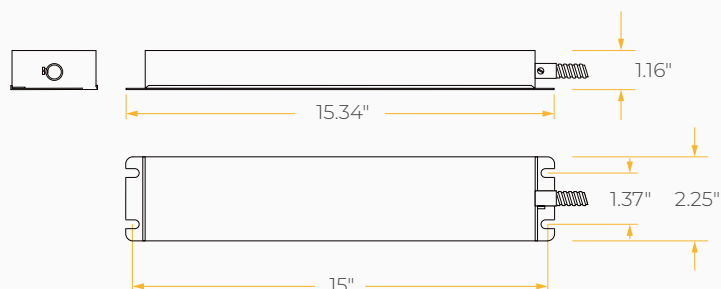

SPECIFICATION SHEET


DUO 4 ELEGANT 4 INCH
UP AND DOWN LUMINAIRE

METEOR

MOUNTING OPTIONS*

**Junction Box not included*

**Power Line Mount with
High Lumen Power Suspension**

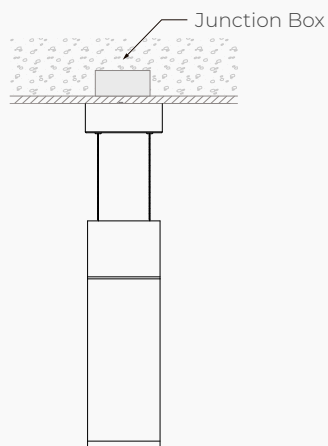

**Power Line Mount with High Lumen
Power Suspension and Remote Power**

