

# REV FLEX 2

SPECIFICATION SHEET  
NEW CONSTRUCTION - W+RGB

## REVOLUTIONARY ADJUSTABLE DOWNLIGHTS

### Housing

Aperture : Ø2.6" | Height : 7" | Weight : 2.2 lbs  
Maximum Ceiling Thickness : 1" | Ceiling Cutout : 2.9"

### Material

Housing: High Pressure Die-Cast Aluminum  
Optics: Aluminum Reflector

### Power Input

15W (W=4.5W, RGB=9W) , 20W (W=9W, RGB=9W) | 120V, 277V

### Lumen Output

375 lm (15W)  
570 lm (20W)

### Dimming

DMX : High resolution dims to 0.1%, dims to off

### Color Quality

CRI 85

### Rated Life

> 100,000 Hours (L70)

### Bezel Finish



Matte  
Black



Matte  
White



Matte  
Silver

### Trim Finish



Matte  
Black



Matte  
White

### Color Temperature



+



ColorFlip™ W+RGB

3000K

### Optics



40°



55°

### Adjustability



0°-30°  
Tilt



0°-359°  
Rotation

### Warranty

5 Year limited warranty

### Listing



## Quiet . Adjustable. Color Changing.

The new REV Flex series is an extension of Meteor's revolutionary downlights with an adjustable factor. Coming in a range of 2", 4" and 6" apertures. The REV Flex series feature 359° rotation, 30° tilt, and a variety of architectural illumination options.

All REV Flex configurations are Title 24 listed, and compatible with our proprietary high efficacy ColorFlip™ color changing technology W+RGB. Also features built-in Flicker-Free video recording with our VX™ Driver.



# METEOR

[meteor-lighting.com](https://meteor-lighting.com)

## SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

RF2N	MODEL	REV FLEX 2 WITH NEW CONSTRUCTION FRAME		
	WATTAGE	15 15W	20 20W	
A	BEZEL TYPE	A Adjustable Bezel		
308C	CCT / CRI	308C 3000K / CRI 85 + RGB		
	VOLTAGE	120 120V	277 277V	
	DIMMING	DMXP <sup>1</sup> DMX dims to 0.1% (Phoenix Connector)	DMXR <sup>1</sup> DMX dims to 0.1% (RJ45 Sockets)	
	TRIM TYPE	R Round SF <sup>2</sup> Square Flangeless	S Square	RF <sup>2</sup> Round Flangeless
	TRIM FINISH	BLK Matte Black	WHT Matte White	
	BEZEL FINISH	BLK Matte Black	WHT Matte White	SLV Matte Silver
	BEAM ANGLE	40 40°	55 55°	
	ACCESSORIES	NO No Accessories	HC <sup>3</sup> Hex Cell Louver	

<sup>1</sup> DMXP and DMXR options does not have below ceiling access<sup>2</sup> Flangeless trims are always white in color<sup>3</sup> Please factor in change in lumen output of -25%

**TECHNICAL DETAILS****Electrical**

- 375 lm (15W)
- 570 lm (20W)
- Power Input: Universal (120-277V)
- Operating Temperature: 14°F~104°F

**LED Features**

- Color Temperature : 3000K + RGB
- CRI 85
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

**Optics**

- Precision molded high transmittance clear PC lens
- Beam Angle: 40°, 55°

**Advanced Dimming**

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol), dim to off

**Housing**

- Aperture : Ø2.6"
- Height : 7"
- Weight : 2.2 lbs
- Ceiling Cutout : 2.9"
- Maximum Ceiling Thickness : 1"
- Material: High Pressure Die-Cast Aluminum, Aluminum Reflector
- Non-IC Rated, insulation must be kept >0.5ft from housing
- Light engine, optics, and driver(s) accessible from below ceiling, except DMX

\*Note: C-Channel / Mounting Channels / T-Bar Hangers are purchased from a third party

**Warranty**

- 5-year limited warranty

**Listing**

- ETL
- CE
- FCC
- JA8 Title 24 Compliant

**PERFORMANCE SUMMARY\***


Standard				
CCT/WATTAGE	R	G	B	W
15W	3W	3W	3W	4.5W
	25lm	135lm	20lm	195lm
20W	3W	3W	3W	9W
	25lm	140lm	15lm	390lm

Current Consumption		
WATTAGE / VOLT	120V	277V
15W	0.13A	0.06A
20W	0.17A	0.07A

\*Beam Angle: 40° \*Tolerance ±8%

**PHOTOMETRICS**

Below is a typical photometric representation of the Rev Flex 2 fixture. Please download IES files to ensure exact photometric value.

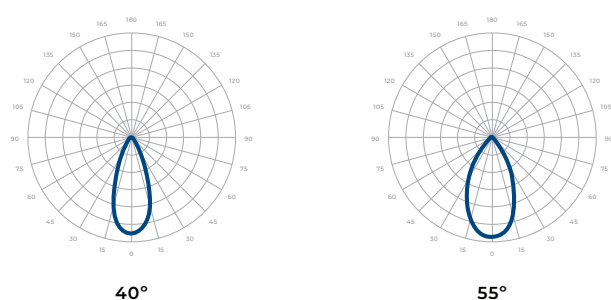

## DMX REQUIREMENTS

The Rev Flex 2 LED W+RGB fixture with DMX is a **four channel dmx** unit.

When placing order, please indicate DMX address (refer to DMX Address example below).

The DMX address will be listed on the back of the fixture.

DMX Address				
Fixture	Red Control (ex. X)	Green Control (ex. X+1)	Blue Control (ex. X+2)	White Control (ex. X+3)
#1	1	2	3	4
#2	5	6	7	8
#3	9	10	11	12



The LED fixture provide RJ45 Socket or Phoenix Connector to connect. (DMX cable **not** included.)

The final fixture should be terminated by the use of DMX Terminator (by others).

CONNECTION	RJ45 (CAT5e)
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)
Signal -	ORANGE (PIN 2)
Signal +	WHITE/ORANGE (PIN 1)
Spare	-
Spare	-



**DO NOT MIX THE RJ45 DC POWER OUTPUT WITH THE DMX SIGNAL, AS IT MAY LEAD TO EQUIPMENT DAMAGE OR MALFUNCTION.**

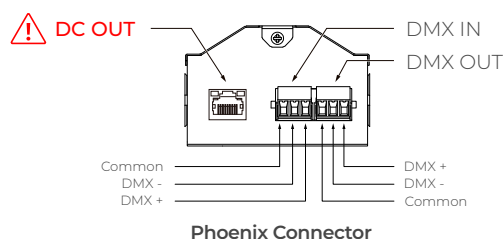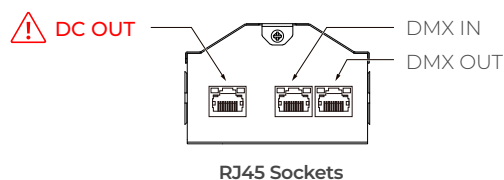

## COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a shielded twisted pair cable, which allows for a spare pair for 'out and back' type terminations if needed.


## TRIM TYPES




Round Trim



Round Flangeless Trim




Square Trim




Square Flangeless Trim

## DIMENSIONS


Round Trim Cutout

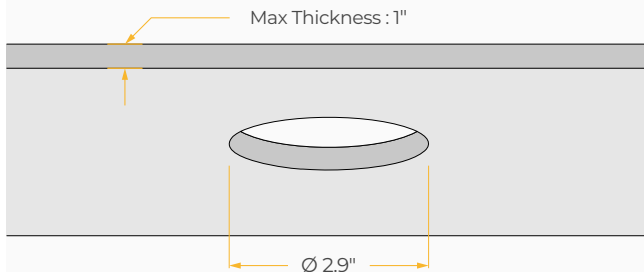


Square Trim Cutout

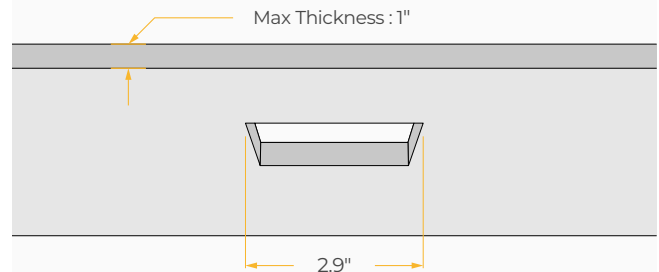


Round Trim

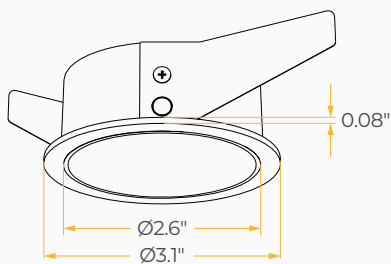


Round Flangeless Trim

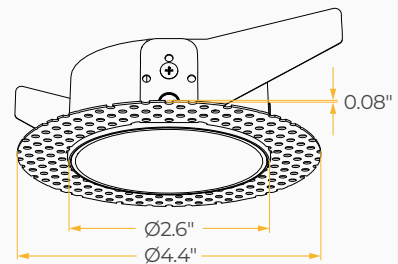

Round Trim

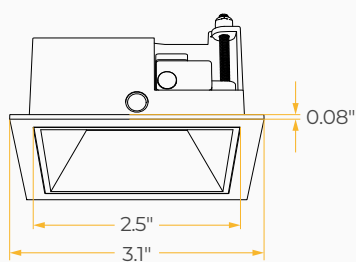


Round Flangeless Trim

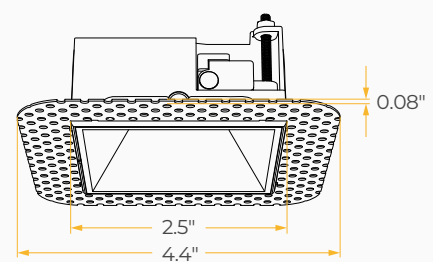

## DIMENSIONS

DMX/DMXR

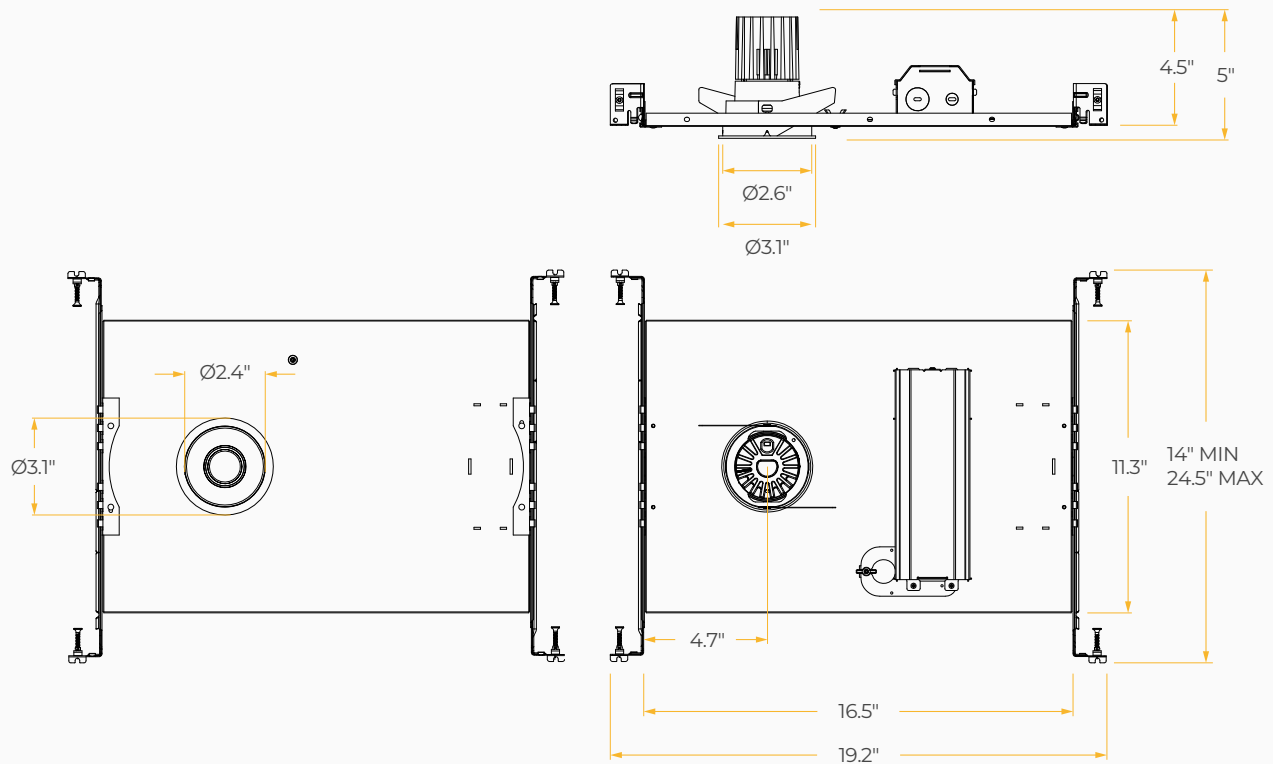

Power Box (DMX/DMXR)

