

## **IMPORTANT SAFETY INFORMATION**

**READ AND FOLLOW ALL SAFETY INSTRUCTIONS**


---

**FOR FIELD ASSISTANCE PLEASE CALL  
+1-213-255-2060 #4**


---

- Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker.
- All servicing or relamping must be performed by qualified service personnel.
- Product must be grounded to avoid potential electric shock or other potential hazard.
- Product must be installed at locations and heights, in a manner consistent with its intended use, and in compliance with electrical code and local codes.

**SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE**

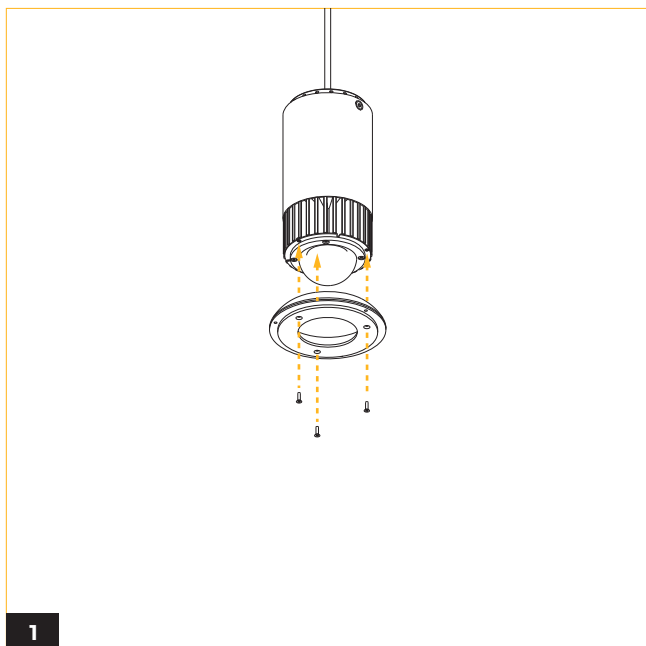


1 Fasten Shroud Mounting plate using three phillips screws.

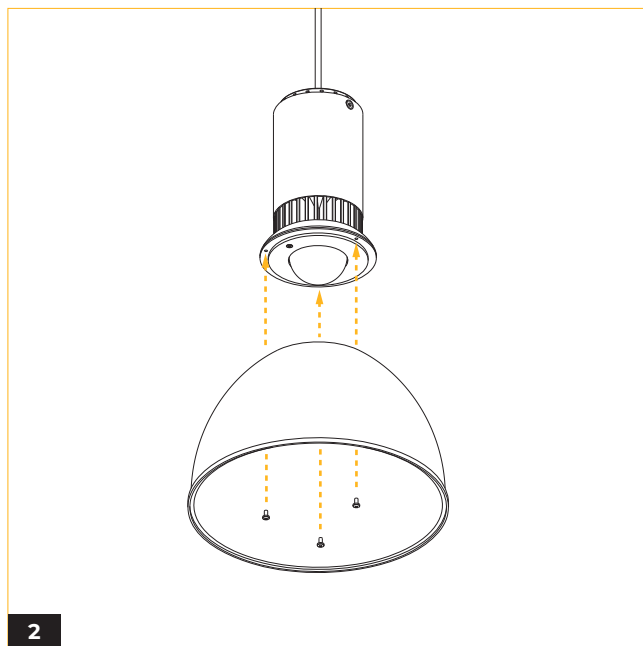


2 Bring shroud to the fixture level and align it to the indicated openings. Fasten shroud in place with three phillips screws.

*\*Clean gloves must be worn to avoid dirt and fingerprints when installing the shroud and diffuser.*

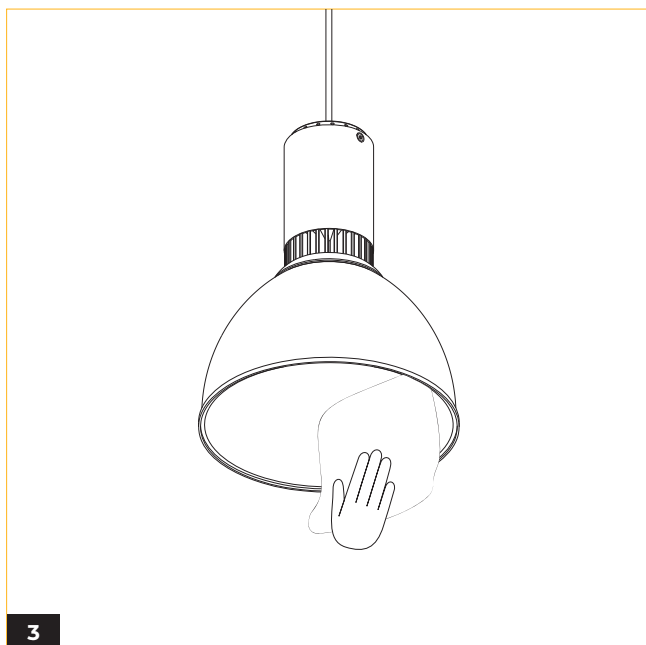

3 Clean the interior and exterior surface using a soft rag with water.

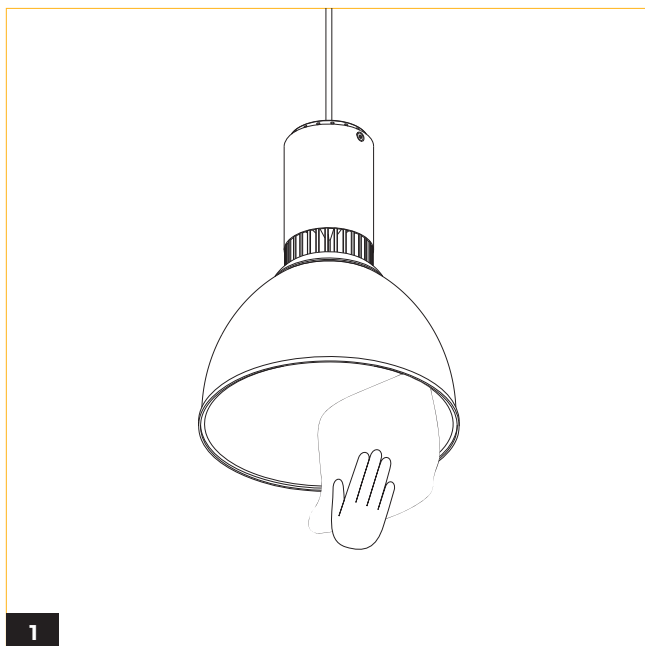

Clean the interior and exterior surface using a soft rag with water.



When specifying the conical lens accessory. Cover the shroud with the conical lens plate and fasten in place using the provided metal band.