

ADVANCED HIGH CEILING

Atria 10 - Outdoor/Natatorium



10-inch Cylinder with aesthetic design and minimal visual impact suited for remodel or new construction.

- Outdoor/Natatorium Rating
Special coating, sealant, and wiring is applied for long term operation in harsh environments.
- Standard
(Please refer to Standard Version spec sheet)
- Tunable White
(Please refer to Tunable White Version spec sheet)
- Warm Dim
(Please refer to Warm Dim Version spec sheet)
- W+RGB
(Please refer to W+RGB Version spec sheet)

Quantity	Type
Project	Note

Electrical System

- 9719lm (80W)
- 12634lm (110W)
- 16451lm (140W)
- 21204lm (180W)
- 24867lm (220W)
- Power Input: Universal (120-277V)
- Operating Temperature: -13°F~112°F
- Surge Protection: 4KV
- Power Factor Greater than 0.9

LED Technology

- 2700K, 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 30°, 45°, 55°, WD
- Rated Life > 60,000 hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%

Housing

- Diameter: 9.4" (238mm)
- Height: 20.5" (520mm)
- Material: Aluminum
- Weight: 30 lbs

Mounting

- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Adjustable Aircraft Cable 10ft

Warranty

- 5 years limited warranty.

Listing

- ETL Wet Location Listed
- DLC Listed
- FCC
- CE



Not all Atria 10 are DLC qualified. For all qualified products. Please visit: www.designlights.org/qpl

Atria 10 - Outdoor/Natatorium



How To Specify:

Ordering Example: AS10-220-408-UNV-STV-45-BLK-ST2-OUT

4-5 weeks lead time on over 75% of specifications.

Model	Wattage	CCT / CRI	Voltage	Dimming
<input type="text" value="AS10"/>	<input type="text"/>	<input type="text"/>	<input type="text" value="UNV"/>	<input type="text"/>
AS10	80 80W	278 2700K / CRI85	UNV 120-277V	STV Standard 0-10V dims to 10%
Atria 10	110 110W	308 3000K / CRI85		
	140 140W	358 3500K / CRI85		
	180 180W	408 4000K / CRI85		
	220 220W	279 2700K / CRI93		
		309 3000K / CRI93		
		359 3500K / CRI93		

Beam Angle	Finish	Mounting	Accessories	Rating
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
30 30°	BLK Black	ST2 Stem 2ft	SPD ¹ Surge Protector	OUT ¹ Outdoor Rating
45 45°	WHT White	ST4 Stem 4ft	HC ² Honeycomb Board	NAT ² Natatorium Rating
55 55°		AD10 Adjustable Cable 10ft		
WD* WIDE				

¹ Outdoor rating: Coating and wiring will be changed to high UV resistant and corrosion resistant materials for long term operation in outdoor environments.

² Natatorium rating: Coating and sealant will be changed to high corrosion resistant materials to prevent damage from long term exposure to chlorine vapors.

* Please factor in change in lumen output with diffuser (-20% with WD ; -12% with other degrees).

DesignLights Consortium™ Qualified Luminaires:

DLC QPL Model Number : AS10-220-408

Not all product variations listed on this page are DLC qualified.

To ensure that a specific model is qualified, visit www.designlights.org/search.

Atria 10 - Outdoor/Natatorium



Delivered Lumens*


Wattage	80W	110W	140W	180W	220W
CCT	CRI:85 / Beam Angle: 30°				
4000K	9719 lm	12634 lm	16451 lm	21204 lm	24867 lm
3500K	9380 lm	12190 lm	15880 lm	20646 lm	24212 lm
3000K	9040 lm	11751 lm	15309 lm	20088 lm	23558 lm
2700K	8454 lm	10990 lm	14309 lm	18972 lm	22249 lm

Current Consumption

Wattage	120V	277V
80W	0.73A	0.32A
110W	1.01A	0.44A
140W	1.28A	0.56A
180W	1.65A	0.71A
220W	2.02A	0.87A

*Tolerance±8%

Dimensions

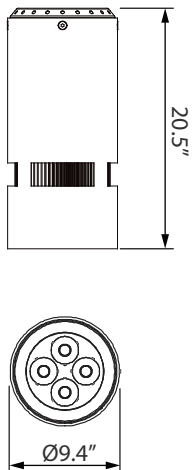

Mounting Options

