

ADVANCED HIGH CEILING
DOT 2.5 - Warm Dim



New Dot 2.5 aperture micro cylinders with up to 1000 lumen output package. Smooth Dim to Dark compatibility with Ward Dim Color Tuning.

Quantity		Type	
Project		Note	

Delivered

Warm Dim	1900K						2700K
0-10V CCT Voltage	0.7	2	4	6	8	10	
15W	50 lm	180 lm	350 lm	550 lm	750 lm	1000 lm	

*Tolerance±8%

Electrical System

- 1000 lm (15W)
- Power Input: Universal (120-277V)
- Operating Temperature: -13°F~104°F
- Surge Protection: 2.5KV

Housing

- Diameter: 2.5" (62mm)
- Height: 7.9" (200mm)
- Material: Aluminum
- Weight: 1.9 lbs

LED Technology

- Warm Dim™ (Tuning White: 1900K ↔ 2700K)
- 93 CRI 15°, 25°, 35°, 45°, 60°
- Beam Angle:

Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft
- Wall Mount
- Surface Adjustable

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1%

Warranty

- 5 year limited warranty

Listing

- ETL Damp Location Listed
- CE



DOT 2.5 - Warm Dim



How To Specify:

Ordering Example: DT2-15-WDIM-UNV-STV-15-BLK-BLK-SUM

4-5 weeks lead time on over 75% of specifications.

Model	Wattage	CCT / CRI	Voltage	Dimming
DT2		WDIM	UNV	
DT2 DOT 2.5"	15 15W	WDIM 1900K - 2700K	UNV 120-277V	STV Standard 0-10V dims to 10% SPV Superior 0-10V dims to dark TRC TRIAC dims to 1% (120V ONLY)

Beam Angle	Finish	Trim Finish	Mounting	Accessories
15 15° 25 25° 35 35° 45 45° 60 60°	BLK Black WHT White SLV Silver	BLK Black WHT White SLV Silver GLD Gold BL Blue <div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 5px;"></div> Black <div style="width: 10px; height: 10px; background-color: white; margin-bottom: 5px; border: 1px solid black;"></div> White <div style="width: 10px; height: 10px; background-color: silver; margin-bottom: 5px; border: 1px solid black;"></div> Silver <div style="width: 10px; height: 10px; background-color: gold; margin-bottom: 5px; border: 1px solid black;"></div> Gold <div style="width: 10px; height: 10px; background-color: blue; margin-bottom: 5px; border: 1px solid black;"></div> Blue </div>	SUM Surface Mount ST2 Stem 2ft ST4 Stem 4ft PL2 Power Line Mount 2ft PL4 Power Line Mount 4ft PL6 Power Line Mount 6ft PL8 Power Line Mount 8ft PL10 Power Line Mount 10ft CM10 Cord Mount 10ft WLM Wall Mount SA2 Surface Adjustable	HC ¹ Honey Comb SL ² Solite Lens

¹Please factor in change in lumen output of -30%.
²Please factor in change in lumen output of -15%.

ADVANCED HIGH CEILING
DOT 2.5 - Warm Dim




Dimensions




Current Consumption

Wattage	Volt	
	120V	277V
15W	0.14A	0.06A


Mounting Options

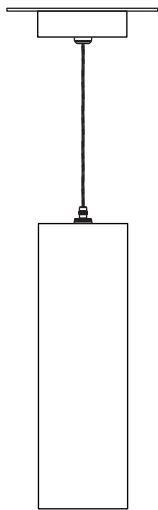


Power Line




Stem

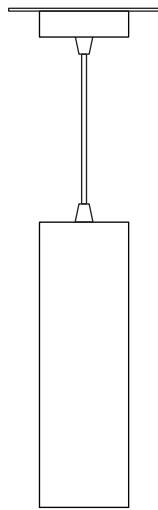


Cord Mount



Surface Mount



Surface Adjustable



Wall Mount